




MOX 602 / MOX 603 / MOX 604 T Series MIL Spec Silicone Rubber Self Fusing Electrical Insulating Tape

500°F / 260°C: Meets MIL-I-46852 / A-A-59163 & Other Proprietary Specifications
 Self Binding Self-Fusing Tape - High Temperature, Heat & Flame Resistant

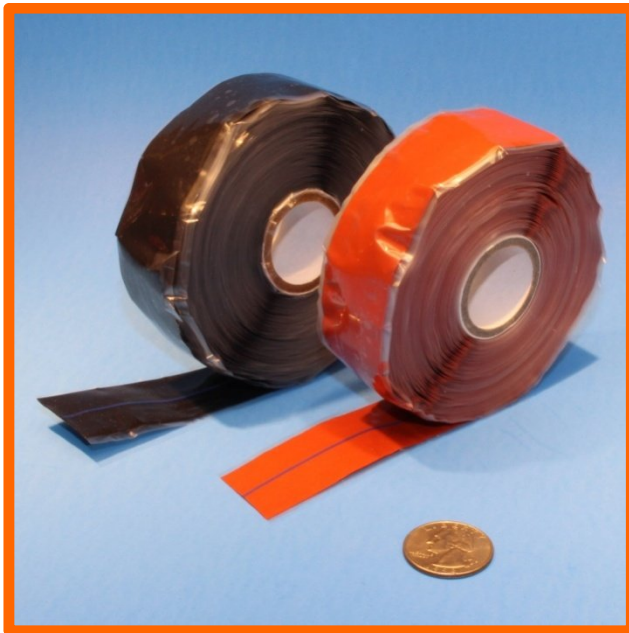

- Self-bonds / self fuses / self amalgamating. No sticky residue or adhesive when removed. Starts fusing within minutes, fully bonded within hours. Excellent cold weather performance. Makes an excellent compression tape.
- Excellent for sealing ends of firesleeve: prevents sleeve from absorbing contamination and wicking liquids. Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening.
- Meets Mil-I-46852 and AA59163 specifications. Certification available.
- Standard roll length is 36 feet / 12 Yards / 10.9 Metres; other lengths available. For the XX value (color code): OR = Oxide-Red, BK = Black. Add \$6.00 for individual roll CofC. Lot/Batch CofC \$10.00 per order line item.

MOX 602 / MOX 603 / MOX 604 T Series MIL Spec High Temperature Silicone Self Fusing Electrical Insulating Tape - Meets MIL-I-46852 and A-A-59163 Specifications

Part Number	Tape Width Inches / mm	Thickness inches / mm	Type / Profile	Single Roll Price Per Roll
602 / 603 / 604 Mil-I-46852 / AA59163 Tapes: Type II				
T-SR-MOX-602-.50-TXX	1/2 / 13	0.020 / 0.50	II / Triangular	\$ 29.37
T-SR-MOX-602-.75-TXX	3/4 / 19	0.020 / 0.50	II / Triangular	\$ 31.96
T-SR-MOX-602-1.0-TXX	1 / 25	0.020 / 0.50	II / Triangular	\$ 33.80
T-SR-MOX-602-1.5-TXX	1 ½ / 38	0.020 / 0.50	II / Triangular	\$ 47.82
T-SR-MOX-603-.50-TXX	1/2 / 13	0.030 / 0.76	II / Triangular	\$ 32.31
T-SR-MOX-603-.75-TXX	3/4 / 19	0.030 / 0.76	II / Triangular	\$ 35.16
T-SR-MOX-603-1.0-TXX	1 / 25	0.030 / 0.76	II / Triangular	\$ 37.18
T-SR-MOX-603-1.5-TXX	1 ½ / 38	0.030 / 0.76	II / Triangular	\$ 52.60
T-SR-MOX-604-.50-TXX	1/2 / 13	0.040 / 1.0	II / Triangular	\$ 35.54
T-SR-MOX-604-.75-TXX	3/4 / 19	0.040 / 1.0	II / Triangular	\$ 38.68
T-SR-MOX-604-1.0-TXX	1 / 25	0.040 / 1.0	II / Triangular	\$ 40.90
T-SR-MOX-604-1.5-TXX	1 ½ / 38	0.040 / 1.0	II / Triangular	\$ 57.87

Please enquire for pricing on sizes other than those listed above.

This tape can be made in thicknesses from 0.010" to 0.080" and in various widths.


Amalgamating time: At 120°C; 120 minutes / at 150°C; 35 minutes / at 200°C; 20 minutes / at 250°C; 15 minutes

Tested for short duration fluid resistance: Jet Fuel (JP5), Hydraulic Fluid (Skydrol 500B4), Mineral Oil (NATO 0142), Synthetic Oil (NATO 0156), MIL-C-87836 & Foran 141B cleaning fluids, MIL-A-8243 cooling fluid.

Type II tapes have a center guideline stripe to assist in making 50% overwraps. The triangular profile version tape allows for minimal ridge lines, providing splices and joints with an almost totally smooth surface (prevents snagging when splice pulled through obstructions).



MOX 615 / MOX 620 / MOX 630 / MOX 640 R Series MIL Spec Silicone Rubber Self Fusing Electrical Insulating Tape
500°F / 260°C: Meets MIL-I-46852 / A-A-59163 & Other Proprietary Specifications
Self Binding Self-Fusing Tape - High Temperature, Heat & Flame Resistant

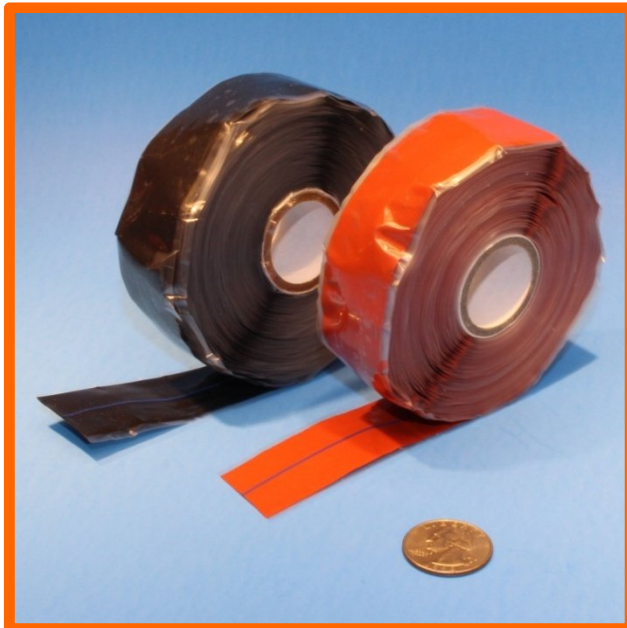

- Self-bonds / self fuses / self amalgamating. No sticky residue or adhesive when removed. Starts fusing within minutes, fully bonded within hours. Excellent cold weather performance. Makes an excellent compression tape.
- Excellent for sealing ends of firesleeve: prevents sleeve from absorbing contamination and wicking liquids. Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening.
- Meets Mil-I-46852 and AA59163 specifications. Certification available.
- Standard roll length is 36 feet / 12 Yards / 10.9 Metres; other lengths available. For the XX value (color code): OR = Oxide-Red, BK = Black. Add \$6.00 for individual roll CofC. Lot/Batch CofC \$18.00 up to 10 rolls and \$25.00 up to 36 rolls.

MOX 620 / MOX 630 / MOX 640 R Series MIL Spec High Temperature Silicone Self Fusing Electrical Insulating Tape. Meets MIL-I-46852 and A-A-59163 Specifications				
Part Number	Tape Width Inches / mm	Thickness inches / mm	Type / Profile	Single Roll Price Per Roll
MOX 615 / MOX 620 / MOX 630 / MOX 640 Mil-I-46852 / AA59163 Tapes: Type I				
T-SR-MOX-620-1.0-RXX	1 / 25	0.015 / 0.38	I / Rectangular	\$ call
T-SR-MOX-620-.50-RXX	1/2 / 13	0.020 / 0.50	I / Rectangular	\$ 29.87
T-SR-MOX-620-.75-RXX	3/4 / 19	0.020 / 0.50	I / Rectangular	\$ 32.76
T-SR-MOX-620-1.0-RXX	1 / 25	0.020 / 0.50	I / Rectangular	\$ 34.71
T-SR-MOX-620-1.5-RXX	1 ½ / 38	0.020 / 0.50	I / Rectangular	\$ 48.92
T-SR-MOX-630-.50-RXX	1/2 / 13	0.030 / 0.76	I / Rectangular	\$ 32.86
T-SR-MOX-630-.75-RXX	3/4 / 19	0.030 / 0.76	I / Rectangular	\$ 36.04
T-SR-MOX-630-1.0-RXX	1 / 25	0.030 / 0.76	I / Rectangular	\$ 38.18
T-SR-MOX-630-1.5-RXX	1 ½ / 38	0.030 / 0.76	I / Rectangular	\$ 53.81
T-SR-MOX-640-.50-RXX	1/2 / 13	0.040 / 1.0	I / Rectangular	\$ 36.15
T-SR-MOX-640-.75-RXX	3/4 / 19	0.040 / 1.0	I / Rectangular	\$ 39.64
T-SR-MOX-640-1.0-RXX	1 / 25	0.040 / 1.0	I / Rectangular	\$ 41.99
T-SR-MOX-640-1.5-RXX	1 ½ / 38	0.040 / 1.0	I / Rectangular	\$ 59.19

Please enquire for pricing on sizes other than those listed above.
This tape can be made in thicknesses from 0.010" to 0.080" and in various widths.

Amalgamating time: At 120°C; 120 minutes / at 150°C; 35 minutes / at 200°C; 20 minutes / at 250°C; 15 minutes

Tested for short duration fluid resistance: Jet Fuel (JP5), Hydraulic Fluid (Skydrol 500B4), Mineral Oil (NATO 0142), Synthetic Oil (NATO 0156), MIL-C-87836 & Foran 141B cleaning fluids, MIL-A-8243 cooling fluid.

MOX 15% & 25% Reinforced / Supported Silicone Rubber Self Fusing Electrical Insulating Tape

500°F / 260°C: Meets MIL-I-46852 / A-A-59163 / MIL-I-24222 & Other Proprietary Specifications

Self Binding Self-Fusing Tape - High Temperature, Heat & Flame Resistant



- Self-bonds / self fuses / self amalgamating. No sticky residue or adhesive when removed. Starts fusing within minutes, fully bonded within hours. Excellent cold weather performance. Makes an excellent compression tape.
- Excellent for sealing ends of firesleeve: prevents sleeve from absorbing contamination and wicking liquids. Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening.
- Meets Mil-I-46852 and AA59163 specifications. Certification available.
- Standard roll length is 36 feet / 12 Yards / 10.9 Metres; other lengths available. For the XX value (color code): OR = Oxide-Red, BK = Black. Add \$6.00 for individual roll CofC. Lot/Batch CofC \$18.00 up to 10 rolls and \$25.00 up to 36 rolls.

MOX 15% & 25% Series MIL Spec High Temperature Silicone Self Fusing Electrical Insulating Tape. Meets MIL-I-46852 and A-A-59163 Specifications				
Part Number	Tape Width Inches / mm	Thickness inches / mm	Type / Profile	Single Roll Price Per Roll
620 / 630 / 640 Mil-I-46852 / AA59163 Tapes: Type I				
ST-SA00520-RXX	1/2 / 13	0.020 / 0.50	I / Rectangular	\$
ST-SA00720-RXX	3/4 / 19	0.020 / 0.50	I / Rectangular	\$
ST-SA01020-RXX	1 / 25	0.020 / 0.50	I / Rectangular	\$
ST-SA01520-RXX	1 ½ / 38	0.020 / 0.50	I / Rectangular	\$
T-SR-MOX-630-.50-RXX	1/2 / 13	0.030 / 0.76	I / Rectangular	\$
T-SR-MOX-630-.75-RXX	3/4 / 19	0.030 / 0.76	I / Rectangular	\$
T-SR-MOX-630-1.0-RXX	1 / 25	0.030 / 0.76	I / Rectangular	\$
T-SR-MOX-630-1.5-RXX	1 ½ / 38	0.030 / 0.76	I / Rectangular	\$
T-SR-MOX-640-.50-RXX	1/2 / 13	0.040 / 1.0	I / Rectangular	\$
T-SR-MOX-640-.75-RXX	3/4 / 19	0.040 / 1.0	I / Rectangular	\$
T-SR-MOX-640-1.0-RXX	1 / 25	0.040 / 1.0	I / Rectangular	\$
T-SR-MOX-640-1.5-RXX	1 ½ / 38	0.040 / 1.0	I / Rectangular	\$

Please enquire for pricing on sizes other than those listed above.

This tape can be made in thicknesses from 0.010" to 0.080" and in various widths.

Amalgamating time: At 120°C; 120 minutes / at 150°C; 35 minutes / at 200°C; 20 minutes / at 250°C; 15 minutes

Tested for short duration fluid resistance: Jet Fuel (JP5), Hydraulic Fluid (Skydrol 500B4), Mineral Oil (NATO 0142), Synthetic Oil (NATO 0156), MIL-C-87836 & Foran 141B cleaning fluids, MIL-A-8243 cooling fluid.