


**Petroleum Hose Group**

**Oil Suction & Discharge Hose - 250PSI**

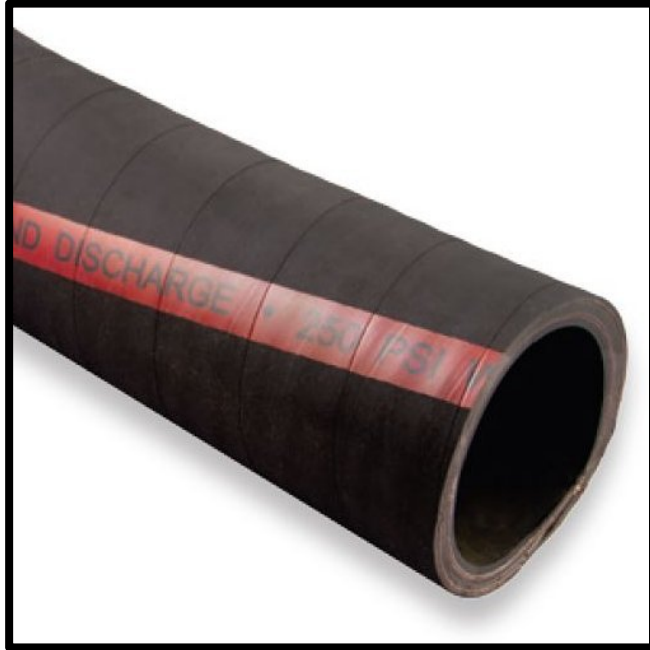

Heavy duty smooth bore dock hose.

Designed for offshore drilling and other demanding applications where a high working pressure is needed along with long lengths.

Standard lengths of 100 feet for sizes 2" through 8". Standard length is 40 feet for sizes 10" and 12".

Cut lengths available: by-the-foot / by-the-yard

Meets USCG 33CFR 154.500 when properly assembled.

**Tech Data:**

Tube: Black, Nitrile, 55% aromatics (ORS)  
 Cover: Black, Neoprene  
 Reinforcement: High tensile tire cord plies; helix wire  
 Working Pressure: 250 PSI Safety Factor: 4:1  
 Temperature: -40°F to 190°F Vacuum Rating: 29 in/HG  
 Ends: Soft cuffs on standard lengths  
 Marking: OIL SUCTION AND DISCHARGE HOSE - 250 PSI WP - MEETS USCG 33CFR 154.400

<b>Petroleum Hose Group</b>					
<b>Oil Suction &amp; Discharge Hose with Flanges - 250PSI / 30inHG</b>					
<b>Part Number</b>	<b>ID Size</b>	<b>OD Size</b>	<b>Bend Radius</b>	<b>Weight</b>	<b>Price</b>
H-P-OSD-250-32	2"	2 15/16"	8"	2.15 lbs / ft	\$ 35.73 / ft
H-P-OSD-250-48	3"	4 1/4"	11"	3.41 lbs / ft	\$ 55.08 / ft
H-P-OSD-250-64	4"	5 5/16"	15"	4.87 lbs / ft	\$ 87.36 / ft
H-P-OSD-250-96	6"	7 3/8"	25"	8.18 lbs / ft	\$ 162.24 / ft
H-P-OSD-250-128	8"	9 3/4"	31"	14.35 lbs / ft	\$ 238.98 / ft
H-P-OSD-250-160	10"	12"	36"	20.49 lbs / ft	\$ 345.45 / ft
H-P-OSD-250-160	12"	14 1/8"	40"	26.49 lbs / ft	\$ 457.35 /ft

**For cut lengths add +15% to pricing**