


Kevlar[®] Braided Aramid Sleeve

320°F / 160°C: Continuous Rating – Higher Temperature for Shorter Periods *FlameShield™ High Temperature, Heat Resistant High Strength & Cut Resistant Expandable Sleeve - Premium Grade*



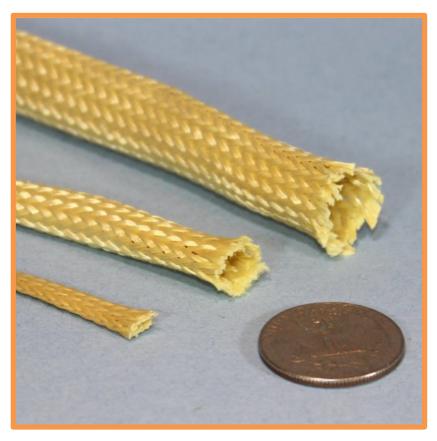

- Kevlar sleeve is soft, pliable, and highly flexible.
- Halogen & asbestos free.
- Fibers are 20 times stronger than steel for the same diameter..
- Highly cut resistant.
- Braid angle allows this sleeve to expand slightly to accommodate irregular surfaces and turns, splices and in-line connectors. Expansion does cause surface coverage to reduce.
- Available in natural (yellow) color.

320°F / 160°C maximum continuous rating with high insulation value & excellent personnel protection. Short term exposure to 572°F / 300°C



Kevlar[®] Braided Aramid Sleeve - (Continued) 320°F / 160°C: Continuous Rating – Higher Temperature for Shorter Periods *FlameShield™ High Temperature, Heat Resistant High Strength & Cut Resistant Expandable Sleeve - Premium Grade*



| FlameShield™ High Temperature & Heat Resistant Braided Kevlar [®] Aramid Sleeve - Premium | | | |
|---|----------------|----------------|---|
| Part Number | Nominal ID | Size Range | Spool Length in feet Bulk / Small |
| S-K-M006-04-X | 1/4" / 6 mm | 1/8" to 5/16" | 500 / 50 |
| S-K-M013-08-X | 1/2" / 13 mm | 5/16" to 5/8" | 250 / 50 |
| S-K-M019-12-X | 3/4" / 19 mm | 9/16" to 1" | 250 / 50 |
| S-K-M025-16-X | 1" / 25 mm | 3⁄4" to 1 1/8" | 200 / 25 |
| S-K-M032-20-X | 1 1/4" / 32 mm | 1" to 1 ½" | 125 / 25 |
| S-K-M038-24-X | 1 1/2" / 38 mm | 1 ¼" to 1 ¾" | 100 / 25 |
| S-K-M051-32-X | 2" / 51 mm | 1 ½" to 2 1/8" | 100 / 25 |
| S-K-M064-40 | 2 ½ / 64mm | NA | 100 |
| S-K-M076-48 | 3" / 76mm | NA | 100 |
| S-K-M089-56 | 3 ½" / 89mm | NA | 100 |
| S-K-M102-64 | 4" / 102mm | NA | 100 |

For the "X" value: "F" for By-The-Foot followed by length in feet (example: F66 = 66 feet) use "B" for Bulk Spool size, use "S" for Small Spool size

This Product is available in spools and for some sizes also By-The-Foot



Kevlar products are difficult to cut due to their strength. Regular or heavy duty scissors can sometimes cut these materials, but often fail quickly as the Kevlar quickly dulls the cutting edge.

Kevlar Shears are specifically designed to cut Kevlar, and feature a serrated blade (or dual serrated blades) so that the fibers don't slip while cutting, holding the fiber in position and allowing for a greater shear force to be applied by the opposing blade.

These shears a Extra Heavy Duty, and can be used for other materials such as cutting steel wires and steel tie wraps. Part number TL-S-KEV-HD. Priced from \$52.00 to \$79.00 depending on blade length.

Kevlar® is a registered trademark of E. I. Du Pont de Nemours and Company