


**Aluminum Braided Sleeve: 5154A Aluminum**  
 1022°F / 550°C:

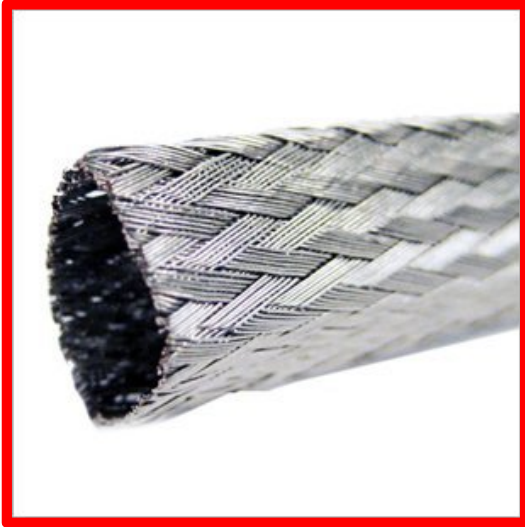

- 1/3 the weight of copper.
- Abrasion Protection & Crush Resistance.
- EMI / RFI Protection.
- Can be secured with metal tie wraps, bands, and clamps.
- Supplied as a round sleeve, coiled and boxed.
- Highly flexible and small bend radius.
- RoHS compliant

Aluminum Braided Sleeve			
Part Number	I.D. inch / m m	Weight per 1000 foot in lbs.	Price per Foot
S-METAL-AL-0.125-M0031	0.125 / 3.1	4.3	Call
S-METAL-AL-0.187-M0047	0.187 / 4.7	7.3	Call
S-METAL-AL-0.250-M0063	0.250 / 6.3	12.7	Call
S-METAL-AL-0.375-M0095	0.375 / 9.5	13.3	Call
S-METAL-AL-0.500-M0127	0.500 / 12.7	17.6	Call
S-METAL-AL-0.625-M0158	0.625 / 15.8	18.7	Call
S-METAL-AL-0.875-M0222	0.875 / 22.2	41.0	Call
S-METAL-AL-1.000-M0254	1.000 / 25.4	46.6	Call
S-METAL-AL-2.000-M0508	2.000 / 50.8	76.6	Call