


## Nomex® Split Sleeve Wrap

450°F / 232°C: Continuous Rating – Higher Temperature for Shorter Periods

FlameShield™ High Temperature, Heat & Flame Resistant Expandable Sleeve – Premium Grade

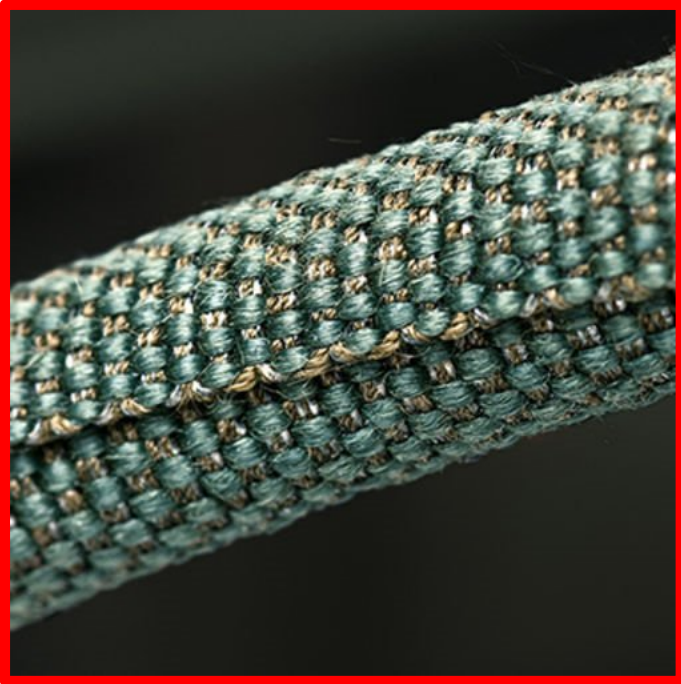

- Genuine Dupont Nomex® with a pre-stressed PET filament which provides the natural closed wrap form
- Soft and pliable.
- Fire retardant.
- Halogen & asbestos free.
- Cuts easily to length with scissors.
- Green color only.
- .027" wall thickness.
- 392°F / 200°C operating temperature.
- 662°F / 350°C melting/deterioration temperature.
- Includes a tracer line that shows the maximum operating diameter so the sleeve is not overfilled.

450°F / 232°C continuous rating, high insulation value & excellent personnel protection

FlameShield™ Nomex® Split Sleeve Wrap High Temperature & Heat Resistant – Premium Grade		
Part Number	Nominal ID	Quantity per Box Bulk / Shop / Mini in feet
S-NMX-SP-0.1875-M0047-03-X	3/16"	1200 / 600 / 200
S-NMX-SP-0.312-M0079-05-X	5/16"	650 / 325 / 125
S-NMX-SP-0.500-M013-08-X	1/2"	300 / 150 / 75
S-NMX-SP-0.625-M016-10-X	5/8"	250 / 125 / 75
S-NMX-SP-0.750-M019-12-X	3/4"	150 / 100 / 50
S-NMX-SP-1.000-M025-16-X	1"	100 / 75 / 50
S-NMX-SP-1.250-M032-20-X	1 1/4"	100 / 50 / 25
S-NMX-SP-1.500-M038-24-X	1 1/2"	50 / 25 / NA

For the "X" value, use "B" for Bulk Box or "S" for Shop Box or "M" for Mini Box

Please call for additional discount pricing when ordering multiple spools.

**This Product is NOT Available By-The-Foot**