


Abrasion & Wear Resistant Nylon 6-6 Braided Sleeve .020" Monofilament Construction Very High Abrasion Resistance for Hose, Wire and Cable Protection



- Abrasion and wear resistant protection sleeve for hoses, wires and cables.
- Made from 20 mil (.020") monofilament Nylon 6-6 – provides a tight weave and smooth surface resists abrasive wear. Wall thickness .04"
- Expandable for ease of installation. Easily cut to length with heat knife.
- Nylon 6-6 provides excellent UV protection.
- Minimum temperature: -76°F / -60°C. Maximum continuous 302°F / 150°C (MIL-I-23053). Melting temperature 509°F / 265°C.
- 2500 abrasion cycle rated

- Tensile strength - yarn: 19 lbs (ASTM D-2265).

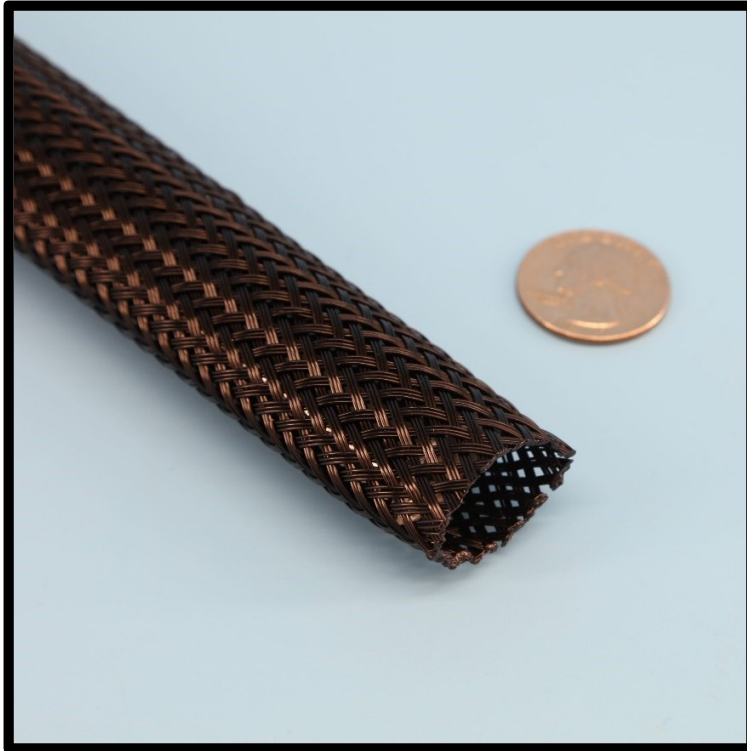

Scuff-Sleeve™ Braided Nylon Expandable Protection Sleeve fabricated from .020" Monofilament elements. Wall thickness .04"			
Part Number	Nominal Size	Range	Bulk / Shop Spool Size
S-NY-APS-ES20-0.25-M006-04-X	0.25"	0.25 – 0.50	500 ft / 100 ft
S-NY-APS-ES20-0.50-M013-08-X	0.50"	0.50 – 1.00	250 ft / 100 ft
S-NY-APS-ES20-0.75-M019-12-X	0.75"	0.75 – 1.25	250 ft / 50 ft
S-NY-APS-ES20-1.00-M025-16-X	1.00"	1.00 – 1.50"	250 ft / 50 ft
S-NY-APS-ES20-1.25-M032-20-X	1.25"	1.25 – 2.00	250 ft / 50 ft
S-NY-APS-ES20-1.75-M044-28-X	1.75"	1.75 – 2.75	100 ft / 25 ft
S-NY-APS-ES20-2.25-M057-36-X	2.25"	2.25 – 3.00	100 ft / 25 ft

For the "X" value in the part number: specify "B" for Bulk Spool or "S" for Shop Spool

Abrasion & Wear Resistant Nylon 6-6 Braided Sleeve
.050 Flattened Monofilament Construction
Extremely high abrasion resistance for Hose, Wire and Cable Protection



- Abrasion and wear resistant protection sleeve for hoses, wires and cables.
- Made from flattened 50 mil (.050") monofilament nylon 6-6 – provides a tight weave and smooth surface resists abrasive wear.
- Expandable.
- Nylon 6 provides excellent UV protection.
- Easily cut to length with heat knife.
- Minimum temperature: -76°F / -60°C. Maximum continuous 302°F / 150°C (MIL-I-23053). Melting temperature 509°F / 265°C.
- 4400 abrasion cycle rated



Scuff-Sleeve™ Braided Nylon Expandable Protection Sleeve Fabricated from Flattened .050" Monofilament			
Part Number	Nominal Size	Range	Spool Size Bulk / Shop Spool
S-NY-APS-ES50-0.38-M010-06-X-Y	0.38"	0.250 – 0.500	500 ft / 100 ft
S-NY-APS-ES50-0.50-M013-08-X-Y	0.50"	0.375 – 0.625	500 ft / 100 ft
S-NY-APS-ES50-0.75-M019-12-X-Y	0.75"	0.625 – 1.00	250 ft / 50 ft
S-NY-APS-ES50-1.00-M025-16-X-Y	1.00"	0.975 – 1.25"	250 ft / 50 ft
S-NY-APS-ES50-1.25-M032-20-X-Y	1.25"	1.00 – 1.50	250 ft / 50 ft
S-NY-APS-ES50-1.75-M044-28-X-Y	1.75"	1.50 – 2.00	100 ft / 25 ft
S-NY-APS-ES50-2.00-M052-32-X-Y	2.00"	1.75 – 2.75	100 ft / 25 ft
S-NY-APS-ES50-3.00-M075-48-X-Y	3.00"	2.25 – 3.50	100 ft / 25 ft

For the "X" value in the part number:
specify "BK" for Black, "YL" for Yellow. "OR" for Orange, "SB" for Silver/Black
For the "Y" value in the part number: specify "B" for Bulk Spool or "S" for Shop Spool