


Nylon Abrasion & Wear Protection Sleeve – MIL Spec 375°F / 190°C: Abrasion & Wear Resistant Scuff-Sleeve™: for Hose, Wire and Cable Protection – Meets A-A-59301 & MIL-C-572 Specifications

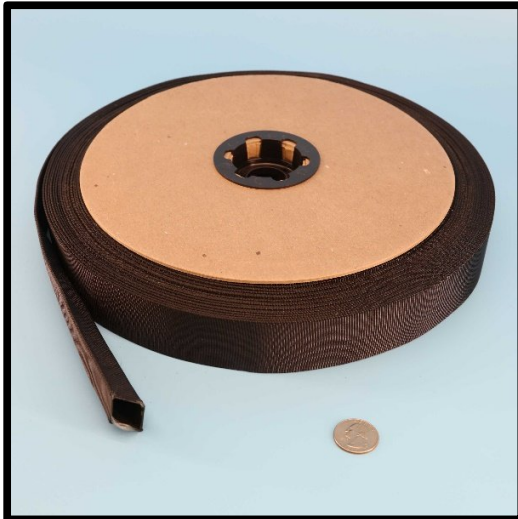

- Abrasion, wear, puncture and cut resistant protection sleeve for hoses, wires and cables.
- Conforms to Commercial Item Description (CID) A-A-59301 and specification MIL-C-572.
- Tight weave and smooth surface resists abrasive wear.
- Nylon 6 provides excellent UV protection.
- Easily cut to length or cut with heat knife.
- Useable -60°F to +375°F.
- For heavier wall see part number S-NY-APS-MILHD.

Helps to organize and bundle hoses and cables, while proving heat resistance to a maximum of 375°F continuous duty, and provides excellent abrasion, puncture, cut, scuff and wear resistance.

Scuff-Sleeve™ Nylon Abrasion & Wear Protection Sleeve Meets A-A-59301 and MIL-C-572 Specifications					
Part Number	ID Size inch / mm / -dash			Wall Thickness	Spool Feet
S-NY-APS-MIL-0.0625-M002-01	1/16	1.58	-01	.027	500
S-NY-APS-MIL-0.1250-M003-02	1/8	3.17	-02	.027	500
S-NY-APS-MIL-0.1875-M005-03	3/16	4.76	-03	.026	500
S-NY-APS-MIL-0.2500-M006-04	1/4	6.35	-04	.025	500
S-NY-APS-MIL-0.3125-M008-05	5/16	7.93	-05	.025	500
S-NY-APS-MIL-0.3750-M010-06	3/8	9.52	-06	.024	250
S-NY-APS-MIL-0.4375-M011-07	7/16	11.12	-07	.024	250
S-NY-APS-MIL-0.5000-M013-08	1/2	12.7	-08	.024	250
S-NY-APS-MIL-0.6250-M016-10	5/8	15.87	-10	.033	150 / 250
S-NY-APS-MIL-0.7500-M019-12	3/4	19.05	-12	.037	150 / 250
S-NY-APS-MIL-0.8750-M022-14	7/8	22.22	-14	.036	100 / 250
S-NY-APS-MIL-1.0000-M025-16	1	25.4	-16	.040	100 / 250
S-NY-APS-MIL-1.1250-M029-18	1 1/8	28.57	-18	.040	100 / 250
S-NY-APS-MIL-1.2500-M032-20	1 1/4	31.75	-20	.048	100 / 250
S-NY-APS-MIL-1.5000-M038-24	1 1/2	38.10	-24	.044	100
S-NY-APS-MIL-1.7500-M045-28	1 3/4	44.45	-28	.045	100
S-NY-APS-MIL-2.0000-M051-32	2	50.8	-32	.047	100

- Other lengths may be available: please enquire.
- This sleeve is non-expandable – please measure your application carefully.