Nylon Abrasion & Wear Protection Sleeve

325°F / 162°C: Abrasion & Wear Resistant Scuff-Sleeve™: for Hose, Wire and Cable Protection

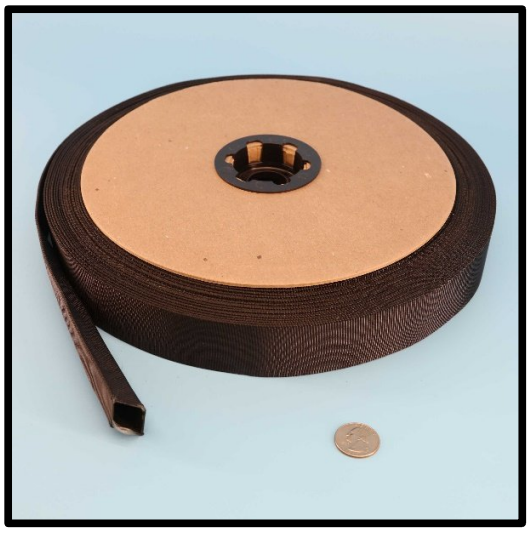

- Abrasion, wear, puncture and cut resistant protection sleeve for hoses, wires and cables.
- Exceeds the new “Line of Sight” operator protection regulations EN982 ISO norm 833 EN414 for hose blowout.
- Ultra tight weave provides leak containment.
- Tight weave and smooth surface resists abrasive wear.
- Less bulky than older cordura sleeves.
- Nylon 6 provides excellent UV protection.
- MSHA approved.
- Exceeds ISO 6945 abrasion standard and ISO 8031 conductivity standard.
- Easily cut to length or cut with heat knife.
- Useable -60°F to +325°F.
- Also available as a Sleeve with Velcro for easy retrofit onto wires, cables or hoses that are already in place.

Helps to organize and bundle hoses and cables, while proving heat resistance to a maximum of 375°F continuous duty, and provides excellent abrasion, scuff and wear resistance.

Scuff-Sleeve™ Nylon Abrasion Protection Sleeve			
Part Number	**ID Size inch / mm / -dash**		
S-NY-APS-0.67-M017-11	0.67	17	-11
S-NY-APS-0.79-M020-13	0.79	20	-13
S-NY-APS-0.91-M023-15	0.91	23	-15
S-NY-APS-0.98-M024-16	0.98	24	-16
S-NY-APS-1.06-M026-17	1.06	26	-17
S-NY-APS-1.22-M030-20	1.22	30	-20
S-NY-APS-1.42-M036-23	1.42	36	-23
S-NY-APS-1.57-M039-26	1.57	39	-26
S-NY-APS-1.73-M043-28	1.73	43	-28
S-NY-APS-1.85-M047-30	1.85	47	-30
S-NY-APS-2.17-M055-35	2.17	55	-35
S-NY-APS-2.36-M059-38	2.36	59	-38
S-NY-APS-2.62-M066-42	2.62	66	-42
S-NY-APS-2.87-M072-46	2.87	72	-46
S-NY-APS-3.14-M080-48	2.95	80	-48
S-NY-APS-3.66-M092-59	3.66	92	-59
S-NY-APS-3.94-M100-63	3.94	100	-63
S-NY-APS-4.41-M112-70	4.41	112	-70
S-NY-APS-4.94-M125-80	4.94	125	-80
S-NY-APS-5.75-M146-92	5.75	146	-92

- Sold in standard lengths of 150 and 300 feet. Other lengths may be available: please enquire. This sleeve is non-expandable – please measure your application carefully.