




Nylon with PVC Coating Abrasion Protection Sleeve with Hook & Loop Closure - Light Duty

**375°F / 190°C: Abrasion and Wear Resistance
for Wire, Cable and Hose Protection**

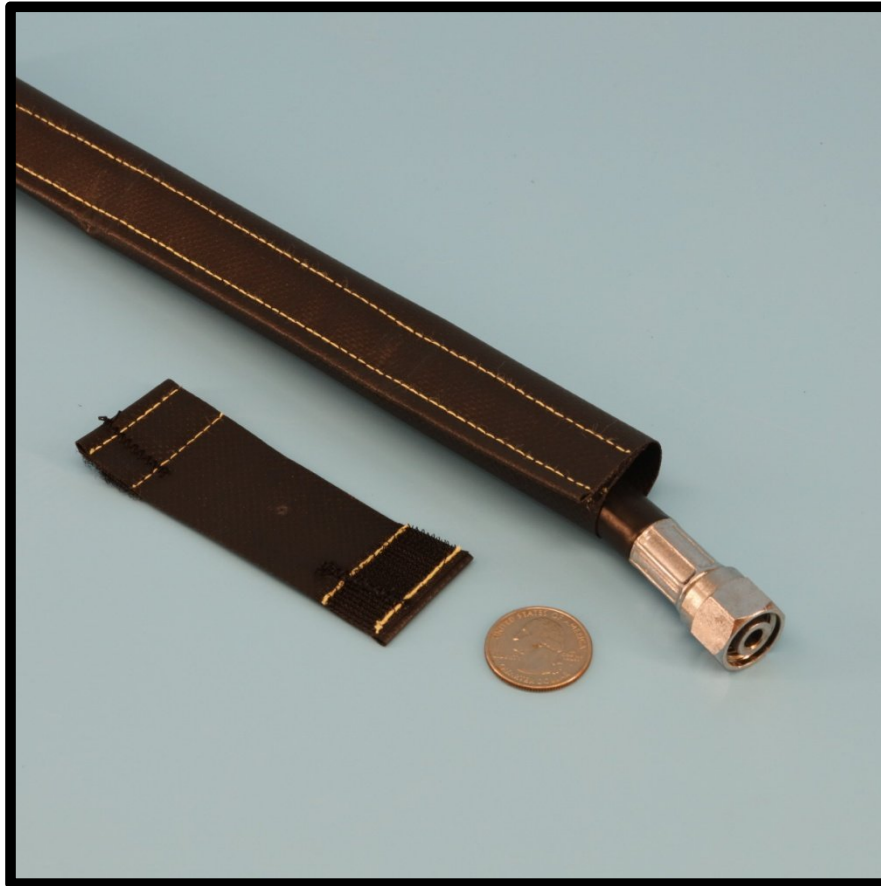


- Light duty abrasion and wear resistance for hoses, wire and cables.
- Sleeve with hook and loop for easy retrofit installation. Easy inspection.
- This sleeve is flexible PVC over a 600 denier nylon base fabric. Excellent protection for cables and hoses used on the ground, for construction equipment, drill rigs, etc.
- Temperature range - 13°F / -25°C to +158°F / 70°C.
- Very good UV protection
- Not recommended for welding applications. (Use sleeve with "WELD" in the part number)

Sold in 50 foot increments up to 150 feet continuous rolls. Available in standard sizes; larger or custom sizes can be easily fabricated if required. Helps to organize and bundle hoses and cables, excellent abrasion, scuff and wear resistance.

Other heavier duty materials available.

Nylon with PVC Coating Abrasion Protection Sleeve with Hook & Loop Closure (Continued)

375°F / 190°C: Abrasion and Wear Resistance for Wire, Cable and Hose Protection

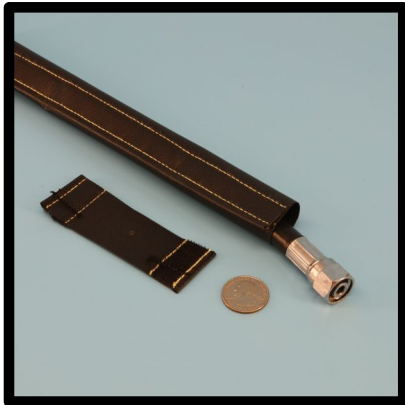

Scuff-Sleeve™ VCL: Nylon 600 with PVC Coating Abrasion Protection Sleeve with Hook and Loop Closure				
Part Number	Size			Price per Foot
	inch	mm	-dash	
*S-NY600-PVC-APS-VCL-M025-16	1.00	25	-16	\$ 6.40
*S-NY600-PVC-APS-VCL-M038-24	1.50	38	-24	\$ 7.70
S-NY600-PVC-APS-VCL-M044-28	1.75	44	-28	\$ 8.93
S-NY600-PVC-APS-VCL-M051-32	2.00	51	-32	\$ 9.13
S-NY600-PVC-APS-VCL-M060-38	2.38	60	-38	\$ 9.26
S-NY600-PVC-APS-VCL-M064-40	2.50	64	-40	\$ 9.43
S-NY600-PVC-APS-VCL-M070-44	2.75	70	-44	\$ 10.40
S-NY600-PVC-APS-VCL-M076-48	3.00	76	-48	\$ 10.46
S-NY600-PVC-APS-VCL-M083-52	3.25	83	-52	\$ 10.53
S-NY600-PVC-APS-VCL-M089-56	3.50	89	-56	\$ 10.56
S-NY600-PVC-APS-VCL-M102-64	4.00	102	-64	\$ 12.56
S-NY600-PVC-APS-VCL-M114-72	4.50	114	-72	\$ 12.63
S-NY600-PVC-APS-VCL-M127-80	5.00	127	-80	\$ 12.70
S-NY600-PVC-APS-VCL-M152-96	6.00	152	-96	\$ 15.56
S-NY600-PVC-APS-VCL-M178-112	7.00	165	-104	\$ 16.20
S-NY600-PVC-APS-VCL-M203-128	8.00	203	-128	\$ 17.43
S-NY600-PVC-APS-VCL-M241-152	9.50	241	-152	\$ 19.10
S-NY600-PVC-APS-VCL-M254-160	10.00	254	-160	\$ 20.70
S-NY600-PVC-APS-VCL-M279-176	11.00	279	-176	\$ 22.80
S-NY600-PVC-APS-VCL-M305-192	12.00	305	-192	\$ 26.93

Minimum Order Quantity may be in effect for smaller diameters

Width of the Velcro is 1.5" except part numbers indicated with (*) which is .75".


Other sizes up to 16" ID are available



Abrasion & Wear Protection Sleeve with Hook & Loop Closure for Wires, Cables and Hoses

1050 Denier Ballistic Nylon with Light PU Coating - Light Duty

-60°F / -51°C to 275°F / 135°C Temperature Range

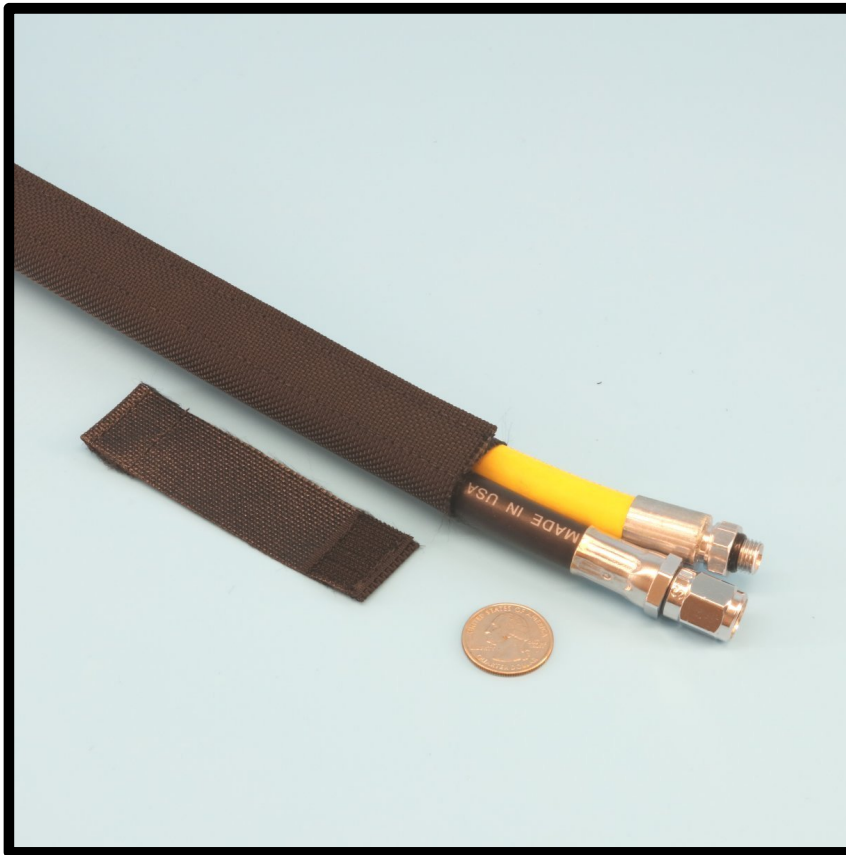

- Light duty abrasion and wear resistance for hoses, wire and cables.
- This sleeve has a hook and loop closure for easy retrofit installation.
- Used on mobile equipment and CE approved equipment for operator protection from hose failure.
- This sleeve is made from 1050 denier ballistic nylon which has a 1.7mil urethane coating for repelling surface moisture. 13.5oz/yd² material weight. Temperature range -60°C to +275°F. Very good UV protection.
- This is our most popular abrasion protection sleeve with a plain nylon fabric.
- Helps to organize and bundle hoses and cables; excellent abrasion, scuff and wear resistance
- Not recommended for welding applications. (Use sleeve with "WELD" in the part number).

One side of the material has a urethane coating, giving it a slightly shiny appearance. The sleeve should be installed with the coated side on the inside.

Abrasion & Wear Protection Sleeve with Hook & Loop Closure for Wires, Cables and Hoses: 1050 Denier Ballistic Nylon with light PU Coating (Continued)
-60°F / -51°C to 275°F / 135°C Temperature Range



Scuff-Sleeve™ VCL: 1050 Ballistic Nylon Abrasion & Wear Protection Sleeve with Velcro Closure for wire, cable and hose						
Part Number	ID Size			Price		
	inch	mm	-dash	150 foot roll	50 foot roll	Per Foot
*S-NY1050-VCL-1.000-M025-16-X	1.00	25	-16	\$ 745.20	\$ 262.20	\$ 5.52
*S-NY1050-VCL-1.300-M033-21-X	1.30	33	-21	\$ 847.80	\$ 298.30	\$ 6.28
*S-NY1050-VCL-1.500-M038-24-X	1.50	38	-24	\$ 899.10	\$ 316.35	\$ 6.67
S-NY1050-VCL-1.750-M044-28-X	1.75	44	-28	\$ 1123.20	\$ 395.20	\$ 8.32
S-NY1050-VCL-2.000-M051-32-X	2.00	51	-32	\$ 1150.20	\$ 404.70	\$ 8.52
S-NY1050-VCL-2.380-M060-38-X	2.38	60	-38	\$ 1225.80	\$ 431.30	\$ 9.08
S-NY1050-VCL-2.500-M064-40-X	2.50	64	-40	\$ 1285.20	\$ 452.20	\$ 9.52
S-NY1050-VCL-2.750-M070-44-X	2.75	70	-44	\$ 1417.50	\$ 498.75	\$ 10.50
S-NY1050-VCL-3.000-M076-48-X	3.00	76	-48	\$ 1428.30	\$ 502.55	\$ 10.58
S-NY1050-VCL-3.250-M083-52-X	3.25	83	-52	\$ 1433.70	\$ 504.45	\$ 10.62
S-NY1050-VCL-3.500-M089-56-X	3.50	89	-56	\$ 1441.80	\$ 507.30	\$ 10.68
S-NY1050-VCL-4.000-M102-64-X	4.00	102	-64	\$ 1717.20	\$ 604.20	\$ 12.72
S-NY1050-VCL-4.500-M114-72-X	4.50	114	-72	\$ 1725.30	\$ 607.05	\$ 12.78
S-NY1050-VCL-5.000-M127-80-X	5.00	127	-80	\$ 1736.10	\$ 610.85	\$ 12.86
S-NY1050-VCL-6.000-M152-96-X	6.00	152	-96	\$ 2316.60	\$ 815.10	\$ 17.16
S-NY1050-VCL-7.000-M178-112-X	7.00	178	-112	\$ 2408.40	\$ 847.40	\$ 17.84
S-NY1050-VCL-8.000-M203-128-X	8.00	203	-128	\$ 2592.00	\$ 912.00	\$ 19.20
S-NY1050-VCL-9.000-M228-144-X	9.00	228	-144	\$ 2778.30	\$ 977.55	\$ 20.58
S-NY1050-VCL-10.000-M254-160-X	10.00	254	-160	\$ 3534.30	\$ 1243.55	\$ 26.18
S-NY1050-VCL-11.000-M279-176-X	11.00	279	-176	\$ 3688.20	\$ 1297.70	\$ 27.32
S-NY1050-VCL-12.000-M305-192-X	12.00	305	-192	\$ 3920.40	\$ 1379.40	\$ 29.04

For the "X" value in the part number:


"FOOT" for By-The-Foot, "150ROLL" for 150 foot roll "50ROLL" for 50 foot roll

Width of the Velcro is 1.5" except part numbers indicated with (*) which is .75".

THIS PRODUCT IS AVAILABLE IN ANY ID SIZE – PLEASE ASK FOR A QUOTE




Abrasion & Wear Protection Sleeve with Hook & Loop Closure for Wires, Cables and Hoses: 1000 Denier Nylon Medium Duty -60°F / -51°C to 275°F / 135°C Temperature Range

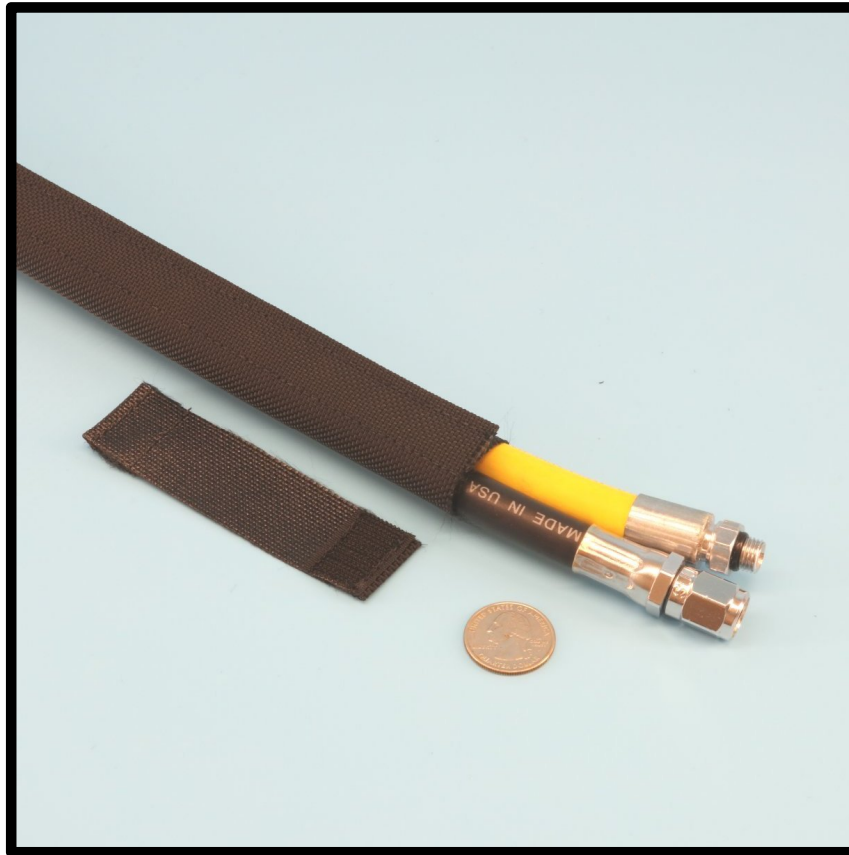

- Medium duty abrasion resistance for hoses, wire and cables.
- Sleeve with hook and loop for easy retrofit.
- Heavy urethane coating provides low coefficient of friction.
- Meets MIL-C-83489, FED-STD-191A, MIL-STD-810F
- This sleeve is made from 1000 denier nylon which has a 5mil urethane coating for repelling surface moisture. 13.5oz/yd² material weight. Temperature range - 60°C to +275°F. Very good UV protection.
- Helps to organize and bundle hoses and cables; excellent abrasion, scuff and wear resistance
- Not recommended for welding applications. (Use sleeve with "WELD" in the part number).

**Abrasion & Wear Protection Sleeve with Hook & Loop Closure for Wires, Cables and Hoses: 1000 Denier Nylon with heavy PU coating
-60°F / -51°C to 275°F / 135°C Temperature Range**

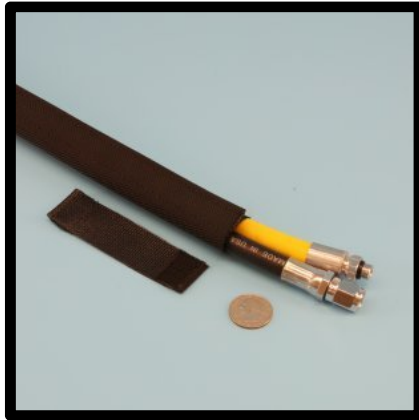

Scuff-Sleeve™ VCL: 1000 Denier Nylon with PU Coating / Enhanced Abrasion & Wear Protection Sleeve with hook & loop Closure for wire, cable and hose						
Part Number	ID Size			Price		
	inch	mm	-dash	150 foot roll	50 foot roll	Per Foot
*S-NY1000-VCL-1.000-M025-16-X	1.00	25	-16	\$ 918.00	\$ 323.00	\$ 6.80
*S-NY1000-VCL-1.300-M033-21-X	1.30	33	-21	\$ 1043.55	\$ 367.17	\$ 7.73
*S-NY1000-VCL-1.500-M038-24-X	1.50	38	-24	\$ 1107.00	\$ 389.50	\$ 8.20
S-NY1000-VCL-1.750-M044-28-X	1.75	44	-28	\$ 1386.45	\$ 487.83	\$ 10.27
S-NY1000-VCL-2.000-M051-32-X	2.00	51	-32	\$ 1421.55	\$ 500.18	\$ 10.53
S-NY1000-VCL-2.380-M060-38-X	2.38	60	-38	\$ 1507.95	\$ 530.58	\$ 11.17
S-NY1000-VCL-2.500-M064-40-X	2.50	64	-40	\$ 1583.55	\$ 557.18	\$ 11.73
S-NY1000-VCL-2.750-M070-44-X	2.75	70	-44	\$ 1750.95	\$ 616.08	\$ 12.97
S-NY1000-VCL-3.000-M076-48-X	3.00	76	-48	\$ 1764.45	\$ 620.83	\$ 13.07
S-NY1000-VCL-3.250-M083-52-X	3.25	83	-52	\$ 1768.50	\$ 622.25	\$ 13.10
S-NY1000-VCL-3.500-M089-56-X	3.50	89	-56	\$ 1777.95	\$ 625.58	\$ 13.17
S-NY1000-VCL-4.000-M102-64-X	4.00	102	-64	\$ 2115.45	\$ 744.33	\$ 15.67
S-NY1000-VCL-4.500-M114-72-X	4.50	114	-72	\$ 2123.55	\$ 747.18	\$ 15.73
S-NY1000-VCL-5.000-M127-80-X	5.00	127	-80	\$ 2137.05	\$ 751.93	\$ 15.83
S-NY1000-VCL-6.000-M152-96-X	6.00	152	-96	\$ 2857.95	\$ 1005.58	\$ 21.17
S-NY1000-VCL-7.000-M178-112-X	7.00	178	-112	\$ 2965.95	\$ 1043.58	\$ 21.97
S-NY1000-VCL-8.000-M203-128-X	8.00	203	-128	\$ 3190.05	\$ 1122.43	\$ 23.63

For the "X" value in the part number:


"FOOT" for By-The-Foot, "150ROLL" for 150 foot roll "50ROLL" for 50 foot roll

Width of the Velcro is 1.5" except part numbers indicated with (*) which is .75".

THIS PRODUCT IS AVAILABLE IN ANY ID SIZE – PLEASE ASK FOR A QUOTE



Extreme Abrasion & Wear Protection Sleeve with Hook & Loop Closure for Wires, Cables and Hoses 1500 Denier Nylon with HD Poly Coating -60°F / -51°C to 275°F / 135°C Temperature Range

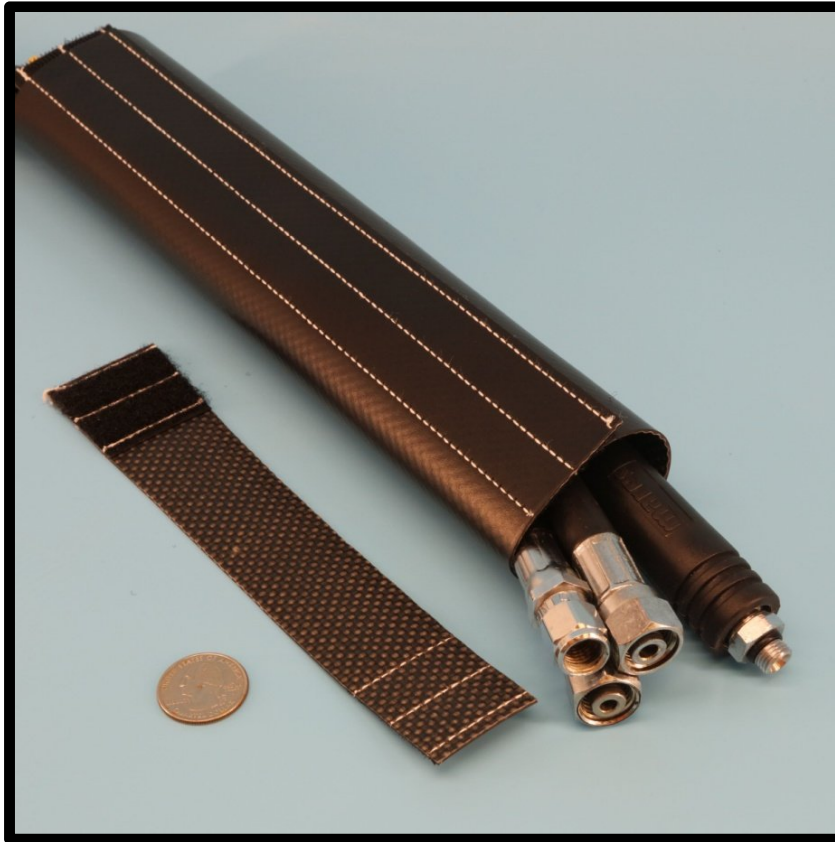


- Enhanced abrasion resistance for hoses, wire and cables.
- Sleeve with hook and loop for easy retrofit.
- Meets UV protection standard EN13758-1, Top Rating of 80
- MSHA - IC289 approved
- Meets ISO 6945 specifications - 500,000+ abrasion cycles.
 - The coating is thicker on one side, the base material is visible through the coating on the thin side and the thin side should be the inside when the sleeve is closed.
- Not recommended for welding applications. (for welding applications use sleeve with "WELD" in the part number).
- This sleeve is made from 1500 denier nylon which has a polymer coating for advanced abrasion protection and the ability to repel surface moisture. 40oz/yd² material weight.
- Temperature range - 60°C to +275°F.
- Very good UV protection.
- Helps to organize and bundle hoses and cables; excellent abrasion, scuff and wear resistance.

Extreme Abrasion & Wear Protection Sleeve with Hook & Loop Closure for Wires, Cables and Hoses

1500 Denier with HD Poly Coating

-60°F / -51°C to 275°F / 135°C Temperature Range

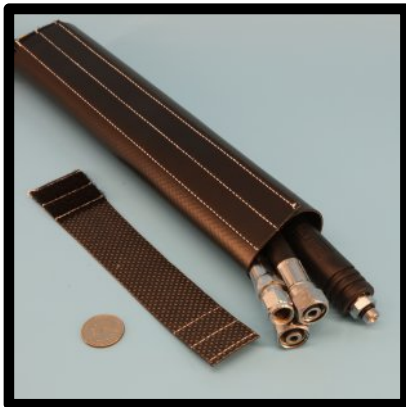

Scuff-Sleeve™ VCL: XHD Nylon / Enhanced Abrasion & Wear Protection Sleeve with Velcro Closure for wire, cable and hose				
Part Number	ID Size inch / mm / -dash			Price
				75 foot roll
*S-NY1500-PVC-VCL-1.75-M044-28	1.75	44	-28	\$ 1582.50
S-NY1500-PVC-VCL-2.00-M051-32	2.00	51	-32	\$ 1591.88
S-NY1500-PVC-VCL-2.38-M060-38	2.38	60	-38	\$ 1612.50
S-NY1500-PVC-VCL-2.50-M064-40	2.50	64	-40	\$ 1758.75
S-NY1500-PVC-VCL-2.75-M070-44	2.75	70	-44	\$ 1805.63
S-NY1500-PVC-VCL-3.00-M076-48	3.00	76	-48	\$ 1873.13
S-NY1500-PVC-VCL-3.25-M083-52	3.25	83	-52	\$ 1938.75
S-NY1500-PVC-VCL-3.50-M089-56	3.50	89	-56	\$ 1995.00
S-NY1500-PVC-VCL-4.00-M102-64	4.00	102	-64	\$ 2326.88
S-NY1500-PVC-VCL-4.50-M114-72	4.50	114	-72	\$ 2336.25
S-NY1500-PVC-VCL-5.00-M127-80	5.00	127	-80	\$ 2358.75
S-NY1500-PVC-VCL-6.00-M152-96	6.00	152	-96	\$ 3150.00
S-NY1500-PVC-VCL-7.00-M178-112	7.00	178	-112	\$ 3189.38
S-NY1500-PVC-VCL-8.00-M203-128	8.00	203	-128	\$ 3236.25
S-NY1500-PVC-VCL-9.00-M228-144	9.00	228	-144	\$ 3369.38
S-NY1500-PVC-VCL-10.00-M241-152	10.00	254	-160	\$ 4089.38

Width of the Velcro is 1.5" except part numbers indicated with (*) which is .75".