


InsulShrink™ Polyolefin Glossy Shrink Tubing

2:1 shrink ratio - 194°F / 90°C Shrink Temperature



- Good general chemical resistance.
- Easily cut to length.
- Excellent UV resistance
- Shrink temperature 239F

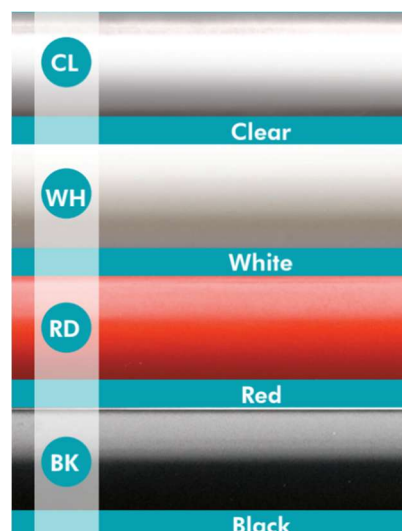

InsulShrink™ Polyolefin Glossy Heatshrink Tubing 2:1 shrink ratio			
Part Number	Shrink Range Preshrunk → Shrunk	Length, ft	
		Bulk Box / Small Box	
ST-P2-GL-0.1250-XX-Y	0.125 → 0.062	500	25
ST-P2-GL-0.1875-XX-Y	0.187 → 0.093	200	25
ST-P2-GL-0.2500-XX-Y	0.250 → 0.125	200	25
ST-P2-GL-0.3750-XX-Y	0.375 → 0.187	200	25
ST-P2-GL-0.5000-XX-Y	0.500 → 0.250	200	25
ST-P2-GL-0.7500-XX-Y	0.750 → 0.375	100	25
ST-P2-GL-1.0000-XX-Y	1.000 → 0.500	100	25
ST-P2-GL-1.5000-XX-Y	1.500 → 0.750	100	25
ST-P2-GL-2.0000-XX-Y	2.000 → 1.000	100	25

Available in Black, Clear, White and Red for all sizes

For the “XX” value in the part number: specify **WH** - White; **BK** - Black; **RD** – Red; **CL** – Clear

For the “Y” value in the part number: specify “B” for Bulk Box or “S” for Small Box