


## FlangeStik™ Pressure Sensitive Adhesive Mounting Tape

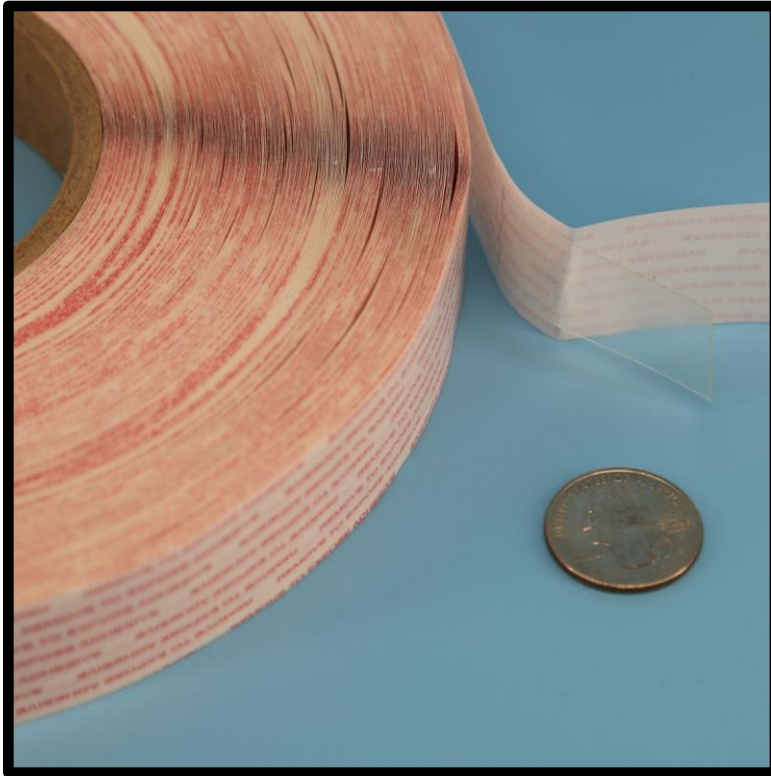

- 1" wide backing paper with 0.75" wide adhesive mounting tape PSA layer.
- Backing paper is white; PSA film is transparent.
- Adhesive is hot melt rubber based.
- Used for temporary mounting of tapes onto flanges, gasket channels or contact areas while permanent hardware is installed.
- Greatly assists in the installation of tapes and fabrics onto metal and non-metal surfaces.
- Roll lengths are 1600 and 100 feet.
- Total thickness is 0.0059". Liner is 0.0028" thick. Adhesive film is 0.0031" thick
- Service temperature is 32°F to 158°F. Should be applied at 50°F to 122°F.

FlangeStik™ Pressure Sensitive Mounting Tape		
Part Number	Adhesive	Roll Length
T-AD-PSA-TAPE-1600	Butyl rubber	1600 feet
T-AD-PSA-TAPE-100	Butyl rubber	100 feet