


Woven Fiberglass Gasket / Thermal Insulating Tape: *Premium Grade*
1200°F / 648°C: DeltaGlass™ Very High Temperature & Heat Resistant Plain &
Drop-Warp (Bolt-Hole / Ladder Tape™)

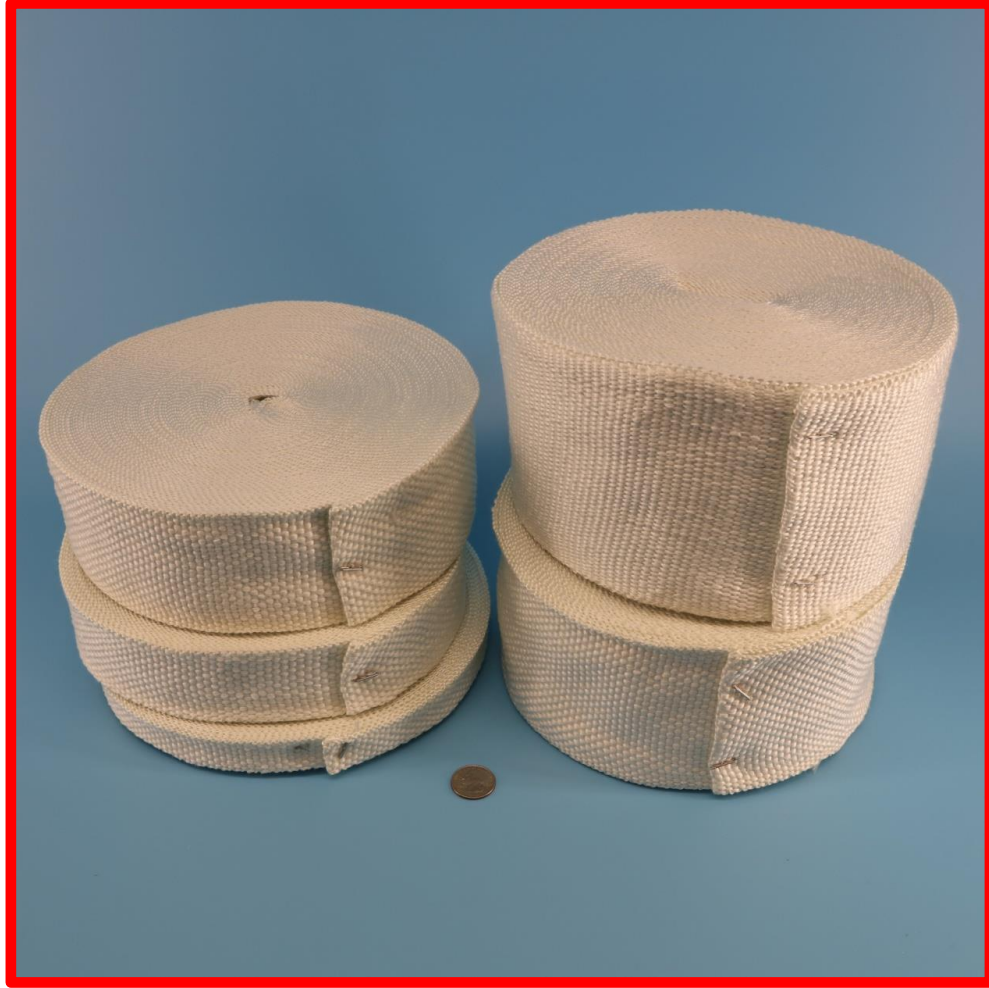

Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1200°F / 648°C in continuous service. 100% asbestos free, this tape is a bright white color.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc.

A Heat Treated version of these tapes is available – add “-HT” to the part number. Price for heat treating is \$6.00 per roll. Heat treated tapes are low smoke, dimensionally set and exceptionally clean of organic content. Tapes are also available with Pressure Sensitive Adhesive (PSA).


Fiber Type:	E Glass
Specific Gravity:	2.54-2.69
Breaking Tenacity:	1.71 gf/TEX. Std. 1.71 gf/TEX Wet
Tensile Strength:	450,000-500,000 psi.
Breaking Elongation:	4.81% Std. 4.81% Wet
Elastic Recovery:	100%
Average Stiffness:	2824.3 cn/TEX

Effect of Heat: Will not burn; Retains 75% tensile at 343°C; Softens at 732-877°C; Melts at 1121-1182°C.

Effect of Acids and Alkalis; Resistance to acids is fair. Good resistance to most alkalis.

Effect of Bleaches and Solvents: Unaffected.

Woven Fiberglass Gasket / Thermal Insulating Tape: *Premium Grade* (Continued)

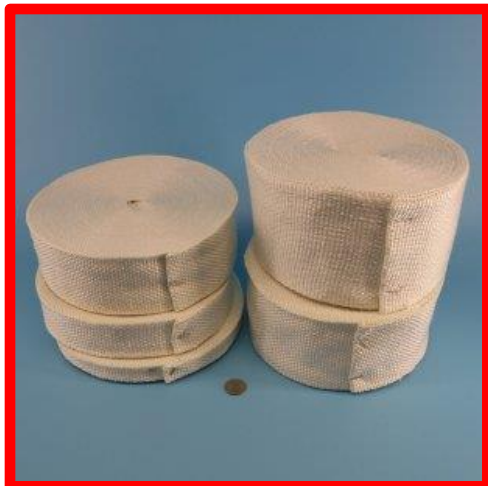

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Drop-Warp (Bolt-Hole / LadderTape™) - Premium Grade					
Part Number	Width in / mm		Nominal weight per roll		
			"A" thickness Weight (lb) / roll	"B" thickness Weight (lb) / roll	"C" thickness Weight (lb) / roll
T-FG-WOVEN-P-0.500-M013-X-Z**	.5	13	1.0	2.2	NA
T-FG-WOVEN-P-0.750-M019-X-Z**	.75	19	1.6	3.2	6.9
T-FG-WOVEN-P-1.000-M025-X-Z	1.0	25	2.1	4.2	9.8
T-FG-WOVEN-P-1.250-M032-X-Z	1.25	32	2.5	5.2	12.6
T-FG-WOVEN-P-1.500-M038-X-Z	1.5	38	3.0	6.2	14.6
T-FG-WOVEN-P-2.000-M051-X-Z	2.0	51	4.1	8.2	19.5
T-FG-WOVEN-P-2.500-M064-X-Z	2.5	64	5.1	10.2	24.4
T-FG-WOVEN-P-3.000-M076-X-Z	3.0	76	6.2	12.2	29.3
T-FG-WOVEN-P-3.500-M089-X-Z	3.5	89	7.3	14.2	34.2
T-FG-WOVEN-P-4.000-M102-X-Z	4.0	102	8.2	16.5	39.0
T-FG-WOVEN-P-4.500-M114-X-Z	4.5	114	9.2	18.5	44.0
T-FG-WOVEN-P-5.000-M127-X-Z	5.0	127	10.3	20.5	48.8
T-FG-WOVEN-P-5.500-M140-X-Z	5.5	140	11.3	22.5	53.7
T-FG-WOVEN-P-6.000-M152-X-Z	6.0	152	12.3	24.5	58.6

- For the "X" Value, specify A, B or C in part number to correspond to the desired thickness
A = 1/16" / .0625" / 1.59mm B = 1/8" / .125" / 3.18mm C = 1/4" / .250" / 6.35mm
- For the "Z" value in part number: use "-P" for Plain style tape or "-DW" for Drop Warp style tape.
Same price either version.
- Add "-HT" to the part number for heat treated version. Add \$6.00 to roll price for heat treating.
- All tapes are 100 foot / 30 metre lengths.
- Items with * may have higher minimum order quantities – please call.
- ** -08 / .5" / 13mm and -12 / .75" / 19mm width tapes are not available in Drop Warp
- Heat Treated / Heat Cleaned Available: low smoke – dimensionally set – exceptionally clean
- 0.50" wide tape is not available in 1/4" thickness.

Custom width tapes: Minimum 20 rolls or \$650 setup charge for lower quantities.

Woven Fiberglass Gasket / Thermal Insulating Tape:

Premium Grade with PSA Adhesive

1200°F / 648°C: DeltaGlass™ Very High Temperature & Heat Resistant Plain & Drop Warp (Bolt-Hole / Ladder Tape™) with Adhesive PSA



Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1200°F / 648°C in continuous service. 100% asbestos free, this tape is a bright white color.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc.

A Heat Treated version of this product is available – please enquire. Also available without Pressure Sensitive Adhesive (PSA) (see previous page in catalog).


Fiber Type:	E Glass
Specific Gravity:	2.54-2.69
Breaking Tenacity:	1.71 gf/TEX. Std. 1.71 gf/TEX Wet
Tensile Strength:	450,000-500,000 psi.
Breaking Elongation:	4.81% Std. 4.81% Wet
Elastic Recovery:	100%
Average Stiffness:	2824.3 cn/TEX

Effect of Heat: Will not burn; Retains 75% tensile at 343°C; Softens at 732-877°C; Melts at 1121-1182°C.

Effect of Acids and Alkalis; Resistance to acids is fair. Good resistance to most alkalis.

Effect of Bleaches and Solvents: Unaffected.

**Woven Fiberglass Gasket / Thermal Insulating Tape:
Premium Grade with PSA Adhesive (Continued)**

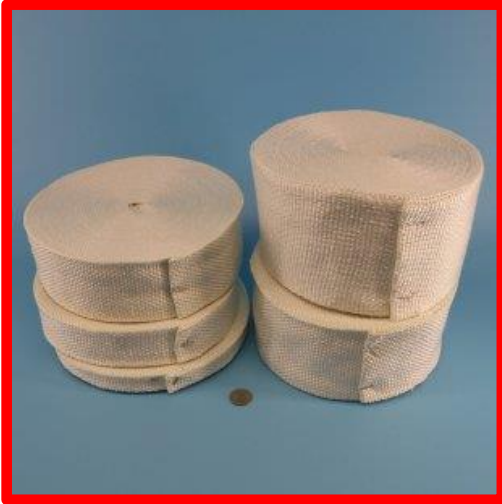

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Drop-Warp / Bolt-Hole / LadderTape™ Premium Grade with PSA Adhesive		
Part Number	Width in / mm	
T-FG-WOVEN-P-0.500-M013-X-Z-PSA**	.5	13
T-FG-WOVEN-P-0.750-M019-X-Z-PSA**	.75	19
T-FG-WOVEN-P-1.000-M025-X-Z-PSA	1.0	25
T-FG-WOVEN-P-1.250-M032-X-Z-PSA	1.25	32
T-FG-WOVEN-P-1.500-M038-X-Z-PSA	1.5	38
T-FG-WOVEN-P-2.000-M051-X-Z-PSA	2.0	51
T-FG-WOVEN-P-2.500-M064-X-Z-PSA	2.5	64
T-FG-WOVEN-P-3.000-M076-X-Z-PSA	3.0	76
T-FG-WOVEN-P-3.500-M089-X-Z-PSA	3.5	89
T-FG-WOVEN-P-4.000-M102-X-Z-PSA	4.0	102
T-FG-WOVEN-P-4.500-M114-X-Z-PSA	4.5	114
T-FG-WOVEN-P-5.000-M127-X-Z-PSA	5.0	127
T-FG-WOVEN-P-5.500-M140-X-Z-PSA	5.5	140
T-FG-WOVEN-P-6.000-M152-X-Z-PSA	6.0	152

- For the "X" Value, specify A, B or C in part number to correspond to the desired thickness
A = 1/16" / .0625" / 1.59mm B = 1/8" / .125" / 3.18mm C = 1/4" / .250" / 6.35mm
- For the "Z" value in part number: use "-P" for Plain style tape or "-DW" for Drop Warp style tape.
Same price either version.
- All tapes are 100 foot / 30 metre lengths.
- Items with * may have higher minimum order quantities – please call.
- ** -08 / .5" / 13mm and -12 / .75" / 19mm width tapes are not available in Drop Warp or 1/4" thickness
- Heat Treated / Heat Cleaned Available: low smoke – dimensionally set – exceptionally clean

Custom width tapes: Minimum 20 rolls or \$650 setup charge for lower quantities.

Fiberglass Woven Gasket & Thermal Insulating Tape: *Industrial Grade* 1200°F / 648°C: - Very High Temperature & Heat Resistant Plain & Drop-Warp (Bolt-Hole / Ladder Tape)



Manufactured of texturized fiberglass yarns, tape will withstand temperatures up to 1200°F / 648°C in continuous service.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc. This is also called a Ladder or Bolthole tape.

A Heat Treated version of this product is available.

Industrial grade tape has a lower bulk than Premium grade (the same size tape weighs more in Premium grade than Industrial grade as it has more fibreglass content). Available with and without Pressure Sensitive Adhesive (PSA).

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection


Very High Temperature & Heat Resistant Fiberglass Woven Plain & Bolt-Hole / Drop-Warp / LadderTape™ - Industrial Grade		
Part Number	Width in / mm	
T-FG-WOVEN-I-0.500-M013-X-Z**	.5	13
T-FG-WOVEN-I-0.750-M019-X-Z**	.75	19
T-FG-WOVEN-I-1.000-M025-X-Z	1.0	25
T-FG-WOVEN-I-1.250-M032-X-Z	1.25	32
T-FG-WOVEN-I-1.500-M038-X-Z	1.5	38
T-FG-WOVEN-I-2.000-M051-X-Z	2.0	51
T-FG-WOVEN-I-2.500-M064-X-Z	2.5	64
T-FG-WOVEN-I-3.000-M076-X-Z	3.0	76
T-FG-WOVEN-I-3.500-M089-X-Z	3.5	89
T-FG-WOVEN-I-4.000-M102-X-Z	4.0	102
T-FG-WOVEN-I-4.500-M114-X-Z	4.5	114
T-FG-WOVEN-I-5.000-M127-X-Z	5.0	127
T-FG-WOVEN-I-5.500-M140-X-Z	5.5	140
T-FG-WOVEN-I-6.000-M152-X-Z	6.0	152

- For the "X" value, specify "A" or "B" in part number to correspond to the desired thickness
A = 1/16" / .0625" / 1.59mm B = 1/8" / .125" / 3.18mm C = 1/4" / .250" / 6.35mm
- For "Z" value in part number: use "-P" for Plain style tape or "-DW" for Drop Warp style tape
Same price either version. Not all sizes available in drop warp style.
- All tapes are 100 foot / 30 metre lengths.
- Items with * may have higher minimum order quantities – please call.
- ** .5"/13mm and .75"/19mm width tapes are not available in Drop Warp

Fiberglass Woven Gasket & Thermal Insulating Tape:

Premium Grade / Special Thin

1200°F / 648°C: Very High Temperature & Heat Resistant Plain & Bolt-Hole / LadderTape™

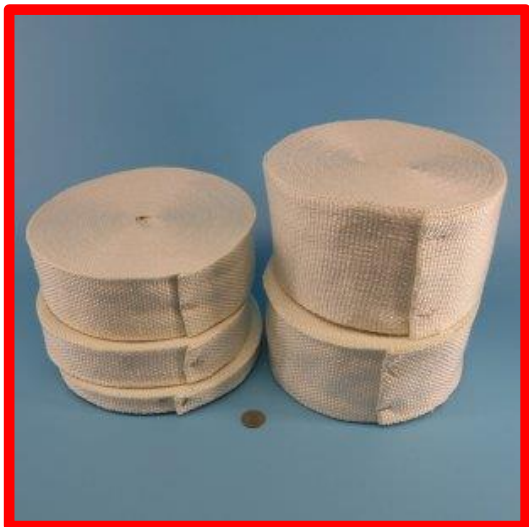

Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1200°F / 648°C in continuous service.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc.

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Bolt-Hole / Drop-Warp / LadderTape™ Premium Grade / Special Thin 1/32" / .0313" / 0.8mm Thickness

Part Number	Width in / mm	
T-FG-WOVEN-P-THIN-0.500-M013-X**	.5	13
T-FG-WOVEN-P-THIN-1.000-M025-X	1.0	25
T-FG-WOVEN-P-THIN-1.500-M038-X	1.5	38
T-FG-WOVEN-P-THIN-2.000-M051-X	2.0	51
T-FG-WOVEN-P-THIN-2.500-M064-X	2.5	64
T-FG-WOVEN-P-THIN-3.000-M076-X	3.0	76
T-FG-WOVEN-P-THIN-3.500-M089-X	3.5	89
T-FG-WOVEN-P-THIN-4.000-M102-X	4.0	102
T-FG-WOVEN-P-THIN-4.500-M114-X	4.5	114
T-FG-WOVEN-P-THIN-5.000-M127-X	5.0	127
T-FG-WOVEN-P-THIN-5.500-M140-X	5.5	140
T-FG-WOVEN-P-THIN-6.000-M152-X	6.0	152

- This tape is 1/32" / .0313" / 0.8mm thick
- For the "X" value in part number: use "-P" for Plain style tape or "-DW" for Drop Warp style tape. Same price either style.
- Add "-HT" to the part number for heat treated version. Add \$6.00 to roll price for heat treating.
- Add "-PSA" to the part number for tape with PSA coating.
- All tapes are 100 foot / 30 metre lengths.
- ** -08 / .5" / 13mm width tapes are not available in Drop Warp