


Polamco 100P323 Equivalent Silicone Rubber Self Fusing Electrical Insulating Tape

Operating temperature: -65°F to +500°F / -54°C to 260°C; Brittle temperature -85°F / -65°C

Meets MIL-I-22444 & Many OEM Specifications

Self Binding Self-Fusing Tape - High Temperature, Heat & Flame Resistant

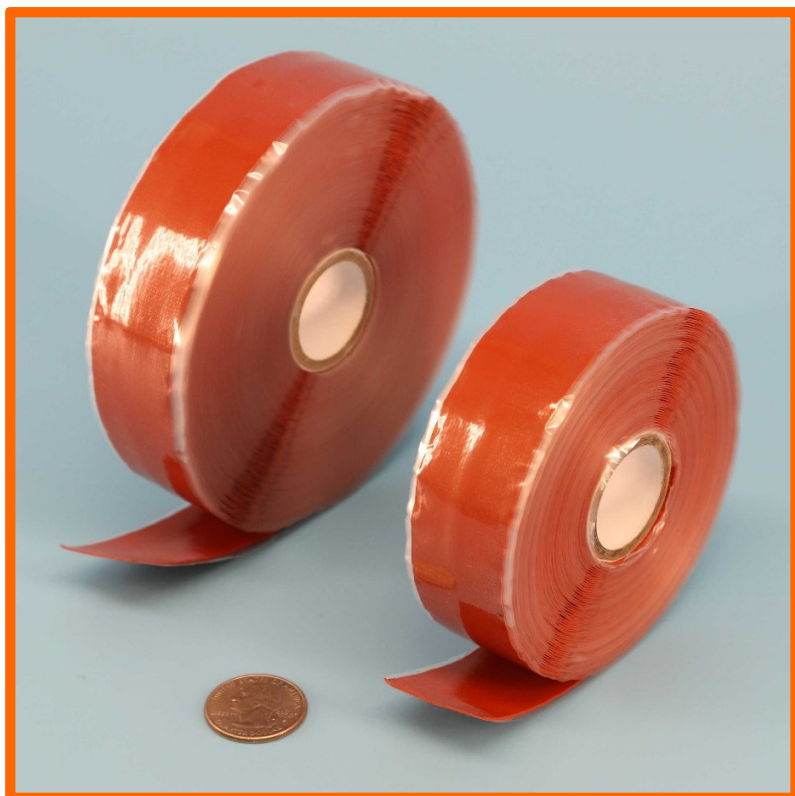

- Self-bonds / self fuses / self amalgamating. No sticky residue or adhesive when removed. Starts fusing within minutes, fully bonded within hours. Excellent cold temperature performance. Makes an excellent compression tape.
- Excellent for sealing ends of firesleeve: prevents sleeve from absorbing contamination and wicking liquids. Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening. Secures insulation to hot air ducting.
- CofC available.
- Rolls are 12 or 20 yards long.
- This tape meets: DMS 2186, Type 1 & MIL-I-22444 specifications

Polamco 100P323 Equivalent Silicone Rubber Self Fusing Electrical Insulating Tape	
Supported Tape – With Fiberglass Substrate	
Part Number	Roll Length
T-SR-100P323-20Y-16-OR	20 yards
T-SR-100P323-12Y-16-OR	12 yards

- Color is Oxide-red
- 1" / 25 mm wide
- 0.020" / 0.51mm thick

Amalgamating time: At 120°C; 120 minutes / at 150°C; 35 minutes / at 200°C; 20 minutes / at 250°C; 15 minutes

All trademarks and tradenames are property of their respective owners