


## 20 PLYSIL® (3455) Equivalent Silicone Rubber Tape

**Silicone Rubber Self Adhering Electrical Insulating Tape – Meets MIL-I-46852A**  
**356°F / 180°C: Self Binding / Self-Fusing / Self Amalgamating Tape -**  
**High Temperature, Heat & Flame Resistant**

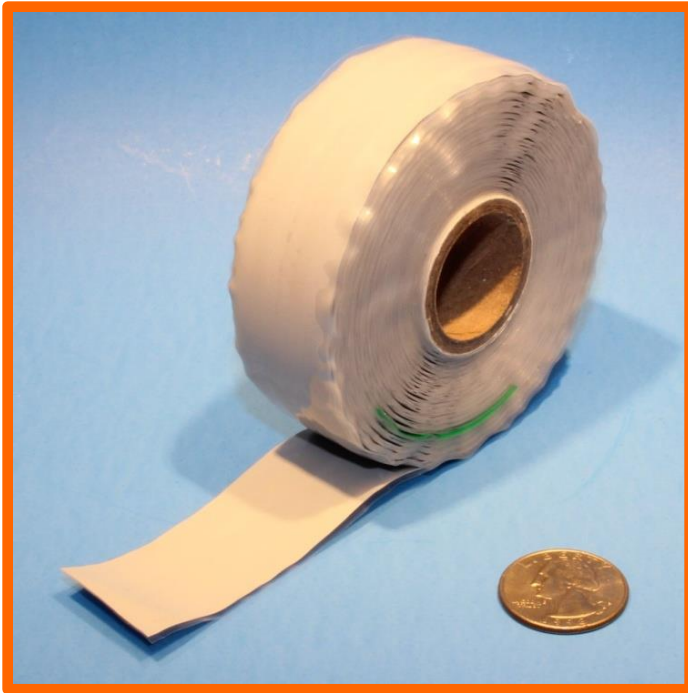

- Self-bonds / self fuses / self amalgamating tape. No residue when removed. Starts fusing within minutes; fully bonded within hours. Excellent cold temperature performance. Low water absorption.
- Tested to:
  - ASTM D 149; provides minimum 400 V/mil.
  - ASTM D 412; provides minimum 700 psi tensile strength and minimum 300% elongation.
  - ASTM D 2240; Durometer (Shore A); 55. Other test data available.
- Excellent for sealing ends of firesleeve: prevents sleeve from absorbing contamination and wicking liquids. Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening. Primary insulation for applications up to 180°C / 356°F.
- Meets Mil-I-46852 specifications. Certificate of Conformity available.
- 24 month shelf life from DOM.
- Amalgamating time: Room temperature; 24 hours / at 120°C; 120 minutes / at 150°C; 35 minutes / at 200°C; 20 minutes / at 250°C; 15 minutes.
- Type II triangular profile.

20 PLYSIL® 3455 Equivalent Silicone Rubber Tape High Temperature Silicone Rubber Self Fusing Electrical Tape		
Part Number	Tape Width	Tape Thickness
T-SR-20-3455	1"	.020"

- Standard roll length is 36 feet / 12 Yards / 10.9 Metres

PLYSIL® is a registered trademark of Plymouth Rubber Europa S.A.