


**3M™ Scotch® 70 & 70HDT Equivalent Silicone Rubber Electrical Tape**  
**356°F / 180°C: FlameShield™ Meets A-A-59163 & Many Other OEM Specifications**  
**Self Binding Self-Fusing Tape - High Temperature, Heat & Flame Resistant**

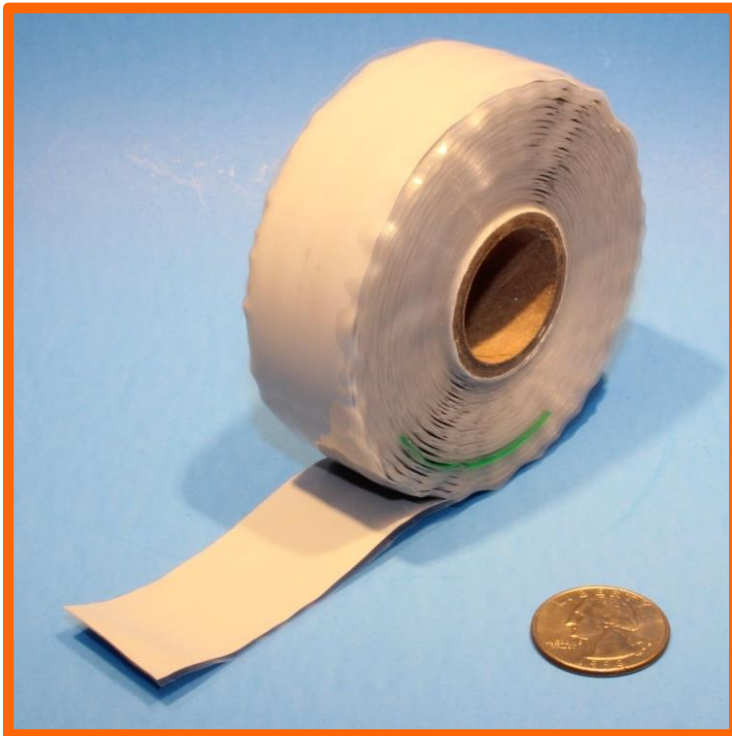

- Self-bonds / self fuses / self amalgamating. No sticky residue or adhesive when removed. Starts fusing within minutes, fully bonded within hours. Excellent cold weather performance. Makes an excellent compression tape.
- Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening.
- Meets A-A-59163 specifications. CofC available.
- Arc and Track Resistant.
- RoHS compliant.
- Roll length is 30 feet.
- Available as NSN 5970-01-592-3238 & 5970-01-276-5277

FlameShield™ High Temperature Silicone Self Fusing Compression/Stretch Tape Equivalent to 3M™ Scotch® 70 & 70HDT Meets A-A-59163 Specifications				
Part Number	Tape Width Inches / mm	Thickness inches / mm	Profile	Color
T-SR-3M70	1 / 25	0.012 / 0.30	Rectangular	Blue-Grey
T-SR-3M70HDT	1 / 25	0.020 / 0.51	Triangular	Blue-Grey

**Quantity discounts available – 24 rolls per case**

**Please enquire for pricing on sizes other than those listed above.**

**This tape can be made in thicknesses from 0.010” to 0.080” and in various widths.**

- Add \$6.00 for individual roll CofC. Lot/Batch CofC \$10.00 per order line item

3M70: 3M ID 80611438617 UPC# 00051128572610  
 3M70HDT: 3M ID 80611438625 UPC# 00051128572627

Triangular tapes have a center guideline stripe to assist in making 50% overwraps. The triangular profile version tape allows for minimal ridge lines, providing splices and joints with an almost totally smooth surface (prevents snagging when splice pulled through obstructions).

Scotch® is a registered trademark of the 3M company