




**Lockheed Martin Space Systems 5-00857 & 5-00615 Silicone Tape**  
**500°F / 260°C: FlameShield™ Silicone Rubber Self Fusing Compression & Stretch**  
**Electrical Insulating Tape**  
**Self Binding Self-Fusing Tape - High Temperature, Heat & Flame Resistant**

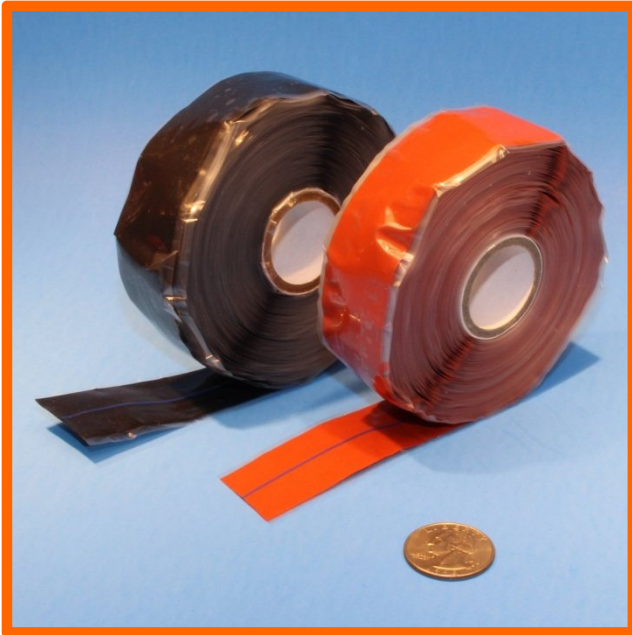

- Meets Lockheed-Martin 5-00857 & 5-00615 specifications.
- Self-bonds / self fuses / self amalgamating. No sticky residue or adhesive when removed. Starts fusing upon contact, fully bonded within hours. Excellent cold weather performance. Makes an excellent compression tape.
- Excellent for sealing ends of firesleeve: prevents sleeve from absorbing contamination and wicking liquids. Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening.
- Meets MIL-I-22444, Mil-I-46852 and/or AA59163 and other proprietary specifications.
- CofC available.

<b>FlameShield™ High Temperature Silicone Rubber Self Fusing Compression/Stretch Tape Meets Lockheed Martin Space Systems 5-00857 &amp; 5-00615 Specifications</b>			
<b>Part Number</b>	<b>Tape Width Inches / mm</b>	<b>Tape Thickness inches / mm</b>	<b>Price Per Roll</b>
<b>Specification 5-00857</b>			
T-SR-5-00857-S-ZZ	As per specification	As per specification	\$ 67.29
<b>Specification 5-00615</b>			
T-SR-5-00615	As per specification	As per specification	\$ 34.71

- Standard roll length is 36 feet / 12 Yards / 10.9 Metres; other lengths available.
- For the ZZ value (color code): OR = Oxide-Red, BK = Black

These tapes are guaranteed to meet specification for 1 year from date of manufacture providing tapes are stored dry at 21°C +/- 3°C or 70°F +/- 5°F. Standard tapes have an interleaved liner of polyethylene. Polyester liner available.