


General Electric Transportation Systems EMD 8355873

Silicone Rubber Tape

500°F / 260°C: FlameShield™ Silicone Rubber Self Fusing Compression & Stretch Electrical Insulating Tape

Self Binding Self-Fusing Tape - High Temperature, Heat & Flame Resistant

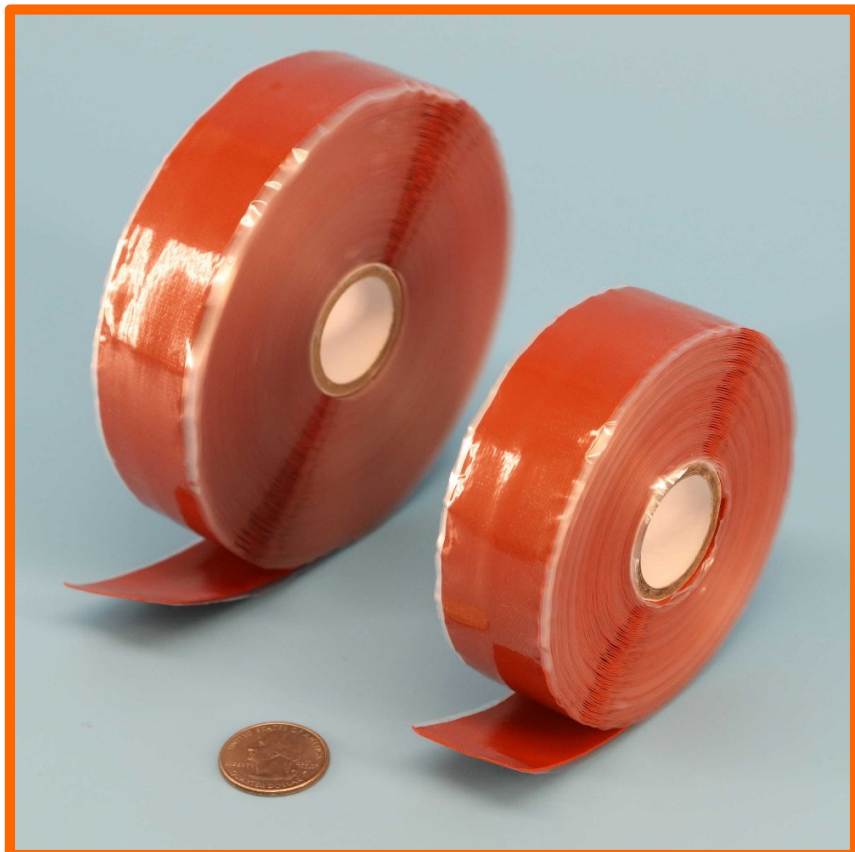

- Self-bonds / self fuses / self amalgamating. No sticky residue or adhesive when removed. Starts fusing within minutes, fully bonded within hours. Excellent cold weather performance. Makes an excellent compression tape.
- Excellent for sealing ends of firesleeve: prevents sleeve from absorbing contamination and wicking liquids. Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening.
- Meets Mil-I-22444 and other proprietary specifications. This is a supported glass reinforced tape.
- CofC available.

FlameShield™ General Electric Transportation Systems Standard EMD 8355873 – Junction Insulation Tape High Temperature Silicone Rubber Self Fusing Compression/Stretch Tape			
Part Number	Tape Width Inches / mm	Tape Thickness Inches / mm	Price Per Roll
T-SR-EMD-8355873-OR-S25-16-20-12Y	1 / 25	0.020 / 0.51	\$ 67.29
T-SR-EMD-8355873-OR-S25-16-20-20Y	1 / 25	0.020 / 0.51	\$ 112.14

- Roll length of 12 yards (12Y in part number) or 20 yards (20Y in part number)
- Tapes are Oxide-Red color

These tapes are guaranteed to meet specification for 1 year from date of manufacture providing tapes are stored dry at 21°C +/- 3°C or 70°F +/- 5°F. Standard tapes have an interleaved liner of polyethylene. Polyester liner available.