


Boeing HS5215E (103 & 203)

NSN 5330-01-479-4233 / 5330-01-479-4235 Silicone Rubber Tape

Operating temperature: -65°F to +500°F / -54°C to 260°C; Brittle temperature -85°F / -65°C

FlameShield™ Silicone Rubber Self Fusing Compression & Stretch Electrical Insulating Tape

Self Binding Self-Fusing Tape - High Temperature, Heat & Flame Resistant

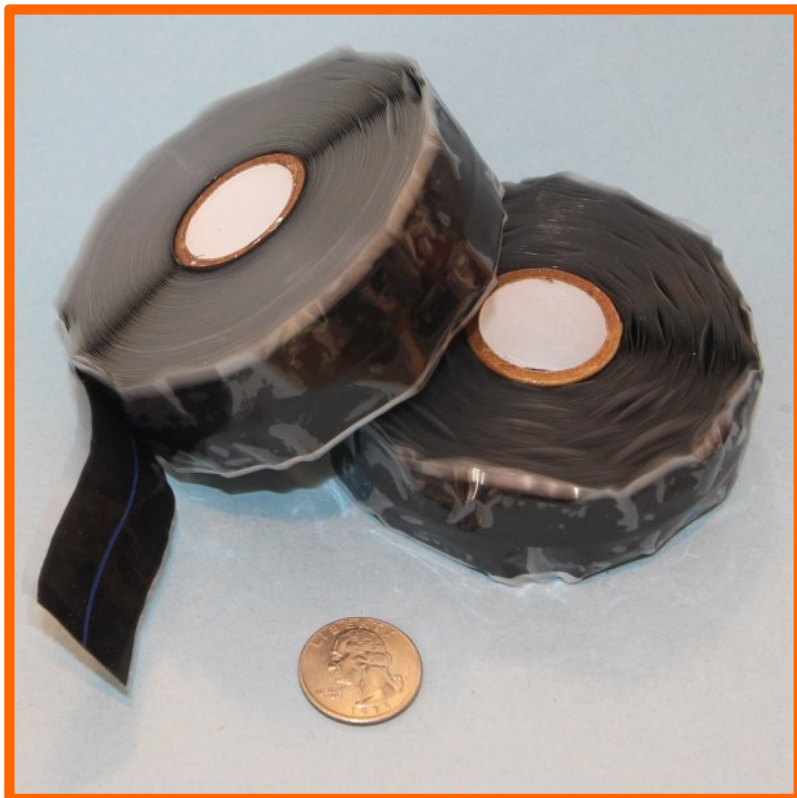

- Meets HS5215E specifications.
- Self-bonds / self fuses / self amalgamating. No sticky residue or adhesive when removed. Starts fusing upon contact, fully bonded within hours. Excellent cold weather performance. Makes an excellent compression tape.
- Excellent for sealing ends of firesleeve: prevents sleeve from absorbing contamination and wicking liquids. Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening. Used as a backshell clamp bushing tape.
- Meets Mil-I-46852 and other proprietary specifications.
- CofC available.

**FlameShield™ High Temperature Silicone Rubber Self Fusing
Compression/Stretch Electrical Insulating Tape
Meets HS5215E103 Specifications**

Part Number	Tape Width Inches / mm	Tape Thickness
T-SR-HS5215E103	Per specification	Per specification
T-SR-HS5215E203	Per specification	Per specification

- Standard roll length is 36 feet / 12 Yards / 10.9 Metres; other lengths available.
- This tape is Black per the specification.

These tapes are guaranteed to meet specification for 1 year from date of manufacture providing tapes are stored dry at 21°C +/- 3°C or 70°F +/- 5°F. Standard tapes have an interleaved liner of polyethylene. Polyester liner available.