

Custom Fabrications & Fabrication Supplies

Portable Equipment Lithium-Ion Battery Fire Containment Bags - meets FAA & EASA standards	7-1
Pallet Cargo Fire Containment Cover - FAA TSO-C203 Approved	7-3
Welding Blankets & Curtains	7-5
Plumbing / Grinding / Light Welding Protection Pads	7-8
High Temperature & Heat Resistant Kneeling Pads	7-9
Annealing Pads for Glass and Metal Processing	7-10
Removable Blanket & Insulation Systems for Engine & Generator Exhaust Components	7-11
Removable Blanket & Insulation System Example Pricing	7-13
Standard Blanket Sets	7-15
Caterpillar Engines	7-15
Cummins Engines	7-16
Daewoo Engines	7-16
Daimler Chrysler Engines	7-17
Detroit Diesel Engines	7-17
Deutz Diesel Engines	7-18
EMD Electro-Motive Diesel Engines	7-18
Ford Engines	7-18
GM General Motors Engines	7-18
Hercules Engines	7-15
Isuzu Engines	7-15
Iveco Engines	7-15
John Deere Engines	7-15
Kubota Engines	7-16
Lister Petter Engines	7-16
Lombardini Engines	7-16
Mercedes Engines	7-16
Merlin Engines	7-16
Mitsubishi Engines	7-17
Nissan Engines	7-17
Onan Cummins Engines	7-17
Perkins Engines	7-18
Pielstick Engines	7-18
Spectrum Engines	7-18
Stork Engines	7-19
Superior Engines	7-19
VM Motori Engines	7-19
Volvo Engines	7-19
Wartsila Engines	7-19
Waukesha Engines	7-19
Yanmar Engines	7-19
Standard Genset Blanket Sets	7-20
Caterpillar Gensets	7-20
Generac Gensets	7-20
Kohler Gensets	7-21

High Temperature, Heat, Flame, Fire, Molten Metal & Weld Splatter Protection Materials

Fax Orders: 610-340-9054

Telephone Orders: 610-906-3549

orders@abthermal.com

Kubota Gensets	7-22
Olympian Gensets	7-22
Standard Selective Catalytic Reduction Units	7-23
Steuler	7-23
CAT	7-23
Cummins	7-23
Siemens	7-23
Argillon	7-23
Standard Agricultural, Construction, Mining, Logging Vehicle Engine Blanket Sets	7-24
Atlas Copco	7-24
BTI	7-24
Case	7-24
Caterpillar CAT	7-24
Cubex	7-25
Dodge	7-25
Getman	7-25
Jarvis Clarke	7-25
John Deere	7-25
Komatsu	7-25
MACK	7-26
Maclean	7-26
Marcotte	7-26
Miller	7-26
Mine Jack	7-26
Mixmaster	7-26
MTI	7-26
New Holland	7-27
Norment	7-27
Omega	7-27
REG	7-27
Robbins Rasiebores	7-27
Tamrock	7-27
Toro	7-27
Volvo	7-27
Wagner	7-27
Wajax	7-28

Quote Request Forms for Engine Component Insulation Blankets	7-29
Fire Protection Removable Blanket and Shield Insulation Systems for Mine Equipment	7-34
Removable Insulation Covers for Industrial / Marine Valves & Piping	7-35
Blow-out / Spray Protection Shields for Valves & Pipe Flanges	7-36
Steel and Metal Processing Plant Custom Fabrications	7-37
Heated Removable Insulation Covers for Gas Cylinders	7-38
Heated Removable Insulation Covers and Heating Pads for Industrial Bulk Container Tote Tanks	7-39
55 & 30 Gallon Drum Insulated Covers & Covers with Heaters	7-40
Silicone Rubber Pipe & Hose Heating Tape with Fixed Thermostat	7-41
Silicone Rubber Pipe & Hose Heating Tape with Adjustable Thermostat	7-42
ECOtherm Blanket	7-43
Robotic Covers	7-44
Steam Trap Jackets	7-45
Conveyor Belting	7-46
High Temperature Heat Resistant Threads	7-47
Hook & Loop Closure Fasteners	7-51
High Temperature Zippers	7-55
Scissors / Shears / Cutters	7-56
Stainless Steel Snaps	7-57
Commercial Kitchen Duct Sealant, Gaskets & Access Doors	7-58

High Temperature, Heat, Flame, Fire, Molten Metal & Weld Splatter Protection Materials

Fax Orders: 610-340-9054 Telephone Orders: 610-906-3549 orders@abthermal.com

ThermaCover™ Portable Equipment Lithium-Ion Battery Fire Containment Bags - meets FAA & EASA standards



- Designed for Laptops, Notebooks, Tablets, Cellphones, Portable Game Devices and other objects powered by Lithium-ion batteries.
- Will not burn, melt or allow flame penetration.
- Resists molten metal burn through.
- Withstands temperatures up to 1800°F / 980°C.
- Kit includes the bag, high temperature gloves and a fireblanket.
- The bag is available in tote or envelope style.
- Tote dimensions are 24" x 13" x 5". Envelope dimensions are 16" x 18" and 18" x 24".
- Both styles feature a multi-layer design of fire resistant fabric and aluminum foil coated fabric to ensure heat and fire remain contained.
- The gloves feature a leather palm and aluminized backing to provide protection and flexible grip with maximum dexterity.
- The fireblanket is designed to knock down flames before the handler grasps the burning device.
- Meets or exceeds the following standards:
 - FAR 25 Appendix F Part 1 (Horizontal Rate of Burning)
 - FAR 25 Appendix F Part III (Flame Penetration Resistance)
 - FAR 25 Appendix F Part IV (Heat Release Rate)
 - FAR 25 Appendix F Part V (Smoke Density)
 - ASTM D6413 (Vertical Flame Resistance)
 - ASTM E-84 (Surface Flame Spread and Smoke Density)
 - ASTM F-955 (Molten Metal Resistance)
 - ASTM E-119 (Furnace Tested)
 - UL 1784 (Smoke Penetration)
 - BSS 7239 (Non-Toxicity of Products of Combustion)

Portable Equipment Lithium-Ion Battery Fire Containment Bags (Continued)

Exceeds fire suppression standards set by FAA, EASA



ThermaCover™ Fire Containment Bags for Lithium-ion Battery Powered Portable Equipment	
Part Number	Size inch / cm
FAB-FCB-16X18	16" x 18" / 40.6 x 45.7
FAB-FCB-18X24	18" x 24" / 45.7 x 60.9
FAB-FCB-TOTE	24" x 13" x 5" / 61 x 33 x 13

PalletGard™ Pallet Cargo Fire Containment Cover

TSO-C203 FAA Approved



- Designed to isolate a pallet fire for 6 hours - providing valuable time to land safely.
- Exceeds the performance standards set by the FAA and EASA.
- Lightweight, durable, easy to deploy and maintain.
- Features a cross shaped design with overlapping corners for ease of use with irregular loads.
- Provides extended protection from extreme heat and flames caused by fuel sources such as lithium-ion batteries and hazardous cargo.
- Designed to be used with a standard TSO-C90 cargo net.
- Locking net connectors.
- Used for aviation, marine, land transport and storage in hangars, and other structures.
- Will not burn, melt or allow flame penetration.
- Resists molten metal burn through.
- Withstands temperatures up to 1800°F / 980°C.
- 3 standard sizes and custom sizes available.
- Also useable to prevent fire from damaging the pallet contents for valuable equipment, and currency.
- Meets or exceeds the following standards:
 - TSO-C203 (FAA Fire Containment Cover Certification)
 - ISO 14186 / SAE AS 6453 (Full Scale Box Burn)
 - ISO 12236 (Static Puncture Test)
 - FAR 25 Appendix F Part III (Flame Penetration Resistance)
 - FAR 25 Appendix F Part IV (Heat Release Rate)
 - FAR 25 Appendix F Part V (Smoke Density)
 - ASTM D6413 (Vertical Flame Resistance)
 - ASTM E-84 (Surface Flame Spread and Smoke Density)
 - ASTM F-955 (Molten Metal Resistance)
 - ASTM E-119 (Furnace Tested)
 - UL 1784 (Smoke Penetration)
 - BSS 7239 (Non-Toxicity of Products of Combustion)

PalletGard™ Pallet Fire Containment Cover

TSO-C203 FAA Approval



PalletGard™ Pallet Fire Containment Cover - TSO-C203	
Part Number	Size inch / cm
FAB-PFCC-126X98X118	126" x 98" x 118" / 320 x 249 x 299
FAB-PFCC-126X98X96	126" x 96" x 96" / 320 x 249 x 244
FAB-PFCC-126X98X64	126" x 98" x 64" / 320 x 249 x 162

Custom sizes are available but do not meet TSO.

Custom sizes meeting TSO will incur testing costs.



Welding Splatter and Spark Protection Blankets & Curtains

Light Duty - Medium Duty - Heavy Duty

Industrial hot work welding and cutting continues to be one of the leading cause of fires and explosions. AB Tech's FlameShield™ FM tested, approved and certified blanket and curtain materials and products protects property, equipment and people from the inadvertant ignition of combustibles.

FlameShield™ products meet the specific requirements as set by FM, and provide superior protection to products that have no certification.

FM's Follow-Up Audits ensures that the ongoing performance of AB Tech's fire resistance products are consistently uniform, durable and reliable.

AB Tech's welding protection products range from cost effective lightweight curtain materials for containment of sparks and arc-flash to heavy duty, long-service fabrics to shield against molten slag. Our welding materials are made of incombustible fiberglass, silica and aramid cloth and are available uncoated or with a specially formulated treatments to resist water, oil, harsh chemicals, fire and abrasion. They are flexible, drapable, easy to cut and stitch for the widest possible applications.

FlameShield™ welding blankets and welding curtains have been evaluated on their ability to:

- Prevent burn through the material and provide adequate protection for adjacent combustible from possible sources of ignition;
- Limit temperature transmission through the material to a degree that will prevent ignition to underlying combustibles;
- Resist melting, dripping or deformation so as to prevent sparks from spreading outside of confined and protected areas;
- Maintain their flexibility, durability and structural integrity when charred areas are subject to 90 degree bends;
- Maintain their fire and temperature rise resistance properties when subjected to accelerated weathering tests intended to stimulate exposure to light and water (ultra violet [uv] and condensation, respectively) conditions.

These blankets and curtains may be draped over equipment or cabling/hoses to protect against welding and grinding operations, or may be hung as a curtain to protect an area. May also be hung as a canopy or false ceiling to provide shielding from hot process piping or overhead repairs and fabrication work.

A variety of fabrics are available: Fiberglass and Silica based - plain, and with coatings.

Lower cost lightweight fiberglass materials, with simple acrylic, neoprene and silicone coatings can be utilized for light duty applications in a vertical installation - where weld splatter and sparks hit the fabric and then fall to the floor or ground - the coatings only need to protect the fabric material briefly during the short contact cycle.

For medium duty applications - heavier weight fiberglass fabrics with thicker and heavier coatings provide good burn through protection in a lower cost and lighter material than the heavy duty protection materials.

For heavy duty applications involving large amounts of splatter and sparks, and repeated contact in a concentrated area, the heaviest fiberglass and heaviest coating materials provide long life. For the ultimate in burn-through protection, and for horizontal placement where the splatter can rest or accumulate on the blanket, silica fabrics are preferred due to the excellent burn-through protection they provide.

We can fabricate custom blankets, curtains and shields for your specific application, with a variety of attachment and extension options.

Welding Splatter and Spark Protection Blankets & Curtains

Light Duty - Medium Duty - Heavy Duty

Welding Blankets / Curtains	
Using FlameShield FCB 1000°F / 537°C Fabric	
Part Number	Size feet / metres
FAB-WBC-46-FB	4 x 6 / 1.2 x 1.8
FAB-WBC-66-FB	6 x 6 / 1.8 x 1.8
FAB-WBC-88-FB	8 x 8 / 2.4 x 2.4
FAB-WBC-810-FB	8 x 10 / 2.4 x 3.0
FAB-WBC-1010-FB	10 x 10 / 3.0 x 3.0
FAB-WBC-1015-FB	10 x 15 / 3.0 x 4.5

Using FlameShield FCBHT (pre-shrunk) 1000°F / 537°C Fabric	
FAB-WBC-66-FBHT	6 x 6 / 1.8 x 1.8
FAB-WBC-88-FBHT	8 x 8 / 2.4 x 2.4
FAB-WBC-810-FBHT	8 x 10 / 2.4 x 3.0
FAB-WBC-1010-FBHT	10 x 10 / 3.0 x 3.0
FAB-WBC-1015-FBHT	10 x 15 / 3.0 x 4.5

Using InSilMax ISCB 1800°F / 982°C Fabric	
FAB-WBC-66-ETB90	6 x 6 / 1.8 x 1.8
FAB-WBC-88-ETB90	8 x 8 / 2.4 x 2.4
FAB-WBC-810-ETB90	8 x 10 / 2.4 x 3.0
FAB-WBC-1010-ETB90	10 x 10 / 3.0 x 3.0
FAB-WBC-1015-ETB90	10 x 15 / 3.0 x 4.5

- Meets NFPA 701 / CPAI-84
- All Welding Blankets / Curtains are fabricated from a single layer of material.
- All outside edges are serged / overlocked to prevent fraying.
- Folded / stitched edges are available at extra charge.
- ½" Grommets are available at \$8.00 each, at any spacing desired.

For Custom Sizes Please Enquire

Plumbing / Grinding / Welding Protection Pads

1800°F / 982°C InSilMax™ Fabric



These mini pads are fabricated from Extreme High Temperature InSilMax™ Cloth, with serged / overlocked edges to prevent fraying, and with one edge folded and sewn and also grommeted at two corners.

Can be hung or tacked behind welding, grinding or soldering work to protect walls, wiring, hoses, etc. from being damaged during maintenance or fabrication work.

Also used as annealing pads in tempering ovens for metal fabrications.

These pads pay for themselves very quickly by preventing costly damage that could have been easily avoided.

InSilMax™ Silica Cloth Plumber / Welder Pads	
Part Number	Size - Thickness inches
FAB-WPI-810-090	8" x 10" / .090"
FAB-WPI-810-054	8" x 10" / .054"
FAB-WPI-1012-090	10" x 12" / .090"
FAB-WPI-1012-054	10" x 12" / .054"

High Temperature & Heat Resistant Kneeling Pads

1800°F / 982°C InSilMax™



These kneeling pads are fabricated from Extreme High Temperature InSilMax™ Cloth, with Extreme High Temperature Silica Insulation sandwiched between the layers.

Very popular in steel plants, boiler industry, and can be used anywhere that a pad is required for personnel comfort and safety that will not burn and will withstand welding slag, grinding, torch flame and other hazards.

Three standard sizes are available or custom made to any size.

InSilMax™ ThermalShield Kneeling Pad	
Part Number	Size
FAB-KPI-1818	18" x 18"
FAB-KPI-2424	24" x 24"
FAB-KPI-3636	36" x 36"

Annealing Pads for Glass and Metal Processing

1800°F / 982°C InSilMax™ Fabric



Annealing pads are fabricated to your custom size requirement.

For maximum life, the edges are serged/overlocked or folded and stitched.

Please contact us with dimensions required.

Removable Blanket and Insulation Systems for Engine & Generator Exhaust Components – UL2200 Qualifyable

1200°F / 648°C

Diesel, Gasoline/Petrol and Natural Gas Piston and Gas Turbine Engines

Suitable for Land, Marine and Mobile Equipment – Insulating Blankets for Mufflers, Silencers, Turbo Chargers, Elbows, Flex Pipes, Straight Pipes and Flanges



- Removable blankets protect personnel from contact burns.
- Helps maintain exhaust temperature for better exhaust flow.
- Helps to keep engine/generator room, compartment or enclosure cooler.
- Silicone Rubber coated outer fabric meets Mil-I-24244 for corrosion and chloride requirements.
- Needled fiberglass insulation layer meets Mil-I-16411 (Type II), ASTM-C-1086-96 & USCG 164.009 for incombustible materials and MIL-I-24244 for corrosion and chloride requirements.
- Assembled with PTFE coated fiberglass thread meeting C-20079H, Type III, Class 3.
- Hot side is 304 Stainless Steel mesh. Other grades and Inconel available.
- Completed blankets allow installations to meet UL2200 with proper installation.

- Suitable for gasoline & diesel reciprocating engines. Higher temperature version available for gas turbine engines.
- Removable blanket sections are assembled with either locking wire or spring clips connecting the mushroom rivets or hook fasteners that are mounted on the blankets. (mushroom rivets visible on example at left.). Custom made to form fit components.
- The insulation is a DeltaGlass™ needed fiberglass or ceramic felt. Most blankets are 1" thick but can be thinner or thicker to accommodate particular thermal or dimensional requirements.
- Cold side cover fabric is typically a 2 side silicone rubber coated FlameShield™ fiberglass (silver/gray is standard, red and black available). Optionally a silicone rubber / aluminum film Dual-Coat™ coated fabric can be used or a one side coated AluMax™ aluminum film fabric.



For higher temperature operation on gas turbine engines; 1) the stainless knitted mesh is replaced with inconel mesh; 2) the needed DeltaGlass™ is replaced with needed InSilMax™; 3) the cold side fabric may be replaced with an InSilMax™ fabric.

Closure of the blankets is accomplished with stainless lock wire connecting the mushroom cap rivets. Other closure systems are available, such as spring, straps with high temperature hook and loop closure, turnbuckles or straps with D rings.

Laser etched data plates are affixed to each blanket section, identifying your order number and the component, allowing for easy installation and future replacement if necessary.

See our web site for many examples of installations and for forms to record your equipment dimensions to email or fax to us for a quote.

Can I touch it? - Insulation surface temperatures

We are often asked how hot the outer surface of an insulation blanket gets, and whether it is touch-safe.

To properly answer this question, it is important to remember that metals conduct heat; fabrics do not. This means that a fabric surface can be "hotter" temperature-wise than a metal surface and still be touch-safe. However, until 1998, there was no formal differentiation made between metal and other types of surfaces. For both, 140°F [60°C] was the accepted standard.

The UL2200 Specification for Stationary Engine Generator Assemblies, issued in September 1998, was the first authority to actually quantify acceptable temperatures.

UL2200 Specification for Stationary Engine Generator Assemblies

Contact Surface	Metallic	Nonmetallic
Handles or knobs grasped for holding	50° C (122° F)	60° C (140° F)
Handles or knobs that are contacted but do not involve holding; other surfaces subject to contact and user maintenance	60° C (140° F)	85° C (185° F)
Surfaces subject to casual contact	70° C (158° F)	95° C (203° F)

As you can see from the above table, non-metallic surfaces, such as standard insulation blankets, can reach temperatures as high as 95° C (203° F) and still be considered safe for casual contact.

Although space considerations will sometimes limit the thickness of an insulation blanket, and thus allow for a higher than desired outer surface temperature, in general, all our industrial insulation blankets are designed to be touch-safe.

Removeable Blanket Lacing Twist Pliers & Stainless Wire



Twist Pliers

Lacing wire can be installed and twisted with standard hand tools, but twist pliers make the job easy.

For just one or a small number of installations the small 6" plier is fine. As a standard tool set for many installations, its handy to have both sizes.

Stainless lacing / safety wire

1 pound spool of .032" stainless steel lacing / safety wire.

Lacing & Safety Wire Twist Pliers & Stainless Lacing Wire	
FAB-PLIERS-6	6" pliers
FAB-PLIERS-9	9" pliers
FAB-PLIERS-SET	6" and 9" plier set
FAB-WIRE-032	.032" 1 pound spool of 302/304 stainless lacing wire

Removable Blanket and Insulation Systems for Engine & Generator Exhaust Components – UL2200 1200°F / 648°C

Diesel, Gasoline/Petrol and Natural Gas Piston and Gas Turbine Engines

Standard engine insulation blanket sets for the following engine makes and models are available (The Part Number is the ordering code for the complete set for that engine.)

Please enquire for models not listed: we can custom fabricate for any engine configuration.

Caterpillar Engine Removable Blankets

• Caterpillar Model 3054C Down Outlet (same as Perkins 1104C-44T)	(P/N: FAB-EBS-CAT-104Z)
• Caterpillar Model 3054C Forward Outlet (same as Perkins 1104C-44T)	(P/N: FAB-EBS-CAT-108Z)
• Caterpillar Model 3054T: 56-76Kw	(P/N: FAB-EBS-CAT-0PKT65-04Z0)
• Caterpillar Model 3056	(P/N: FAB-EBS-CAT-0PKT62-0417)
• Caterpillar Model 3056E	(P/N: FAB-EBS-CAT-064Z)
• Caterpillar Model 3066	(P/N: FAB-EBS-CAT-110-04Z)
• Caterpillar Model 3116 - 3126 T/TA	(P/N: FAB-EBS-CAT-124Z)
• Caterpillar Model 3208T - DITA 205-275 Kw	(P/N: FAB-EBS-CAT-147Z)
• Caterpillar Model 3304 Centre	(P/N: FAB-EBS-CAT-156 ZC)
• Caterpillar Model 3304 Rear	(P/N: FAB-EBS-CAT-160 RZ)
• Caterpillar Model 3306 Centre	(P/N: FAB-EBS-CAT-18 6Z)
• Caterpillar Model 3306 Gas	(P/N: FAB-EBS-CAT-216 GZ)
• Caterpillar Model 3406 Round Flange	(P/N: FAB-EBS-CAT-229Z)
• Caterpillar Model 3408 Gas	(P/N: FAB-EBS-CAT-2346Z)
• Caterpillar Model 3408 Standard	(P/N: FAB-EBS-CAT-2337Z)
• Caterpillar Model 3412 Gas	(P/N: FAB-EBS-CAT-2396Z)
• Caterpillar Model 3412T Dual Standard	(P/N: FAB-EBS-CAT-253Z)
• Caterpillar Model 3412T Single	(P/N: FAB-EBS-CAT-2368Z)
• Caterpillar Model 3412 Quad	(P/N: FAB-EBS-CAT-3469Z)
• Caterpillar Model 343T	(P/N: FAB-EBS-CAT-405Z)
• Caterpillar Model 3456T	(P/N: FAB-EBS-CAT-3483Z)
• Caterpillar Model 3508 Top Mounted Turbos	(P/N: FAB-EBS-CAT-3528Z)
• Caterpillar Model 3512 Dual Turbo	(P/N: FAB-EBS-CAT-3618Z)
• Caterpillar Model 3516 B 2250 Kw	(P/N: FAB-EBS-CAT-3779Z)
• Caterpillar Model 3516 Gas	(P/N: FAB-EBS-CAT-3791Z)
• Caterpillar Model 3520C Gas	(P/N: FAB-EBS-CAT-3798-12Z)
• Caterpillar Model 3612	(P/N: FAB-EBS-CAT-3806Z)
• Caterpillar Model 3616PG Gen Arrange	(P/N: FAB-EBS-CAT-3906Z)
• Caterpillar Model 379T	(P/N: FAB-EBS-CAT-524Z)
• Caterpillar Model 398T/399T	(P/N: FAB-EBS-CAT-544Z)
• Caterpillar Model C-12	(P/N: FAB-EBS-CAT-575Z)
• Caterpillar Model C-13 Two Stage	(P/N: FAB-EBS-CAT-588Z)
• Caterpillar Model C-15	(P/N: FAB-EBS-CAT-596Z)
• Caterpillar Model C-18 ACERT	(P/N: FAB-EBS-CAT-608Z)
• Caterpillar Model C-27 w/Charge Air Piping	(P/N: FAB-EBS-CAT-621-12Z)
• Caterpillar Model C-32 / C-27	(P/N: FAB-EBS-CAT-618-12Z)
• Caterpillar Model C-32 Charge Air Piping	(P/N: FAB-EBS-CAT-620-12Z)
• Caterpillar Model C-4.4	(P/N: FAB-EBS-CAT-642Z)
• Caterpillar Model C-6.6	(P/N: FAB-EBS-CAT-665Z)
• Caterpillar Model C-9 No bosses	(P/N: FAB-EBS-CAT-559Z)
• Caterpillar Model C-9 with bosses	(P/N: FAB-EBS-CAT-554Z)
• Caterpillar Model D353T	(P/N: FAB-EBS-CAT-515Z)
• Caterpillar Model D334	(P/N: FAB-EBS-CAT-3964Z)

Cummins Engine Removable Blankets

• Cummins Model 4BT/4BTA 3.9	(P/N: FAB-EBS-CU-110-04Z)
• Cummins Model 4CT-3.9	(P/N: FAB-EBS-CU-115-05Z)
• Cummins Model 6 BT-8.3G ISC260	(P/N: FAB-EBS-CU-123-04Z)
• Cummins Model 6 CT/CTA-8.3G	(P/N: FAB-EBS-CU-126-04Z)
• Cummins Model 6 AT 3.4	(P/N: FAB-EBS-CU-120-06Z)
• Cummins Model 6BT 5.9	(P/N: FAB-EBS-CU-122-04Z)
• Cummins Model 6BTA	(P/N: FAB-EBS-CU-123-14Z)
• Cummins Model Case 6TAA-8304	(P/N: FAB-EBS-CU-222-09Z)
• Cummins Model GTA 28	(P/N: FAB-EBS-CU-201-04Z)
• Cummins Model GTA14-G1	(P/N: FAB-EBS-CU-128-G04Z)
• Cummins Model GTA 855	(P/N: FAB-EBS-CU-280-04Z)
• Cummins Model ISL 330 / 400	(P/N: FAB-EBS-CU-221-08Z)
• Cummins Model ISX600	(P/N: FAB-EBS-CU-201-04Z)
• Cummins Model KT / KTA 38G1	(P/N: FAB-EBS-CU-160-5Z)
• Cummins Model KTA 1150 / KT19	(P/N: FAB-EBS-CU-151-04Z)
• Cummins Model KTA 19	(P/N: FAB-EBS-CU-151-04Z)
• Cummins Model KTA 50 G1.2.3	(P/N: FAB-EBS-CU-170-05Z)
• Cummins Model KTTA 50 G2 (K2000E)	(P/N: FAB-EBS-CU-172-06Z)
• Cummins Model KTTA 50 G3	(P/N: FAB-EBS-CU-173-05Z)
• Cummins Model KTTA 19 G2	(P/N: FAB-EBS-CU-155-05)
• Cummins Model KTTA 38	(P/N: FAB-EBS-CU-162-06Z)
• Cummins Model L10 (M11, N14) Centre Mount	(P/N: FAB-EBS-CU-128-04Z)
• Cummins Model NT / NTA 855-G1/2	(P/N: FAB-EBS-CU-130-04Z)
• Cummins Model NTT / NTTA 855-G2	(P/N: FAB-EBS-CU-132-07Z)
• Cummins Model NT / NTA 855-G3-4	(P/N: FAB-EBS-CU-131-04Z)
• Cummins Model QSB 6.7	(P/N: FAB-EBS-CU-174-08Z)
• Cummins Model QSB7 (DSGAA)	(P/N: FAB-EBS-CU-174-116Z)
• Cummins Model QSC 8.3	(P/N: FAB-EBS-CU-174-18Z)
• Cummins Model QSK-19	(P/N: FAB-EBS-CU-180-04Z)
• Cummins Model QSK50 G4 (DQGAB)	(P/N: FAB-EBS-CU-186-05Z)
• Cummins Model QSB7 (DSGAA)	(P/N: FAB-EBS-CU-174-116Z)
• Cummins Model QSC 8.3	(P/N: FAB-EBS-CU-174-18Z)
• Cummins Model QSK-19	(P/N: FAB-EBS-CU-180-04Z)
• Cummins Model QSK50 G4 (DQGAB)	(P/N: FAB-EBS-CU-186-05Z)
• Cummins Model QSL9	(P/N: FAB-EBS-CU-191-14Z)
• Cummins Model QSL9-G5 (ISL250)	(P/N: FAB-EBS-CU-191-08Z)
• Cummins Model QSM11	(P/N: FAB-EBS-CU-128-14Z)
• Cummins Model QST-30G Quantum	(P/N: FAB-EBS-CU-175-06Z)
• Cummins Model QSX15-G8	(P/N: FAB-EBS-CU-192-06Z)
• Cummins Model VTA-28	(P/N: FAB-EBS-CU-140-04Z)
• Cummins Model VTA-28-G5	(P/N: FAB-EBS-CU-145-04Z)

Daewoo Engine Removeable Insulation Blankets

• Daewoo Engine Model Excav Solar 130LC-V DB5AT	(P/N: FAB-EBS-DAE-12-5Z)
• Daewoo Engine Model D2840LE	(P/N: FAB-EBS-DAE-40-8Z)
• Daewoo Engine Model DB33A	(P/N: FAB-EBS-DAE-10-5Z)
• Daewoo Engine Model D1146T	(P/N: FAB-EBS-DAE-35-5Z)
• Daewoo Engine Model P126TI	(P/N: FAB-EBS-DAE-20-6Z)
• Daewoo Engine Model P158LE	(P/N: FAB-EBS-DAE-25-8Z)
• Daewoo Engine Model P180LE	(P/N: FAB-EBS-DAE-27-8Z)
• Daewoo Engine Model P222LE	(P/N: FAB-EBS-DAE-30-8Z)
• Daewoo Engine Model P086TI	(P/N: FAB-EBS-DAE-15-5Z)

Daimler Chrysler Engine Removeable Insulation Blankets

- | | |
|---------------------------------|---------------------------|
| • Mercedes Engine Model OM444LA | (P/N: FAB-EBS-DC-444-09Z) |
| • Mercedes Engine Model OM904 | (P/N: FAB-EBS-DC-904-05Z) |
| • Mercedes Engine Model OM906LA | (P/N: FAB-EBS-DC-906-05Z) |

Detroit Diesel Engine Removeable Insulation Blankets

- | | |
|--|------------------------------|
| • Detroit Diesel Engine Model 471T 1043-8K32 | (P/N: FAB-EBS-DD-0471-25Z) |
| • Detroit Diesel Engine Model 12V149T | (P/N: FAB-EBS-DD-1249-11Z) |
| • Detroit Diesel Engine Model 12V2000 | (P/N: FAB-EBS-DD-2012-06Z) |
| • Detroit Diesel Engine Model 12V4000 | (P/N: FAB-EBS-DD-4012-10Z) |
| • Detroit Diesel Engine Model 12V71T 7123-7400 | (P/N: FAB-EBS-DD-1271-14Z) |
| • Detroit Diesel Engine Model 12V92T | (P/N: FAB-EBS-DD-1292-10Z) |
| • Detroit Diesel Engine Model 16V149T | (P/N: FAB-EBS-DD-1649-10Z) |
| • Detroit Diesel Engine Model 16V2000 | (P/N: FAB-EBS-DD-2016-06Z) |
| • Detroit Diesel Engine Model 16V4000 | (P/N: FAB-EBS-DD-4016-10Z) |
| • Detroit Diesel Engine Model 16V4000 ADEC | (P/N: FAB-EBS-DD-4016-29Z) |
| • Detroit Diesel Engine Model 16V92 / 71T | (P/N: FAB-EBS-DD-1692-11Z) |
| • Detroit Diesel Engine Model 18V2000 | (P/N: FAB-EBS-DD-2018-08Z) |
| • Detroit Diesel Engine Model 20V149TIB | (P/N: FAB-EBS-DD-2049-14Z) |
| • Detroit Diesel Engine Model 20V4000 | (P/N: FAB-EBS-DD-4020-10Z) |
| • Detroit Diesel Engine Model Detroit 353T | (P/N: FAB-EBS-DD-0353-03Z) |
| • Detroit Diesel Engine Model 471T 1043-7305 | (P/N: FAB-EBS-DD-0471-14Z) |
| • Detroit Diesel Engine Model 4V53T | (P/N: FAB-EBS-DD-0453-03Z) |
| • Detroit Diesel Engine Model 671T 1063-7305 / 8600 | (P/N: FAB-EBS-DD-0671-04Z) |
| • Detroit Diesel Engine Model 671TA 1063-8600 High Mount | (P/N: FAB-EBS-DD-0671-24Z) |
| • Detroit Diesel Engine Model 6V71 | (P/N: FAB-EBS-DD-0671-15Z) |
| • Detroit Diesel Engine Model 6V92 / 71M 7062-3600 | (P/N: FAB-EBS-DD-0692-M08Z) |
| • Detroit Diesel Engine Model 6V92T 8063-7400 / 7B27 | (P/N: FAB-EBS-DD-0692T-10Z) |
| • Detroit Diesel Engine Model 6V92TA 8063-7K32 | (P/N: FAB-EBS-DD-0692-28Z) |
| • Detroit Diesel Engine Model 8.2T | (P/N: FAB-EBS-DD-08200-04Z) |
| • Detroit Diesel Engine Model 8V2000 | (P/N: FAB-EBS-DD-2008-06Z) |
| • Detroit Diesel Engine Model 8V4000 | (P/N: FAB-EBS-DD-4008-10Z) |
| • Detroit Diesel Engine Model 8V71T Marine 7082-3300 | (P/N: FAB-EBS-DD-0871-08MZ) |
| • Detroit Diesel Engine Model 8V71T 7082-7300 | (P/N: FAB-EBS-DD-0892-10Z) |
| • Detroit Diesel Engine Model 8V92T 8083-7300 | (P/N: FAB-EBS-DD-0892TT-10Z) |
| • Detroit Diesel Engine Model Series 40 DT466 | (P/N: FAB-EBS-DD-40S-04Z) |
| • Detroit Diesel Engine Model Series 50 | (P/N: FAB-EBS-DD-50S-04Z) |
| • Detroit Diesel Engine Model Series 60 | (P/N: FAB-EBS-DD-60S-04HZ) |

Deutz Diesel Engine Removeable Insulation Blankets

- | | |
|----------------------------------|------------------------------|
| • Deutz Engine Model BF12L-413FW | (P/N: FAB-EBS-DEU-413-193Z) |
| • Deutz Engine Model BF3L-2011 | (P/N: FAB-EBS-DEU-101-074Z) |
| • Deutz Engine Model BF4L-2011 | (P/N: FAB-EBS-DEU-101-084Z) |
| • Deutz Engine Model BF4M-1011F | (P/N: FAB-EBS-DEU-101-14Z) |
| • Deutz Engine Model BF4M-1012C | (P/N: FAB-EBS-DEU-101-2004Z) |
| • Deutz Engine Model BF4M-1012E | (P/N: FAB-EBS-DEU-101-204Z) |
| • Deutz Engine Model BF4M-1012EC | (P/N: FAB-EBS-DEU-101-209Z) |
| • Deutz Engine Model BF4M-1013C | (P/N: FAB-EBS-DEU-101-23Z) |
| • Deutz Engine Model BF4M-1013E | (P/N: FAB-EBS-DEU-101-248Z) |
| • Deutz Engine Model BF4M-1013EC | (P/N: FAB-EBS-DEU-101-261Z) |
| • Deutz Engine Model BF4M-1013FC | (P/N: FAB-EBS-DEU-101-268Z) |
| • Deutz Engine Model BF4M-1011EC | (P/N: FAB-EBS-DEU-101-19Z) |
| • Deutz Engine Model BF4M-2011 | (P/N: FAB-EBS-DEU-101-2694Z) |
| • Deutz Engine Model BF4M-2012C | (P/N: FAB-EBS-DEU-101-2704Z) |
| • Deutz Engine Model BF6M-2012C | (P/N: FAB-EBS-DEU-101-74Z) |

- Deutz Engine Model BF6L 913 (P/N: FAB-EBS-DEU-912-76Z)
- Deutz Engine Model BF6M-1013C (P/N: FAB-EBS-DEU-101-278Z)
- Deutz Engine Model BF6M-1013CP (P/N: FAB-EBS-DEU-101-31Z)
- Deutz Engine Model BF6M-1013E (P/N: FAB-EBS-DEU-101-44Z)
- Deutz Engine Model BF6M-1013EC (P/N: FAB-EBS-DEU-101-49Z)
- Deutz Engine Model BF6M-1013ECP (P/N: FAB-EBS-DEU-101-54Z)
- Deutz Engine Model BF6M-1013F / FC (P/N: FAB-EBS-DEU-101-64Z)
- Deutz Engine Model BF8M-1015C / CP (P/N: FAB-EBS-DEU-101-89Z)
- Deutz Engine Model F10L-413FW End Mount (P/N: FAB-EBS-DEU-413-178Z)
- Deutz Engine Model F12L-413 F / FW (P/N: FAB-EBS-DEU-413-183Z)
- Deutz Engine Model F6L-413-FW (P/N: FAB-EBS-DEU-413-153Z)
- Deutz Engine Model F8L-413-FW Center Mount (P/N: FAB-EBS-DEU-413-168Z)
- Deutz Engine Model TBD 616 12V (P/N: FAB-EBS-DEU-616-59Z)
- Deutz Engine Model TBD 616 8V (P/N: FAB-EBS-DEU-616-39Z)
- Deutz Engine Model TCD-2012L06 (P/N: FAB-EBS-DEU-750-08Z)
- Deutz Engine Model TCD2012L04-2V (P/N: FAB-EBS-DEU-201-24Z)
- Deutz Engine Model TCD2012L04-2V DCR (P/N: FAB-EBS-DEU-201-34Z)
- Deutz Engine Model TCD-2013L06 (P/N: FAB-EBS-DEU-753-08Z)
- Deutz Engine Model TCD2013L06-2V (P/N: FAB-EBS-DEU-201-54Z)

EMD Electro-Motive Diesel Engine Removeable Insulation Blankets

- EMD Engine Model 08V Blower 1 inch (P/N: FAB-EBS-EM-B08-1-8Z)
- EMD Engine Model 08V Blower with shield (P/N: FAB-EBS-EM-B08-S-8Z)
- EMD Engine Model 12V Turbo (P/N: FAB-EBS-EM-T12-1-12Z)
- EMD Engine Model 12V Blower 1 inch (P/N: FAB-EBS-EM-B12-1-8Z)
- EMD Engine Model 12V Blower with shield (P/N: FAB-EBS-EM-B12-S-8Z)
- EMD Engine Model 16V Blower 1 inch (P/N: FAB-EBS-EM-B16-1-8Z)
- EMD Engine Model 16V Blower with shield (P/N: FAB-EBS-EM-B16-S-8Z)
- EMD Engine Model 16V Turbo 1 inch (P/N: FAB-EBS-EM-T16-1-16Z)
- EMD Engine Model 20V Turbo 1 inch (P/N: FAB-EBS-EM-T20-1-20Z)
- EMD Engine Model 8V Turbo 1 inch (P/N: FAB-EBS-EM-T08-1-8Z)

Ford Engine Removeable Insulation Blankets

- Ford Engine Model 20Kw GGDB LRG-425I (P/N: FAB-EBS-FO-G4-04Z)
- Ford Engine Model 20RZ LSG 423 (P/N: FAB-EBS-FO-G4A-04Z)
- Ford Engine Model 30RZ LSG 649 (P/N: FAB-EBS-FO-G6-05Z)
- Ford Engine Model 35 / 45 Kw GGFB/C CSG649 (P/N: FAB-EBS-FO-G06-05Z)
- Ford Engine Model 45RZ LSG 649 (P/N: FAB-EBS-FO-KG6-05Z)
- Ford Engine Model Ford 50/70RZ LSG 875 (P/N: FAB-EBS-FO-KG8-06Z)
- Ford Engine Model 60/65 Kw GGHB LSG 875 (P/N: FAB-EBS-FO-G08-08Z)
- Ford Engine Model 70/100KW LSG 875 Industrial (P/N: FAB-EBS-FO-GSG18-8Z)
- Ford Engine Model 75/100Kw GGHD LSG 875 (P/N: FAB-EBS-FO-G28-08Z)
- Ford Engine Model 80/100RZ LSG 875 (P/N: FAB-EBS-FO-KG8-18Z)
- Ford Engine Model 80Kw GGHC LSG 875 (P/N: FAB-EBS-FO-G18-08Z)
- Ford Engine Model 85Kw GGHG/HH WSG-1068 (P/N: FAB-EBS-FO-G33-14Z)
- Ford Engine Model BSD444T (P/N: FAB-EBS-FO-B-5Z)
- Ford Engine Model WSG-1068 Naturally Aspired (P/N: FAB-EBS-FO-G34-12Z)

GM - General Motors Engine Removable Insulation Blankets

- GM Engine Model Vortec 4.3L Gas (P/N: FAB-EBS-GM-4.3-05Z)
- GM Engine Model 4M31 (P/N: FAB-EBS-GM-HAT-004Z)
- GM Engine Model Vortec 5.7L Gas (P/N: FAB-EBS-GM-5.7-07Z)
- GM Engine Model Vortec 8.1L Gas (P/N: FAB-EBS-GM-8.1-07Z)

Hercules Engine Removable Insulation Blankets

- Hercules Engine Model D2300T (P/N: FAB-EBS-HER-D005Z)
- Hercules Engine Model D3300T (P/N: FAB-EBS-HER-D105Z)
- Hercules Engine Model D3400T (P/N: FAB-EBS-HER-D205Z)
- Hercules Engine Model D4800TAH (P/N: FAB-EBS-HER-D405Z)
- Hercules Engine Model G3400 Gas Ver2 (P/N: FAB-EBS-HER-G626Z)
- Hercules Engine Model G3400T Gas (P/N: FAB-EBS-HER-G609Z)
- Hercules Engine Model G4800 Gas (P/N: FAB-EBS-HER-G718Z)
- Hercules Engine Model G4800T Gas (P/N: FAB-EBS-HER-G708Z)
- Hercules Engine Model International V605 Gas (P/N: FAB-EBS-HER-V605-6Z)

Isuzu Engine Removable Insulation Blankets

- Isuzu Engine Model 4BG1 Mid Mount (TPV) (P/N: FAB-EBS-ISU-44-6Z)
- Isuzu Engine Model 4JG1T (P/N: FAB-EBS-ISU-924Z)
- Isuzu Engine Model 6BB1 (QD-130) (P/N: FAB-EBS-ISU-52Z)
- Isuzu Engine Model 6BD1 (QD-145) (P/N: FAB-EBS-ISU-60-3Z)
- Isuzu Engine Model 6BD1T (QD-145T) (P/N: FAB-EBS-ISU-64Z)
- Isuzu Engine Model 6RB1T (QD-250T) (P/N: FAB-EBS-ISU-84Z)
- Isuzu Engine Model 6SA1 (QD-170) (P/N: FAB-EBS-ISU-70-3Z)
- Isuzu Engine Model 6SA1T (QD-170T) (P/N: FAB-EBS-ISU-74Z)
- Isuzu Engine Model 4HK1XYGV-02 (P/N: FAB-EBS-ISU-47-64Z)

Iveco Engine Removable Insulation Blankets

- Iveco Engine Model 8041 (P/N: FAB-EBS-IV-23Z)
- Iveco Engine Model 8061T (P/N: FAB-EBS-IV-414Z)
- Iveco Engine Model 8061TS125 (P/N: FAB-EBS-IV-424Z)
- Iveco Engine Model 8141S121 (P/N: FAB-EBS-IV-443Z)
- Iveco Engine Model 8210S102 (P/N: FAB-EBS-IV-453Z)
- Iveco Engine Model 8281SR126 (P/N: FAB-EBS-IV-545Z)
- Iveco Engine Model 8361S110 (P/N: FAB-EBS-IV-525Z)
- Iveco Engine Model 8361SR115 (P/N: FAB-EBS-IV-534Z)
- Iveco Engine Model N67ENTX 68.00 (P/N: FAB-EBS-IV-309Z)
- Iveco Engine Model NEF N45MSSD (P/N: FAB-EBS-IV-305Z)
- Iveco Engine Model 8041-S121 (P/N: FAB-EBS-IV-33Z)
- Iveco Engine Model 8061-SRM06 (P/N: FAB-EBS-IV-408Z)

John Deere Engine Removable Insulation Blankets

- John Deere Engine Model 6125 CK Power Option (P/N: FAB-EBS-JD-834Z)
- John Deere Engine Model 3029TF150 (P/N: FAB-EBS-JD-165Z)
- John Deere Engine Model 3179T (P/N: FAB-EBS-JD-154Z)
- John Deere Engine Model 4024HF285 (P/N: FAB-EBS-JD-244Z)
- John Deere Engine Model 4024TF (P/N: FAB-EBS-JD-234Z)
- John Deere Engine Model 4045TF150/4039T (P/N: FAB-EBS-JD-304Z)
- John Deere Engine Model 4039T (P/N: FAB-EBS-JD-308Z)
- John Deere Engine Model 4045 HF285 (P/N: FAB-EBS-JD-474Z)
- John Deere Engine Model 4045 TFM Power Tech (P/N: FAB-EBS-JD-434Z)
- John Deere Engine Model 4045HF485 (P/N: FAB-EBS-JD-464Z)
- John Deere Engine Model 4045T (P/N: FAB-EBS-JD-404Z)
- John Deere Engine Model 4045TF 4.5L Power Tech (P/N: FAB-EBS-JD-42AZ)
- John Deere Engine Model 4045TPWT 120 (P/N: FAB-EBS-JD-446EZ)
- John Deere Engine Model 4239A (P/N: FAB-EBS-JD-324Z)
- John Deere Engine Model 5030HF285 (P/N: FAB-EBS-JD-489Z)
- John Deere Engine Model 5030TF270B 3L (P/N: FAB-EBS-JD-484Z)
- John Deere Engine Model 6059T (P/N: FAB-EBS-JD-514Z)
- John Deere Engine Model 6068HF (P/N: FAB-EBS-JD-624Z)
- John Deere Engine Model 6068 HF (P/N: FAB-EBS-JD-674Z)
- John Deere Engine Model 6068HF275 (P/N: FAB-EBS-JD-644Z)
- John Deere Engine Model 6068HF485 (P/N: FAB-EBS-JD-669Z)

- | | |
|--|---------------------------|
| • John Deere Engine Model 6068T Power Tech | (P/N: FAB-EBS-JD-614Z) |
| • John Deere Engine Model 6068TF150/250 | (P/N: FAB-EBS-JD-604Z) |
| • John Deere Engine Model 6076A/6619A | (P/N: FAB-EBS-JD-7A04Z) |
| • John Deere Engine Model 6076H | (P/N: FAB-EBS-JD-7H04Z) |
| • John Deere Engine Model 6076T | (P/N: FAB-EBS-JD-7TO4Z) |
| • John Deere Engine Model 6081 Powertech | (P/N: FAB-EBS-JD-819Z) |
| • John Deere Engine Model 6081AF/HF | (P/N: FAB-EBS-JD-804AFZ) |
| • John Deere Engine Model 6081AFM | (P/N: FAB-EBS-JD-809-4Z) |
| • John Deere Engine Model 6081T/TF | (P/N: FAB-EBS-JD-814TZ) |
| • John Deere Engine Model 6090HF485 | (P/N: FAB-EBS-JD-886Z) |
| • John Deere Engine Model 6125HF/6105AF | (P/N: FAB-EBS-JD-824Z) |
| • John Deere Engine Model 6135HF485 | (P/N: FAB-EBS-JD-864Z) |
| • John Deere Engine Model 6359A | (P/N: FAB-EBS-JD-504Z) |
| • John Deere Engine Model J620 | (P/N: FAB-EBS-JD-620-18Z) |

Kubota Engine Removable Insulation Blankets

- | | |
|--|--------------------------|
| • Kubota Engine Model V1305 / V1505 (BG) Manifold 16616-12312 | (P/N: FAB-EBS-KB-B4T-03) |
| • Kubota Engine Model V1505T | (P/N: FAB-EBS-KB-B4T-11) |
| • Kubota Engine Model D1105-BG | (P/N: FAB-EBS-KB-B2F-21) |
| • Kubota Engine Model V2003TBG | (P/N: FAB-EBS-KB-B5-21) |
| • Kubota Engine Model V2203 | (P/N: FAB-EBS-KB-B5-41) |
| • Kubota Engine Model V2203M3 / V2003 | (P/N: FAB-EBS-KB-B5-42) |
| • Kubota Engine Model V2403-M-T | (P/N: FAB-EBS-KB-B5-66) |
| • Kubota Engine Model V2403 Turbo w/ straight out adapter option | (P/N: FAB-EBS-KB-B5-71) |
| • Kubota Engine Model V3300T | (P/N: FAB-EBS-KB-B6-21) |
| • Kubota Engine Model V3800 | (P/N: FAB-EBS-KB-B6-44Z) |

Lister Petter Engine Removable Insulation Blankets

- | | |
|--|---------------------------|
| • Lister Petter Engine Model CS4 | (P/N: FAB-EBS-LP-CS-03Z) |
| • Lister Petter Engine Model LPW3 | (P/N: FAB-EBS-LP-L3-03Z) |
| • Lister Petter Engine Model LPWT4 | (P/N: FAB-EBS-LP-LT4-05Z) |
| • Lister Petter Engine Model TR/S 3 | (P/N: FAB-EBS-LP-S3-05Z) |
| • Lister Petter Engine Model TS 2 | (P/N: FAB-EBS-LP-S2-05Z) |
| • Lister Petter Engine Model LPW3 A113 | (P/N: FAB-EBS-LP-L3-11Z) |

Lombardini Engine Removable Insulation Blankets

- | | |
|-------------------------------------|----------------------------|
| • Lombardini Engine Model 1204 | (P/N: FAB-EBS-LOM-1204-8Z) |
| • Lombardini Engine Model LDW 1603 | (P/N: FAB-EBS-LOM-1603-1) |
| • Lombardini Engine Model LDW 2004T | (P/N: FAB-EBS-LOM-2004-1) |

Mercedes Engine Removable Insulation Blankets

- | | |
|---------------------------------|-----------------------------|
| • Mercedes Engine Model OM904 | (P/N: FAB-EBS-MERC-904-05Z) |
| • Mercedes Engine Model OM906LA | (P/N: FAB-EBS-MERC-906-05Z) |

Merlin Engine Removable Insulation Blankets

- | | |
|--|--------------------------|
| • Merlin Marine Turbocharger 6"W x 16.5"L | (P/N: FAB-EBS-MM-E4) |
| • Merlin Marine Turbocharger 7"W x 16.52"L | (P/N: FAB-EBS-MM-E4/7SP) |
| • Merlin Marine Turbocharger 6"W x 19.5"L | (P/N: FAB-EBS-MM-E4B) |
| • Merlin Marine Turbocharger 6"W x 25"L | (P/N: FAB-EBS-MM-E6/9) |
| • Merlin Marine Turbocharger 9"W x 29"L | (P/N: FAB-EBS-MM-E7) |
| • Merlin Marine Turbocharger 8"W x 24"L | (P/N: FAB-EBS-MM-E8) |

Mitsubishi Engine Removable Insulation Blankets

• Mitsubishi Engine Model 4D31T	(P/N: FAB-EBS-MIT-4D31T-04Z)
• Mitsubishi Engine Model 4D34T	(P/N: FAB-EBS-MIT-4D34T-12)
• Mitsubishi Engine Model 6D14	(P/N: FAB-EBS-MIT-6D14-03Z)
• Mitsubishi Engine Model 6D14D	(P/N: FAB-EBS-MIT-6D14D-04Z)
• Mitsubishi Engine Model 6D14T	(P/N: FAB-EBS-MIT-6D14T-04Z)
• Mitsubishi Engine Model 6D16T	(P/N: FAB-EBS-MIT-6D16T-04Z)
• Mitsubishi Engine Model 6D16T/B No Bracket	(P/N: FAB-EBS-MIT-6D16T-14Z)
• Mitsubishi Engine Model 6D22T/B	(P/N: FAB-EBS-MIT-6D22T-04Z)
• Mitsubishi Engine Model 6D22TC	(P/N: FAB-EBS-MIT-6D22TC-04Z)
• Mitsubishi Engine Model 6D24 12L	(P/N: FAB-EBS-MIT-6D24-04Z)
• Mitsubishi Engine Model 6D31T	(P/N: FAB-EBS-MIT-6D31T-04Z)
• Mitsubishi Engine Model 8DC9 16L	(P/N: FAB-EBS-MIT-8DC9-06Z)
• Mitsubishi Engine Model S12A2 33.9L	(P/N: FAB-EBS-MIT-S12-05Z)
• Mitsubishi Engine Model S12A2-TA 33.9L	(P/N: FAB-EBS-MIT-S12-13Z)
• Mitsubishi Engine Model S12H PTA	(P/N: FAB-EBS-MIT-S12-20Z)
• Mitsubishi Engine Model S12H TA 37.1L	(P/N: FAB-EBS-MIT-S12-24Z)
• Mitsubishi Engine Model S12N	(P/N: FAB-EBS-MIT-S12-35Z)
• Mitsubishi Engine Model S16N	(P/N: FAB-EBS-MIT-S16-04Z)
• Mitsubishi Engine Model S16R (PTA)	(P/N: FAB-EBS-MIT-S16-28Z)
• Mitsubishi Engine Model S4FT	(P/N: FAB-EBS-MIT-S04FT-03Z)
• Mitsubishi Engine Model S4S DT	(P/N: FAB-EBS-MIT-S04SDT-4Z)
• Mitsubishi Engine Model S6A3-TA 18.5L	(P/N: FAB-EBS-MIT-S06-5Z)
• Mitsubishi Engine Model S6B3-TA 14.6L	(P/N: FAB-EBS-MIT-S06-16Z)
• Mitsubishi Engine Model S6R2-TA 30L	(P/N: FAB-EBS-MIT-S06R-14Z)
• Mitsubishi Engine Model S6R-TA	(P/N: FAB-EBS-MIT-S06R-05Z)

Nissan Engine Removable Insulation Blankets

• Nissan Engine Model PE-6T	(P/N: FAB-EBS-NIS-PE6T-8Z)
-----------------------------	----------------------------

Onan Cummins Engine Removable Insulation Blankets

• Onan Cummins Engine Model 1000Kw(60Hz) DFJD KTA38-G4	(P/N: FAB-EBS-ONCU-160JD4-5Z)
• Onan Cummins Engine Model 110Kw DGEA 6CT8.3-G1	(P/N: FAB-EBS-ONCU-126EA-04Z)
• Onan Cummins Engine Model 1100Kw (60Hz) DFLB KTA50-G2	(P/N: FAB-EBS-ONCU-170LB-05Z)
• Onan Cummins Engine Model 1120Kw DFLC KTA50-G3	(P/N: FAB-EBS-ONCU-170LC-05Z)
• Onan Cummins Engine Model 1200Kw DFLD KTA50-G4	(P/N: FAB-EBS-ONCU-170LD-05Z)
• Onan Cummins Engine Model 1275Kw DFLE KTA50-G8/9	(P/N: FAB-EBS-ONCU-170LE-05Z)
• Onan Cummins Engine Model 1280Kw DFMB KTA50-G2	(P/N: FAB-EBS-ONCU-172MB-06Z)
• Onan Cummins Engine Model 140Kw DGFA 6CTA8.3-G1	(P/N: FAB-EBS-ONCU-126FA-04Z)
• Onan Cummins Engine Model 150Kw DGFB 6CTA8.3-G1	(P/N: FAB-EBS-ONCU-126FB-04Z)
• Onan Cummins Engine Model 175 DFAA LTA10-G3	(P/N: FAB-EBS-ONCU-128AA3-04Z)
• Onan Cummins Engine Model 175 DGFC 6C	(P/N: FAB-EBS-ONCU-126FC-04Z)
• Onan Cummins Engine Model 200Kw (60Hz) DFAA LTA10 G1	(P/N: FAB-EBS-ONCU-128AA1-04Z)
• Onan Cummins Engine Model 200Kw (60Hz) DQAA M11-G2	(P/N: FAB-EBS-ONCU-128AA-04Z)
• Onan Cummins Engine Model 220Kw DFAC LTA10-G3	(P/N: FAB-EBS-ONCU-128AC3-04Z)
• Onan Cummins Engine Model 230Kw (60Hz) DFAB LTA10-G1	(P/N: FAB-EBS-ONCU-128AB-04Z)
• Onan Cummins Engine Model 250Kw (60Hz) DFAC LTA10-G1	(P/N: FAB-EBS-ONCU-128AC1-04Z)
• Onan Cummins Engine Model 250Kw (60Hz) DQAB M11-G2	(P/N: FAB-EBS-ONCU-128AB2-04Z)
• Onan Cummins Engine Model 250Kw DFBF NT855-G6	(P/N: FAB-EBS-ONCU-13.1BF-04Z)
• Onan Cummins Engine Model 250Kw (60Hz) DGAC 6AT 3.4	(P/N: FAB-EBS-ONCU-1020AC-06Z)
• Onan Cummins Engine Model 275Kw DFCB NTA855-G2	(P/N: FAB-EBS-ONCU-130CB-04Z)
• Onan Cummins Engine Model 300Kw (60Hz) DQBA N14-G2	(P/N: FAB-EBS-ONCU-128BA-04Z)
• Onan Cummins Engine Model 330Kw DFEB KTA19-G2	(P/N: FAB-EBS-ONCU-150EB-04Z)
• Onan Cummins Engine Model 350Kw (60Hz) DFCC NTA855-G2	(P/N: FAB-EBS-ONCU-131CC2-04Z)
• Onan Cummins Engine Model 350Kw (60Hz) DFCC NTA855-G3	(P/N: FAB-EBS-ONCU-131CC3-04Z)
• Onan Cummins Engine Model 350Kw (60Hz) DQBB N14-G2	(P/N: FAB-EBS-ONCU-128BB-04Z)

- Onan Cummins Engine Model 352-440Kw DFEH/J/K QSX15-G2 (P/N: FAB-EBS-ONCU-192-06Z)
- Onan Cummins Engine Model 400Kw DGCA 4BT3.9-G4 (P/N: FAB-EBS-ONCU-110CA-04Z)
- Onan Cummins Engine Model 400kw (60Hz) DFCE NTA855-G6 (P/N: FAB-EBS-ONCU-131CE-04Z)
- Onan Cummins Engine Model 400kw DFEC KTA19-G2 (P/N: FAB-EBS-ONCU-151EC-04Z)
- Onan Cummins Engine Model 450Kw DFED KTA19-G2 (P/N: FAB-EBS-ONCU-151ED-04Z)
- Onan Cummins Engine Model 450Kw DFGA VTA 28 G5 (P/N: FAB-EBS-ONCU-145GA-05Z)
- Onan Cummins Engine Model 500Kw DGCB 4BT3.9-G4 (P/N: FAB-EBS-ONCU-110CB-04Z)
- Onan Cummins Engine Model 550Kw DFGB VTA 28 G5 (P/N: FAB-EBS-ONCU-145GB-05Z)
- Onan Cummins Engine Model 620Kw DFHA QST30-G1 (P/N: FAB-EBS-ONCU-175HA-05Z)
- Onan Cummins Engine Model 620Kw DFJC KTA38-G1 (P/N: FAB-EBS-ONCU-160JA-05Z)
- Onan Cummins Engine Model 650kW DGDA 6BT5.9-G1 (P/N: FAB-EBS-ONCU-122DA-04Z)
- Onan Cummins Engine Model 660Kw DFJB KTA38-G3 (P/N: FAB-EBS-ONCU-160JB-05Z)
- Onan Cummins Engine Model 700Kw DFHB QST30-G2 (P/N: FAB-EBS-ONCU-175HB-05Z)
- Onan Cummins Engine Model 800Kw DGCG 4BT3.9-G4 (P/N: FAB-EBS-ONCU-110CG-04Z)
- Onan Cummins Engine Model 800Kw DFJC KTA38-G3 (P/N: FAB-EBS-ONCU-160JC-5Z)
- Onan Cummins Engine Model 850Kw DGDB 6BT5.9-G2 (P/N: FAB-EBS-ONCU-122DB-04Z)
- Onan Cummins Engine Model 880Kw DFJD KTA38-G5 (P/N: FAB-EBS-ONCU-160JDS-5Z)
- Onan Cummins Engine Model 900Kw(60Hz) DFHC/DQFAD QST30-G3 (P/N: FAB-EBS-ONCU-175HC-05Z)
- Onan Cummins Engine Model Paxman 12YL (P/N: FAB-EBS-ONCU-PAX-12YL-30Z)
- Onan Cummins Engine Model Paxman 8YLCM with Shield Cover (P/N: FAB-EBS-ONCU-PAX-08YL-18Z)
- Onan Cummins Engine Model QSL G5 Engine Set DQDAA, AB, AC, DSHAB (P/N: FAB-EBS-ONCU-191-08Z)

Perkins Engine Removable Insulation Blankets

- Perkins Engine Model 1004-4T (P/N: FAB-EBS-PER-65-04Z)
- Perkins Engine Model 1006-TG (P/N: FAB-EBS-PER-62-041Z)
- Perkins Engine Model 1106C/1106D-(E)866TA (P/N: FAB-EBS-PER-81-08Z)
- Perkins Engine Model 1306-8TGA / 9TAG1 / DT466 (P/N: FAB-EBS-PER-D40S-04Z)
- Perkins Engine Model 2006-TG1 / 2A-C8TA (P/N: FAB-EBS-PER-64-14Z)
- Perkins Engine Model 4012 TAG2-12SE (P/N: FAB-EBS-PER-500-20Z)
- Perkins Engine Model 6.354 N (P/N: FAB-EBS-PER-60-04Z)
- Perkins Engine Model T4.236 (P/N: FAB-EBS-PER-42-04Z)
- Perkins Engine Model T4.236TP (P/N: FAB-EBS-PER-42-TPK04Z)
- Perkins Engine Model T6.3544 (P/N: FAB-EBS-PER-61-04Z)

Pielstick Engine Removable Insulation Blankets

- Pielstick Engine 18 PA6V-280 (P/N: FAB-EBS-PSK-18PA6V-20Z)

Spectrum Engine Removable Insulation Blankets

- Spectrum Engine Model DS200 671T 1063-7305 (P/N: FAB-EBS-SPD-0671-04Z)
- Spectrum Engine Model DS15/1600 16V149T (P/N: FAB-EBS-SPD-1649-10Z)
- Spectrum Engine Model DS150 Series 40 DT466 (P/N: FAB-EBS-SPD-40S-04Z)
- Spectrum Engine Model DS230/300 6V92T/TA (P/N: FAB-EBS-SPD-0692-10Z)
- Spectrum Engine Model DS350 8V92T 8083-7305 (P/N: FAB-EBS-SPD-0892T-10Z)
- Spectrum Engine Model DS400 8V92HO 8083-7416 (P/N: FAB-EBS-SPD-0892-H8Z)
- Spectrum Engine Model DS450 12V71TA 7123-7305 (P/N: FAB-EBS-SPD-1271-14Z)
- Spectrum Engine Model DS450 12V71TA 7123-7406 (P/N: FAB-EBS-SPD-1271C-05Z)
- Spectrum Engine Model DS50/60 T4.236 (P/N: FAB-EBS-SPD-PKT42-04Z)
- Spectrum Engine Model DS500/600 12V92TA (P/N: FAB-EBS-SPD-1292-10Z)
- Spectrum Engine Model DS750/800 16V92T (P/N: FAB-EBS-SPD-1692-11Z)
- Spectrum Engine Model DS80/100 1006-TG (P/N: FAB-EBS-SPD-PKT62-041Z)
- Spectrum Engine Model DS900/1200 12V149T (P/N: FAB-EBS-SPD-1249-11Z)
- Spectrum Engine Model DSE400 Series 60 Mid Mount (P/N: FAB-EBS-SPD-60S-14MZ)
- Spectrum Engine Model GS150 Series 50 Gas (P/N: FAB-EBS-SPD-50S-04Z)
- Spectrum Engine Model GSG 35 GM 4.3L Gas (P/N: FAB-EBS-SPD-M-4.3-13Z)
- Spectrum Engine Model GSG 50 GM Vortec 5.7L (P/N: FAB-EBS-SPD-M-5.7-07Z)
- Spectrum Engine Model GSG 60 GM Vortec 5.7L (P/N: FAB-EBS-SPD-M-5.7-17Z)

Stork Engine Removable Insulation Blankets

- Stork Engine 240F 6FHD (P/N: FAB-EBS-STK-240-18Z)

Superior Engine Removable Insulation Blankets

- Superior Engine Model 16SGTA (P/N: 16SGTA-18Z)

VM Motori Engine Removable Insulation Blankets

- VM Motori Engine Model D703 LE (P/N: FAB-EBS-VMM-703LE-10Z)
- VM Motori Engine Model D703 LTE (P/N: FAB-EBS-VMM-703LTE-10Z)
- VM Motori Engine Model D704 LTE (P/N: FAB-EBS-VMM-704LTE-10Z)
- VM Motori Engine Model D706 LTE (P/N: FAB-EBS-VMM-706LTE-07Z)

Volvo Engine Removable Insulation Blankets

- Volvo Engine Model TAD(TWD)740/741GE (P/N: FAB-EBS-VOL-0740-05Z)
- Volvo Engine Model T1D73AC (P/N: FAB-EBS-VOL-71-05Z)
- Volvo Engine Model TAD 1232GE (P/N: FAB-EBS-VOL-1232-06Z)
- Volvo Engine Model TAD 1240/1242GE (P/N: FAB-EBS-VOL-1242-06Z)
- Volvo Engine Model TAD1030/1031GE (P/N: FAB-EBS-VOL-1030-05Z)
- Volvo Engine Model TAD1630/31G/E (16.1A65) (P/N: FAB-EBS-VOL-1631-05Z)
- Volvo Engine Model TAD1640/1641GE (16.1B65) (P/N: FAB-EBS-VOL-1641-09Z)
- Volvo Engine Model TD73ED (P/N: FAB-EBS-VOL-73-05Z)
- Volvo Engine Model L220E (P/N: FAB-EBS-VOL-811-9Z)

Wartsila Engine Removable Insulation Blankets

- Wartsila Engine Model UD 23 (P/N: FAB-EBS-WAR-23-09Z)
- Wartsila Engine Model UD 30 Y16 S4D/S6D (P/N: FAB-EBS-WAR-30-08Z)

Waukesha Engine Removable Insulation Blankets

- Waukesha Engine Model 7042 GSI (P/N: FAB-EBS-WAU-1006Z)
- Waukesha Engine Model 12V-AT25 & 27 GL (P/N: FAB-EBS-WAU-2520Z)
- Waukesha Engine Model 7042 GLE (P/N: FAB-EBS-WAU-1029Z)
- Waukesha Engine Model 7042 GLE GNV Version (P/N: FAB-EBS-WAU-1050Z)
- Waukesha Engine Model F1197G (P/N: FAB-EBS-WAU-1106Z)
- Waukesha Engine Model L36GLD-12CYL (P/N: FAB-EBS-WAU-1209Z)
- Waukesha Engine Model VRG-330S 5.4L (P/N: FAB-EBS-WAU-1129Z)

Yanmar Engine Removable Insulation Blankets

- Yanmar Engine Model 4TNE88 (P/N: FAB-EBS-YAN-4TN-12Z)
- Yanmar Engine Model 4TNV106T-XTBL (P/N: FAB-EBS-YAN-4TV-21)
- Yanmar Engine Model 4TNV84T-GGA (P/N: FAB-EBS-YAN-4TV-14Z)

Removable Engine Blanket Set for Gensets – UL2200 1200°F / 648°C

Diesel, Gasoline/Petrol and Natural Gas Piston and Gas Turbine Engines

Standard engine insulation blanket sets for the following engine makes and models are available (The Part Number is the ordering code for the complete set for that engine.)

Caterpillar Genset Removable Blankets

- CAT 3304 Genset (P/N: FAB-GBS-CAT-3304A3-08Z)

Generac Genset Removeable Insulation Blankets

- Generac Genset Model Mazda 3L Turbo, Diesel, 30Kw (P/N: FAB-GBS-GEN-030-3-A15Z)
- Generac Genset Model Hino 4L, Diesel, 30Kw (P/N: FAB-GBS-GEN-030-4.0-6Z)
- Generac Genset Model 3L-4 CYL I/L, Diesel, 35Kw (P/N: FAB-GBS-GEN-035-3.0-04Z)
- Generac Genset Model Mazda 3L, Diesel, 35Kw (P/N: FAB-GBS-GEN-035-3-B15Z)
- Generac Genset Model GM 4.3L, Gas, 35Kw (P/N: FAB-GBS-GEN-035-4.3-A03Z)
- Generac Genset Model GM 5.7L, Nat Gas, 35Kw (P/N: FAB-GBS-GEN-035-5.7-A5Z)
- Generac Genset Model GM 5.7L, Nat Gas, 40K (P/N: FAB-GBS-GEN-040-5.7-B5Z)
- Generac Genset Model GM 4.3L, Gas, 50Kw (P/N: FAB-GBS-GEN-050-4.3-A13Z)
- Generac Genset Model Hino 4L Turbo, 50Kw aftercooler (P/N: FAB-GBS-GEN-050-4-A26Z)
- Generac Genset Model 4T/A, Diesel, 50Kw (P/N: FAB-GBS-GEN-050-4-B24Z)
- Generac Genset Model GM 5.7L, Nat Gas, 50Kw (P/N: FAB-GBS-GEN-050-5.7-C5Z)
- Generac Genset Model GM 4.3L Gas, 60Kw Engine Blanket Set (P/N: FAB-GBS-GEN-060-4.3-A19)
- Generac Genset Model 4T/A Diesel, 60Kw Engine Blanket Set (P/N: FAB-GBS-GEN-060-4-C24Z)
- Generac Genset Model GM 5.7 Nat Gas, 60Kw (P/N: FAB-GBS-GEN-060-5.7-D5Z)
- Generac Genset Model Ford 5L Diesel, 60Kw (P/N: FAB-GBS-GEN-060-5-A06Z)
- Generac Genset Model GM 4.3L Gas, 75Kw (P/N: FAB-GBS-GEN-075-4.3-B19Z)
- Generac Genset Model Hino 4L Diesel with aftercooler, 75Kw (P/N: FAB-GBS-GEN-075-4-C26Z)
- Generac Genset Model 4T/A Diesel, 75Kw (P/N: FAB-GBS-GEN-075-4-D24Z)
- Generac Genset Model CSG 649 5L Diesel, 80Kw Ford Turbo (P/N: FAB-GBS-GEN-080-5-B05Z)
- Generac Genset Model CSG 649 5L Diesel, 100Kw Ford Turbo (P/N: FAB-GBS-GEN-100-5-C05Z)
- Generac Genset Model GM 7.4TA/GD Gas, 100Kw (P/N: FAB-GBS-GEN-100-7.4-113Z)
- Generac Genset Model GSG 649 5L Diesel, Ford Turbo, 125Kw (P/N: FAB-GBS-GEN-125-5-D08Z)
- Generac Genset Model 7.5L Diesel, 130Kw (P/N: FAB-GBS-GEN-130-7.5-A08Z)
- Generac Genset Model 13.3T/A Gas, 150Kw (P/N: FAB-GBS-GEN-150-13.3-A4Z)
- Generac Genset Model GM 7.4TA/GD Gas, 150Kw (P/N: FAB-GBS-GEN-150-7.4-113Z)
- Generac Genset Model 7.5L Diesel, 150Kw (P/N: FAB-GBS-GEN-150-7.5-B08Z)
- Generac Genset Model 7.5L Diesel, 155Kw (P/N: FAB-GBS-GEN-155-7.5-C08Z)
- Generac Genset Model 13.3T/A, Gas, 175Kw (P/N: FAB-GBS-GEN-175-13.3-B4Z)
- Generac Genset Model TAC 6D24TS Diesel, 180Kw (P/N: FAB-GBS-GEN-180-12-A04Z)
- Generac Genset Model SD180/200 Mitsubishi 7.5 DMTA, 180Kw/200Kw (P/N: FAB-GBS-GEN-180-7.5-A08Z)
- Generac Genset Model 7.5L Diesel 180Kw (P/N: FAB-GBS-GEN-180-7.5-D08Z)
- Generac Genset Model TAC 6D24TS Diesel 200Kw (P/N: FAB-GBS-GEN-200-12-B04Z)
- Generac Genset Model 13.3T/A Gas 200Kw (P/N: FAB-GBS-GEN-200-13.3-C4Z)
- Generac Genset Model TAC 6D24TS 12L Diesel, 230Kw (P/N: FAB-GBS-GEN-230-12-C04Z)
- Generac Genset Model 13.3T/A Gas, 230Kw (P/N: FAB-GBS-GEN-230-13.3-D4Z)
- Generac Genset Model TAC 6D24TS 12L Diesel, 250Kw (P/N: FAB-GBS-GEN-250-12-D04Z)
- Generac Genset Model 13.3T/A Gas 250Kw (P/N: FAB-GBS-GEN-250-13.3-E4Z)
- Generac Genset Model 13.3L Diesel 275Kw (P/N: FAB-GBS-GEN-275-13.3-F4Z)
- Generac Genset Model 13.3T/A Gas 275Kw (P/N: FAB-GBS-GEN-275-13.3-G4Z)
- Generac Genset Model 13.3L Diesel 300Kw (P/N: FAB-GBS-GEN-300-13.3-H4Z)
- Generac Genset Model 13L Diesel 350Kw (P/N: FAB-GBS-GEN-350-13-04Z)
- Generac Genset Model 6D24 12L Diesel 300Kw (P/N: FAB-GBS-GEN-MIT6D24-04Z)
- Generac Genset Model 8V 8DC9 16L Diesel 400Kw (P/N: FAB-GBS-GEN-MIT8DC9-06Z)
- Generac Genset Model S6B3-TA 14.6L Gas 400Kw (P/N: FAB-GBS-GEN-MITS06-16Z)

- | | |
|--|--------------------------------|
| • Generac Genset Model S6A3-TA 18.5L Gas 500Kw | (P/N: FAB-GBS-GEN-MITS06-5Z) |
| • Generac Genset Model S6R-TA 24.5L Gas 625Kw | (P/N: FAB-GBS-GEN-MITS06R-5Z) |
| • Generac Genset Model S6R2-TA Gas 750Kw | (P/N: FAB-GBS-GEN-MITS0R-14Z) |
| • Generac Genset Model S12A2 33.9L Gas 800Kw | (P/N: FAB-GBS-GEN-MITS12-05Z) |
| • Generac Genset Model S12A2-TA 33.9L Gas 800Kw | (P/N: FAB-GBS-GEN-MITS12-13Z) |
| • Generac Genset Model S12H TA 37.1L Gas 1020Kw | (P/N: FAB-GBS-GEN-MITS12-24Z) |
| • Generac Genset Model S12A2-TA 33.9L Gas 1130Kw | (P/N: FAB-GBS-GEN-MITS12-A13Z) |

Kohler Genset Removeable Insulation Blankets

- | | |
|---|--------------------------------|
| • Kohler Genset Model 200ROZD 671T 1063-7305 | (P/N: FAB-GBS-KOH-0671-04Z) |
| • Kohler Genset Model 230/300ROZD 6V92/71T 8063-7305 | (P/N: FAB-GBS-KOH-0692-10Z) |
| • Kohler Genset Model 350ROZD 8V71T 8083-7305 | (P/N: FAB-GBS-KOH-0892-10Z) |
| • Kohler Genset Model 400ROZD 8V92HO 8083-7416 | (P/N: FAB-GBS-KOH-0892-H8Z) |
| • Kohler Genset Model 350ROZD 8V92T 8083-7405 | (P/N: FAB-GBS-KOH-0892T-10Z) |
| • Kohler Genset Model 900-1200ROZD 12V-149TI | (P/N: FAB-GBS-KOH-1249-11Z) |
| • Kohler Genset Model 450ROZD 12V71T 7123-7406H | (P/N: FAB-GBS-KOH-1271C-05Z) |
| • Kohler Genset Model 5/600ROZD 12V92T 8123-7416 | (P/N: FAB-GBS-KOH-1292-10Z) |
| • Kohler Genset Model 1500ROZD 16V-149TIB | (P/N: FAB-GBS-KOH-1649-10Z) |
| • Kohler Genset Model 750/800ROZD 16V92/71T 8163-7405 | (P/N: FAB-GBS-KOH-1692-11Z) |
| • Kohler Genset Model 2000ROZD 20V149TI | (P/N: FAB-GBS-KOH-2049-14Z) |
| • Kohler Genset Model 1000ROZD 24V71T | (P/N: FAB-GBS-KOH-2471-24CZ) |
| • Kohler Genset Model REOZP 200, 40S 8.7L | (P/N: FAB-GBS-KOH-40S-04Z) |
| • Kohler Genset Model REOZD (RZD) 135/350, 60S 12.7L | (P/N: FAB-GBS-KOH-60S-14MZ) |
| • Kohler Genset Model REOZD 135/350, 60S 12.7L WG | (P/N: FAB-GBS-KOH-60S-19MZ) |
| • Kohler Genset Model REOZD 400, 60S 14L | (P/N: FAB-GBS-KOH-60S-38Z) |
| • Kohler Genset Model ROZK 40, BF4M-1011F | (P/N: FAB-GBS-KOH-EU-101-14Z) |
| • Kohler Genset Model ROZK 50, BF4M-1012E | (P/N: FAB-GBS-KOH-EU-101-204Z) |
| • Kohler Genset Model ROZK 60, BF4M-1012EC | (P/N: FAB-GBS-KOH-EU-101-209Z) |
| • Kohler Genset Model ROZK 70, BF4M-1013E | (P/N: FAB-GBS-KOH-EU-101-248Z) |
| • Kohler Genset Model ROZK 80/90, BF4M-1013EC | (P/N: FAB-GBS-KOH-EU-101-261Z) |
| • Kohler Genset Model ROZK 100, BF4M-1013FC | (P/N: FAB-GBS-KOH-EU-268Z) |
| • Kohler Genset Model ROZK 115, BF6M-1013E | (P/N: FAB-GBS-KOH-EU-101-44Z) |
| • Kohler Genset Model ROZK 135/150, BF6M-1013EC | (P/N: FAB-GBS-KOH-EU-101-49Z) |
| • Kohler Genset Model ROZK 170, BF6M-1013FC | (P/N: FAB-GBS-KOH-EU-101-64Z) |
| • Kohler Genset Model REOZD-4 450, 8V2000 | (P/N: FAB-GBS-KOH-2008-06Z) |
| • Kohler Genset Model ROZD-4 5-600, 12V2000 | (P/N: FAB-GBS-KOH-2012-06Z) |
| • Kohler Genset Model REOZDB 650, 12V2000 Mid Mount | (P/N: FAB-GBS-KOH-2012-18Z) |
| • Kohler Genset Model ROZD-4 750-1000, 16V2000 | (P/N: FAB-GBS-KOH-2016-06Z) |
| • Kohler Genset Model REOZDB 900, 16V2000 Mid Mount | (P/N: FAB-GBS-KOH-28Z) |
| • Kohler Genset Model ROZD-4 1250/1500, 12V4000 | (P/N: FAB-GBS-KOH-4012-10Z) |
| • Kohler Genset Model ROZD-4 1750/2000, 16V4000 | (P/N: FAB-GBS-KOH-4016-10Z) |
| • Kohler Genset Model 20RZ CSG 423 | (P/N: FAB-GBS-KOH-G404Z) |
| • Kohler Genset Model 30RZ CSG 649 | (P/N: FAB-GBS-KOH-G6-05Z) |
| • Kohler Genset Model 35RZ CSG 649 | (P/N: FAB-GBS-KOH-G6-12Z) |
| • Kohler Genset Model 45RZ CSG 649 | (P/N: FAB-GBS-KOH-G6-05Z) |
| • Kohler Genset Model 50/70RZ LSG 875 | (P/N: FAB-GBS-KOH-G8-06Z) |
| • Kohler Genset Model 80/100RZ LSG 875 | (P/N: FAB-GBS-KOH-G8-18Z) |
| • Kohler Genset Model RZG 30/45, 4.3L | (P/N: FAB-GBS-KOH-GM-4.3-07Z) |
| • Kohler Genset Model RZG 50/60, 5.7L Gas | (P/N: FAB-GBS-KOH-GM-5.7-07Z) |
| • Kohler Genset Model RZG 80/100, Vortec 8.1L | (P/N: FAB-GBS-KOH-GM-8.1-10Z) |
| • Kohler Genset Model RZG 125, Vortec 8.1L | (P/N: FAB-GBS-KOH-GM-8.1T-10Z) |
| • Kohler Genset Model REOZJB 20, 3029T | (P/N: FAB-GBS-KOH-J154Z) |
| • Kohler Genset Model REOZJB 20/40, 3029TF150 | (P/N: FAB-GBS-KOH-J165Z) |
| • Kohler Genset Model ROZJ 50/60, 4039T | (P/N: FAB-GBS-KOH-J303Z) |
| • Kohler Genset Model REOZJB 50/60, 4045TF150 | (P/N: FAB-GBS-KOH-J3044Z) |
| • Kohler Genset Model 50 REOZJ 4045TF | (P/N: FAB-GBS-KOH-J306Z) |
| • Kohler Genset Model 60 REOZJ 4045TF | (P/N: FAB-GBS-KOH-J310Z) |
| • Kohler Genset Model REOZJB 80, 4045TF250 | (P/N: FAB-GBS-KOH-J428Z) |
| • Kohler Genset Model ROZJ 80/100, 6059T | (P/N: FAB-GBS-KOH-J514Z) |

- Kohler Genset Model REOZJB 100/150, 6068TF250 (P/N: FAB-GBS-KOH-J604Z)
- Kohler Genset Model REOZJB 150, 6068HF150 (P/N: FAB-GBS-KOH-J624Z)
- Kohler Genset Model 150/180ROZJ 6076A (P/N: FAB-GBS-KOH-J7A04Z)
- Kohler Genset Model 125ROZJ 6076T (P/N: FAB-GBS-KOH-J7T04Z)
- Kohler Genset Model REOZJB 180/230, 6081AF001 (P/N: FAB-GBS-KOH-J804AFZ)
- Kohler Genset Model REOZJC 50, 4024TF285 (P/N: FAB-GBS-KOH-J805Z)
- Kohler Genset Model REOZJC 180, 6068TF250 (P/N: FAB-GBS-KOH-J809Z)
- Kohler Genset Model ROZJ 135, 6081TF (P/N: FAB-GBS-KOH-J814TZ)
- Kohler Genset Model ROEJM 600, S6R-PTA (D600, 24.5A60) (P/N: FAB-GBS-KOH-MITS06R-5Z)
- Kohler Genset Model REOZM 750, S12A2-TA 33.9L (P/N: FAB-GBS-KOH-MITS12-20Z)
- Kohler Genset Model REOZM 900/1000, S12H-PTA (P/N: FAB-GBS-KOH-MITS12-20Z)
- Kohler Genset Model ROZP 50/60, T4.236 (P/N: FAB-GBS-KOH-PKT42-04Z)
- Kohler Genset Model REOZV 200/230, TAD740/741GE (P/N: FAB-GBS-KOH-HV-0740-05Z)
- Kohler Genset Model REOZV 230/250, TAD1030/31GE (P/N: FAB-GBS-KOH-HV-1030-05Z)
- Kohler Genset Model REOZV/C 275/400, TAD1242GE (D350 12.1A65) (P/N: FAB-GBS-KOH-HV-1242-06Z)
- Kohler Genset Model REOZV 500, TAD1631GE (16.1A65) (P/N: FAB-GBS-KOH-HV-1631-05Z)
- Kohler Genset Model REOZVB 500, TAD1641GE (16.1B65) (P/N: FAB-GBS-KOH-HV-1641-09Z)

Kubota Genset Removeable Insulation Blankets

- Kubota Genset Model D1105T (P/N: FAB-GBS-KB-2F-44Z)
- Kubota Genset Model Z482, 2 cylinder (P/N: FAB-GBS-KB-8-04Z)

Olympian Genset Removeable Insulation Blankets

- Olympian Genset Model D100P1/S 100 Kw, Perkins 1006TG2A (P/N: FAB-GBS-OLP-KT62-C041Z)
- Olympian Genset Model D125P1 125 Kw, Perkins 1006TAG (P/N: FAB-GBS-OLP-KT62-F041Z)
- Olympian Genset Model D150P1 150 Kw, Perkins 1006TAG1 (P/N: FAB-GBS-OLP-KT62-G041Z)
- Olympian Genset Model D200P1 200 Kw, Perkins 1306-9TAG1 (P/N: FAB-GBS-OLP-SD40-A04Z)
- Olympian Genset Model D20L1/S 20 Kw, Lister LPWT4 (P/N: FAB-GBS-OLP-LP-LT4-05Z)
- Olympian Genset Model D230P1 230 Kw, Perkins 1306-9TAG3 (P/N: FAB-GBS-OLP-SD40-B04Z)
- Olympian Genset Model D50P1/S 50 Kw, Perkins T4.236 (P/N: FAB-GBS-OLP-PKT42-B04Z)
- Olympian Genset Model D60P1/S 60 Kw, Perkins T4.236 (P/N: FAB-GBS-OLP-PKT42-C04Z)
- Olympian Genset Model D75P1 75 Kw, Perkins 1004TG (P/N: FAB-GBS-OLP-PKT6.5-04Z)
- Olympian Genset Model D75P1 75 Kw, Perkins 1006TGIA (P/N: FAB-GBS-OLP-PKT62-A041Z)
- Olympian Genset Model D90P1/S 90 Kw, Perkins 1006TG1A (P/N: FAB-GBS-OLP-PKT62-B041Z))
- Olympian Genset Model G100F1 100 Kw, Ford LSG875 (P/N: FAB-GBS-OLP-FGSG18-E8Z)
- Olympian Genset Model G20F1/S 20 Kw, Ford LRG425 (P/N: FAB-GBS-OLP-FG04-A04Z)
- Olympian Genset Model G25F1/S 25 Kw, Ford LRG425 (P/N: FAB-GBS-OLP-FG04-B04Z)
- Olympian Genset Model G30F1/S 30 Kw, Ford CSG649 (P/N: FAB-GBS-OLP-FG06-A05Z)
- Olympian Genset Model G35F1S 35 Kw, Ford CSG649 (P/N: FAB-GBS-OLP-FG06-B05Z)
- Olympian Genset Model G40 F1 40 Kw, Ford CSG649 (P/N: FAB-GBS-OLP-FG06-C05Z)
- Olympian Genset Model G45F1/S 45 Kw, Ford CSG649 (P/N: FAB-GBS-OLP-FG06-D05Z)
- Olympian Genset Model G60F1 60 Kw, Ford LSG875 (P/N: FAB-GBS-OLP-FGSG18-B8Z)
- Olympian Genset Model G75F1/S 75 Kw, Ford LSG875 (P/N: FAB-GBS-OLP-FGSG18-C8Z)

Don't See Your Genset? We can still build a set of blankets based on sketches, measurements, photos, drawings, measurements.....

Removable Blanket and Insulation Systems for Selective Catalytic Reduction units (SCR)

1200°F / 648°C

Diesel, Gasoline/Petrol and Natural Gas Piston and Gas Turbine Engines

Standard engine insulation blanket sets for the following engine makes and models are available (The Part Number is the ordering code for the complete set for that engine.)

- | | |
|------------------------------------|------------------------------|
| • Steuler SCR model L8X7/4 | (P/N: FAB-SCR-STE-005-30Z) |
| • Steuler SCR model L8X7/4 | (P/N: FAB-SCR-STE-006-30Z) |
| • Steuler SCR model L8X7/4 | (P/N: FAB-SCR-STE-007-30Z) |
| • Steuler SCR model L7X8/4 | (P/N: FAB-SCR-STE-008-30Z) |
| • Steuler SCR model L8X6/4 | (P/N: FAB-SCR-STE-010-30Z) |
| • Steuler SCR model L10X10/4 +2 | (P/N: FAB-SCR-STE-011-30Z) |
| • Steuler SCR model L6X6 | (P/N: FAB-SCR-STE-013-30Z) |
| • Steuler SCR model L4X6/4+2 | (P/N: FAB-SCR-STE-015-30Z) |
| • Steuler SCR model L8X6/4 | (P/N: FAB-SCR-STE-016-30Z) |
| • Steuler SCR model L8X6/4 | (P/N: FAB-SCR-STE-017-30Z) |
| • Steuler SCR model L10X10/4 +2 | (P/N: FAB-SCR-STE-018-30Z) |
| • Steuler SCR model L10X10/4 +2 | (P/N: FAB-SCR-STE-019-30Z) |
| • Steuler SCR model L8X8/4+2 | (P/N: FAB-SCR-STE-020-30Z) |
| • Steuler SCR model L10X8/4+2 | (P/N: FAB-SCR-STE-022-30Z) |
| • Steuler SCR model L4X6/4+2 | (P/N: FAB-SCR-STE-024-30Z) |
| • Steuler SCR model L6X6/4+3 | (P/N: FAB-SCR-STE-025-30Z) |
| • CAT SCR model GX0049 | (P/N: FAB-SCR-CAT-SCR001) |
| • Cummins SCR model Sinox 2000 8X8 | (P/N: FAB-SCR-ARG10-001-50Z) |
| • Siemens SCR model Sinox 12X12 | (P/N: FAB-SCR-ARG10-003-50Z) |
| • Argillon SCR model Sinox 6X6 | (P/N: FAB-SCR-ARG10-005-50Z) |

Removable Blanket and Insulation Systems for Gas and Diesel Agricultural, Construction & Mining Vehicles

Diesel, Gasoline/Petrol and Natural Gas Piston and Gas Turbine Engines

Standard engine insulation blanket sets for the following engine makes and models are available (The Part Number is the ordering code for the complete set for that engine.)

Atlas Copco Vehicle Engine Removable Insulation Blankets

- Atlas Copco Drill - Boomer 281 Engine Blanket Set (P/N: FAB-VEH-ATCO-BMR281A1-10Z)
- Atlas Copco Drill - Boomer 282 Engine Blanket Set (P/N: FAB-VEH-ATCO-BMR282A3-10Z)
- Atlas Copco Drill - Boomer H-104 Engine Blanket Set (P/N: FAB-VEH-ATCO-BMR-H104A3-9Z)
- Atlas Copco Loader EJC 130 Engine Blanket Set (P/N: FAB-VEH-ATCO-EJC130A3-18Z)
- Atlas Copco Loader 210 Engine Blanket Set (P/N: FAB-VEH-ATCO-EJC210B2-08Z)
- Atlas Copco Loader EJC 210 Engine Blanket Set (P/N: FAB-VEH-ATCO-EJC30SXA3-10Z)
- Atlas Copco Loader - JDT 426 Engine Blanket Set (P/N: FAB-VEH-ATCO-EJC426A2-08Z)
- Atlas Copco Loader - EJC 430 Engine Blanket Set (P/N: FAB-VEH-ATCO-EJC430A3-08Z)
- Atlas Copco Loader - EJC 515 Engine Blanket Set (P/N: FAB-VEH-ATCO-EJC515A3-11Z)
- Atlas Copco Drill - M2 D18 Engine Blanket Set (P/N: FAB-VEH-ATCO-WABM2D18A3-09Z)
- Atlas Copco Bolter Engine Blanket Set (P/N: FAB-VEH-ATCO-WABTMDA3-19Z)

BTI Vehicle Engine Removable Insulation Blankets

- BTI 906 Scaler Engine Blanket Set (P/N: FAB-VEH-BTI-BRK-906-18Z)
- BTI DS25-3 Scaler Engine Blanket Set (P/N: FAB-VEH-BTI-BRK-DS25-12Z)
- BTI TM12X Scaler Engine Blanket Set (P/N: FAB-VEH-BTI-BRK-TM12X-8Z)
- BTI TM15XH Scaler Engine Blanket Set (P/N: FAB-VEH-BTI-BRK-TM15XH-18Z)
- BTI Carrier Engine Blanket Set (P/N: FAB-VEH-BTI-001-8Z)

CASE Vehicle Engine Removable Insulation Blankets

- CASE A45 Grader Engine Blanket Set (P/N: FAB-VEH-CASE-A45A3-10Z)
- CASE 1460 Combine Engine Blanket Set (P/N: FAB-VEH-CASE-1460A-11Z)
- CASE 1680 Combine Engine Blanket Set (P/N: FAB-VEH-CASE-1680A-11Z)
- CASE 1688 Combine Engine Blanket Set (P/N: FAB-VEH-CASE-1688A-11Z)
- CASE 2188 Combine Engine Blanket Set (P/N: FAB-VEH-CASE-2188A-11Z)
- CASE 2388 Combine Engine Blanket Set (P/N: FAB-VEH-CASE-2388A-11Z)
- CASE 2388 Combine Engine Blanket Set (P/N: FAB-VEH-CASE-2388B-11Z)

Caterpillar CAT Vehicle Engine Removable Insulation Blankets

- Caterpillar CAT 301.8C Excavator Engine Blanket Set (P/N: FAB-VEH-CAT-301.8C-02Z)
- Caterpillar CAT M120 Grader Engine Blanket Set (P/N: FAB-VEH-CAT-0120A1-4Z)
- Caterpillar CAT 930G Loader Engine Blanket Set (P/N: FAB-VEH-CAT-0930A3-8Z)
- Caterpillar CAT D5C Dozer Engine Blanket Set (P/N: FAB-VEH-CAT-0D5CA3-8Z)
- Caterpillar CAT 321C Excavator Engine Blanket Set (P/N: FAB-VEH-CAT-CATE090-8Z)
- Caterpillar CAT 918F Loader Engine Blanket Set (P/N: FAB-VEH-CAT-CATE-124Z)
- Caterpillar CAT 924F Loader Engine Blanket Set (P/N: FAB-VEH-CAT-CATE-134Z)
- Caterpillar CAT 980C Loader Engine Blanket Set (P/N: FAB-VEH-CAT-CATE168Z)
- Caterpillar CAT 236 Loader Engine Blanket Set (P/N: FAB-VEH-CAT-CATE214Z)
- Caterpillar CAT 908 Engine Blanket Set (P/N: FAB-VEH-CAT-908Z)
- Caterpillar CAT 420EIT Engine Blanket Set (P/N: FAB-VEH-CAT-420Z)
- Caterpillar CAT 3406 Engine Blanket Set (P/N: FAB-VEH-CAT-219-5Z)

Cubex Vehicle Engine Removable Insulation Blankets

- Cubex Orion Drill Engine Blanket Set (P/N: FAB-VEH-CUB-10A3-001Z)
- Cubex Pegasus Drill Engine Blanket Set (P/N: FAB-VEH-CUB-10A3-002Z)
- Cubex 6200D Drill Engine Blanket Set (P/N: FAB-VEH-CUB-6200D-A3-8Z)
- Cubex Aries Drill Engine Blanket Set (P/N: FAB-VEH-CUB-ARIE-A3-9Z)

Dodge Vehicle Engine Removable Insulation Blankets

- Dodge Truck 6CT5.9TR Engine Blanket Set (P/N: FAB-VEH-DOD-121-04Z)

Getman Vehicle Engine Removable Insulation Blankets

- Getman Truck Engine Blanket Set (P/N: FAB-VEH-GET-001A3-18Z)

Jarvis Clarke Vehicle Engine Removable Insulation Blankets

- Jarvis Clarke Scissor Lift 41SL Engine Blanket Set (P/N: FAB-VEH-JAC-41SL-D3-9Z)
- Jarvis Clarke Scissor Lift 43SL Engine Blanket Set (P/N: FAB-VEH-JAC-43SL-A3-9Z)
- Jarvis Clarke Scoop JS350 Engine Blanket Set (P/N: FAB-VEH-JAC-JS350A2-9Z)

John Deere Vehicle Engine Removable Insulation Blankets

- John Deere Combine 9500/9550 Engine Blanket Set (P/N: FAB-VEH-JD-C9550-9Z)
- John Deere Combine 9600/9610 Engine Blanket Set (P/N: FAB-VEH-JD-C9550-9Z)
- John Deere Combine 9650/9750 Engine Blanket Set (P/N: FAB-VEH-JD-C9750-9Z)
- John Deere Excavator 160 Engine Blanket Set (P/N: FAB-VEH-JD-E554Z)
- John Deere Excavator 200LC Engine Blanket Set (P/N: FAB-VEH-JD-E604Z)
- John Deere Timberjack 608 Engine Blanket Set (P/N: FAB-VEH-JD-E629Z)
- John Deere Timberjack 850 Engine Blanket Set (P/N: FAB-VEH-JD-E649Z)
- John Deere Skid Steer 328/332 Engine Blanket Set (P/N: FAB-VEH-JD-E669Z)
- John Deere Tractor 5425 Engine Blanket Set (P/N: FAB-VEH-JD-5425A3-18Z)
- John Deere Grader 670D Engine Blanket Set (P/N: FAB-VEH-JD-670DA3-11Z)

Komatsu Vehicle Engine Removable Insulation Blankets

- Komatsu Truck model EJ2068 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ2068)
- Komatsu Truck model EJ2069 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ2069)
- Komatsu Truck model EJ2070 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ2070)
- Komatsu Truck model EJ2071 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ2071)
- Komatsu Truck model EJ3257 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3257)
- Komatsu Truck model EJ3258 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3258)
- Komatsu Truck model EJ3259 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3259)
- Komatsu Truck model EJ3260 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3260)
- Komatsu Truck model EJ3261 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3261)
- Komatsu Truck model EJ3262 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3262)
- Komatsu Truck model EJ3309 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3309)
- Komatsu Truck model EJ3310 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3310)
- Komatsu Truck model EJ3311 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3311)
- Komatsu Truck model EJ3314 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3314)
- Komatsu Truck model EJ3318 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3318)
- Komatsu Truck model EJ3338 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3338)
- Komatsu Truck model EJ3341 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3341)
- Komatsu Truck model EJ3342 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3342)
- Komatsu Truck model EJ3343 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3343)
- Komatsu Truck model EJ3397 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3397)
- Komatsu Truck model EJ3400 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3400)
- Komatsu Truck model EJ3401 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3401)
- Komatsu Truck model EJ3419 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3419)
- Komatsu Truck model EJ3422 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3422)
- Komatsu Truck model EJ3423 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3423)
- Komatsu Truck model EJ3424 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3424)
- Komatsu Truck model EJ3434 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3434)
- Komatsu Truck model EJ3437 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3437)
- Komatsu Truck model EJ3438 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3438)
- Komatsu Truck model EJ3439 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3439)

- Komatsu Truck model EJ3497 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3497)
- Komatsu Truck model EJ3502 Engine Blanket Set (P/N: FAB-VEH-KOM-EJ3502)
- Komatsu Truck model PB9713 Engine Blanket Set (P/N: FAB-VEH-KOM-PB9713)
- Komatsu Truck model PC228 Engine Blanket Set (P/N: FAB-VEH-KOM-PC228-18Z)

MACK Vehicle Engine Removable Insulation Blankets

- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1010)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1015)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1020)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1025)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1026)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1027)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1030)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1035)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1036)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1036)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1040)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1045)
- MACK Truck model MR688S Engine Blanket Set (P/N: FAB-VEH-MACK-1050)

Maclean Vehicle Engine Removable Insulation Blankets

- Maclean Bolter model 1013 Engine Blanket Set (P/N: FAB-VEH-MCL-1013A3-20Z)
- Maclean Bolter model 928 Engine Blanket Set (P/N: FAB-VEH-MCL-928AS-10Z)
- Maclean Bolter model 933 Engine Blanket Set (P/N: FAB-VEH-MCL-922A3-12Z)
- Maclean Carrier model 944 Engine Blanket Set (P/N: FAB-VEH-MCL-944A3-12Z)
- Maclean Boom model 966-011 Engine Blanket Set (P/N: FAB-VEH-MCL-966AS-10Z)
- Maclean Cherry Picker model 969 Engine Blanket Set (P/N: FAB-VEH-MCL-969AHD-9Z)
- Maclean Utility model 977 Engine Blanket Set (P/N: FAB-VEH-MCL-977AS-10Z)
- Maclean Utility model 993 Engine Blanket Set (P/N: FAB-VEH-MCL-993A3-10Z)
- Maclean Bolter model M40 Engine Blanket Set (P/N: FAB-VEH-MCL-M40A3-12Z)
- Maclean Personnel Carrier model PC3-003 Engine Blanket Set (P/N: FAB-VEH-MCL-PC3-A3-10Z)

Marcotte Vehicle Engine Removable Insulation Blankets

- Marcotte Boom Engine Blanket Set (P/N: FAB-VEH-MAR-14A3-10Z)
- Marcotte Fuel Truck Engine Blanket Set (P/N: FAB-VEH-MAR-F8LA3-10Z)
- Marcotte Cement Truck Engine Blanket Set (P/N: FAB-VEH-MAR-F8LC3-10Z)
- Marcotte Loader model Anfo Engine Blanket Set (P/N: FAB-VEH-MAR-C0555A3-9Z)
- Marcotte Carrier model M10 Engine Blanket Set (P/N: FAB-VEH-MAR-C0M10A3-08Z)
- Marcotte Carrier model M30 Engine Blanket Set (P/N: FAB-VEH-MAR-C0M30A3-16Z)
- Marcotte Carrier model M35 Engine Blanket Set (P/N: FAB-VEH-MAR-C0M35A3-16Z)
- Marcotte Carrier model M40 Engine Blanket Set (P/N: FAB-VEH-MAR-C0M40A3-9Z)
- Marcotte Scissor Lift Engine Blanket Set (P/N: FAB-VEH-MAR-C0SLIFTA3-12Z)
- Marcotte Powder Truck Engine Blanket Set (P/N: FAB-VEH-MAR-PDRA3-9Z)

Miller Vehicle Engine Removable Insulation Blankets

- Miller Bolter Engine Blanket Set (P/N: FAB-VEH-MIL-LBTR304A3-09Z)
- Miller Haulage Truck model DT1604 Engine Blanket Set (P/N: FAB-VEH-MIL-TDT1604BRA-8Z)
- Miller Haulage Truck model DT3004 Engine Blanket Set (P/N: FAB-VEH-MIL-TIDT3004A3-8Z)

Mine Jack Vehicle Engine Removable Insulation Blankets

- Mine Jack Carrier model M60A Engine Blanket Set (P/N: FAB-VEH-MJ-M60A-A1-9Z)

Mixmaster Vehicle Engine Removable Insulation Blankets

- Mixmaster Truck Engine Blanket Set (P/N: FAB-VEH-MIX-RDH10-001-10Z)

MTI Vehicle Engine Removable Insulation Blankets

- MTI Scoop model JCI 125 Engine Blanket Set (P/N: FAB-VEH-MTI-JCI125A3-8Z)
- MTI Drill model Tunnel Runner Engine Blanket Set (P/N: FAB-VEH-MTI-JUMC3-14Z)
- MTI Drill model Vein Runner Engine Blanket Set (P/N: FAB-VEH-MTI-JUMD2-14Z)
- MTI Scoop model LT-70 Engine Blanket Set (P/N: FAB-VEH-MTI-LT070A3-11Z)
- MTI Scoop model LT-270 Engine Blanket Set (P/N: FAB-VEH-MTI-LT270D2-8Z)
- MTI Loader model LT-350 Engine Blanket Set (P/N: FAB-VEH-MTI-LT350A3-18Z)
- MTI Loader model LT-650 Engine Blanket Set (P/N: FAB-VEH-MTI-LT650B2-10Z)
- MTI Stope Runner model SR 360Y Engine Blanket Set (P/N: FAB-VEH-MTI-SR360A3-10Z)
- MTI Loader model LT-1050 Engine Blanket Set (P/N: FAB-VEH-MTI-LT-1050A2-9Z)

New Holland Vehicle Engine Removable Insulation Blankets

- New Holland Combine model TR97 Engine Blanket Set (P/N: FAB-VEH-NH-TR97A-9Z)

Norment Vehicle Engine Removable Insulation Blankets

- Norment model 871 Engine Blanket Set (P/N: FAB-VEH-NOR-871A3-12Z)

Omega Vehicle Engine Removable Insulation Blankets

- Omega model UG44T Engine Blanket Set (P/N: FAB-VEH-OM-UG44TA3-11Z)

REG Vehicle Engine Removable Insulation Blankets

- REG Locomotive Engine Blanket Set (P/N: FAB-VEH-REG-001A3-8Z)

Robbins Rasiebore Vehicle Engine Removable Insulation Blankets

- Robbins Rasiebore Truck Engine Blanket Set (P/N: FAB-VEH-ROB-001A3-18Z)

Tamrock Vehicle Engine Removable Insulation Blankets

- Tamrock Rockbolt model 7 Engine Blanket Set (P/N: FAB-VEH-TAM-007A1-9Z)

Toro Vehicle Engine Removable Insulation Blankets

- Toro Truck model 40D Engine Blanket Set (P/N: FAB-VEH-TOR-0040A-08Z)
- Toro Scoop model 210 Engine Blanket Set (P/N: FAB-VEH-TOR-0210A3-10Z)
- Toro Loader model 400 Engine Blanket Set (P/N: FAB-VEH-TOR-0400A3-9Z)
- Toro Loader model 430 Engine Blanket Set (P/N: FAB-VEH-TOR-0430A3-9Z)
- Toro Loader model 501 Engine Blanket Set (P/N: FAB-VEH-TOR-0501A3-9Z)
- Toro Loader model 650D Engine Blanket Set (P/N: FAB-VEH-TOR-0650A1-12Z)
- Toro Loader model 1400 Engine Blanket Set (P/N: FAB-VEH-TOR-1400ARA-8Z)

Volvo Vehicle Engine Removable Insulation Blankets

- Volvo Loader model L220E Engine Blanket Set (P/N: FAB-VEH-VOL-220LEA3-09Z)

Wagner Vehicle Engine Removable Insulation Blankets

- Wagner Truck model MT426 Engine Blanket Set (P/N: FAB-VEH-WAG-0426C3-18Z)
- Wagner Truck model MT444 Engine Blanket Set (P/N: FAB-VEH-WAG-0444B3-08Z)
- Wagner Truck model MT2000 Engine Blanket Set (P/N: FAB-VEH-WAG-MT2000A3-9Z)
- Wagner Truck model MT416 Engine Blanket Set (P/N: FAB-VEH-WAG-MT416A3-9Z)
- Wagner Truck model MT426 Engine Blanket Set (P/N: FAB-VEH-WAG-MT426B3-9Z)
- Wagner Truck model MT433 Engine Blanket Set (P/N: FAB-VEH-WAG-MT433A2-9Z)
- Wagner Truck model MT436 Engine Blanket Set (P/N: FAB-VEH-WAG-MT436A3-12Z)

- | | |
|---|---------------------------------|
| • Wagner Truck model MT439 Engine Blanket Set | (P/N: FAB-VEH-WAG-MT439A3-12Z) |
| • Wagner Truck model MT5010 Engine Blanket Set | (P/N: FAB-VEH-WAG-MT5010A2-18Z) |
| • Wagner Scoop model ST1010 Engine Blanket Set | (P/N: FAB-VEH-WAG-ST1010A3-09Z) |
| • Wagner Scoop model ST1020 Engine Blanket Set | (P/N: FAB-VEH-WAG-ST1020A3-09Z) |
| • Wagner Scoop model ST1030 Engine Blanket Set | (P/N: FAB-VEH-WAG-ST1030A3-11Z) |
| • Wagner Loader model ST14 Engine Blanket Set | (P/N: FAB-VEH-WAG-ST14A3-8Z) |
| • Wagner Loader model ST1510 Engine Blanket Set | (P/N: FAB-VEH-WAG-ST1510A1-8Z) |
| • Wagner Scoop model ST2G Engine Blanket Set | (P/N: FAB-VEH-WAG-ST2GA3-8Z) |
| • Wagner Scoop model ST3.5 Engine Blanket Set | (P/N: FAB-VEH-WAG-ST3.5A3-18Z) |
| • Wagner Scoop model ST6C Engine Blanket Set | (P/N: FAB-VEH-WAG-ST6CA3-9Z) |
| • Wagner Scoop model ST7.5 Engine Blanket Set | (P/N: FAB-VEH-WAG-ST7.5A3-8Z) |
| • Wagner Scoop model ST700 Engine Blanket Set | (P/N: FAB-VEH-WAG-ST700A3-09Z) |
| • Wagner Scoop model ST8B Engine Blanket Set | (P/N: FAB-VEH-WAG-ST8BB3-8Z) |

Wajax Vehicle Engine Removable Insulation Blankets

- | | |
|---|--------------------------|
| • Wajax Backhoe model EX2500 Engine Blanket Set | (P/N: FAB-VEH-WAJ-2500Z) |
| • Wajax Shovel model EX5500 Engine Blanket Set | (P/N: FAB-VEH-WAJ-5500Z) |


Don't See Your Vehicle? We can still build a set of blankets based on sketches, measurements, photos, drawings, measurements.....

Quote Request Forms for Engine Component Insulation Blankets

General Overview & Dimensions




EXHAUST SYSTEM DRAWING

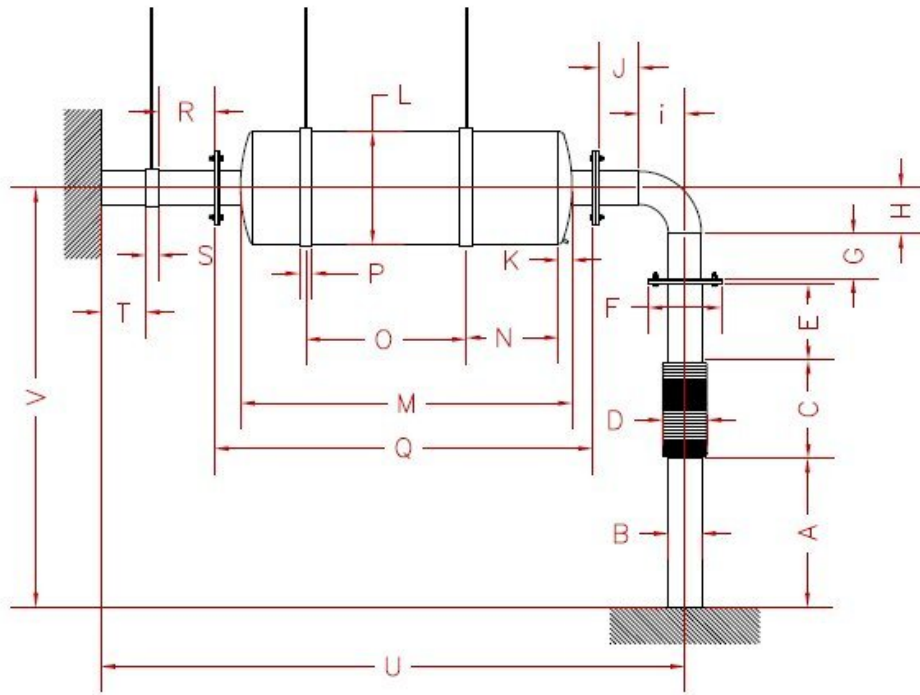


1. MAKE AND MODEL OF SILENCER? IS IT A SIDE INLET OR STRAIGHT THROUGH DESIGN?
2. IS THERE A DRAIN OR SPARK ARRESTOR ON THE SILENCER? LOCATE ON DRAWING.
3. LOCATE ALL HANGERS AND SUPPORTS ON DRAWING

A	
B	
C	
D	
E	
F	
G	
H	
I	
J	
K	
L	
M	
N	
O	
P	
Q	
R	
S	
T	
U	
V	
W	
X	
Y	
Z	

PLEASE CIRCLE PIPE HANGER/SUPPORT BELOW



PLEASE CIRCLE SILENCER HANGER/SUPPORT BELOW

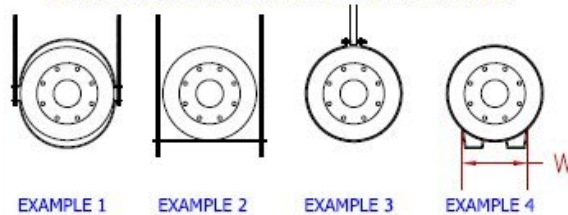


Notes: _____

Your Email Address: _____ Phone: _____
Name: _____

Muffler / Silencer Dimensions Form for Insulation Blankets

REQUIRED SILENCER INFORMATION

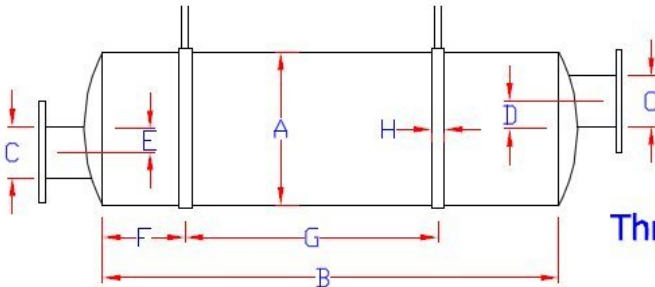


Through Inlet/Outlet

ALL SILENCER VERSIONS

A	Ø	
B	Weld to weld length	
C	Inlet/outlet OD	
D	Outlet offset (0 if N/A)	

THRU INLET/OUTLET VERSION ONLY

E	Inlet offset (0 if N/A)	
F	Support 1 Offset (if applicable)	
G	Support 2 Offset (if applicable)	
H	Support Width	

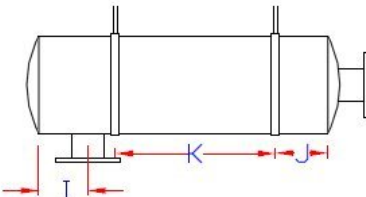


Side Inlet

SIDE INLET VERSION ONLY

I	Inlet offset	
J	Support 1 Offset (if applicable)	
K	Support 2 Offset (if applicable)	

Muffler / Silencer Support Type and Bracket Location Dimensions

TYPICAL SILENCER HANGER/SUPPORT DRAWING

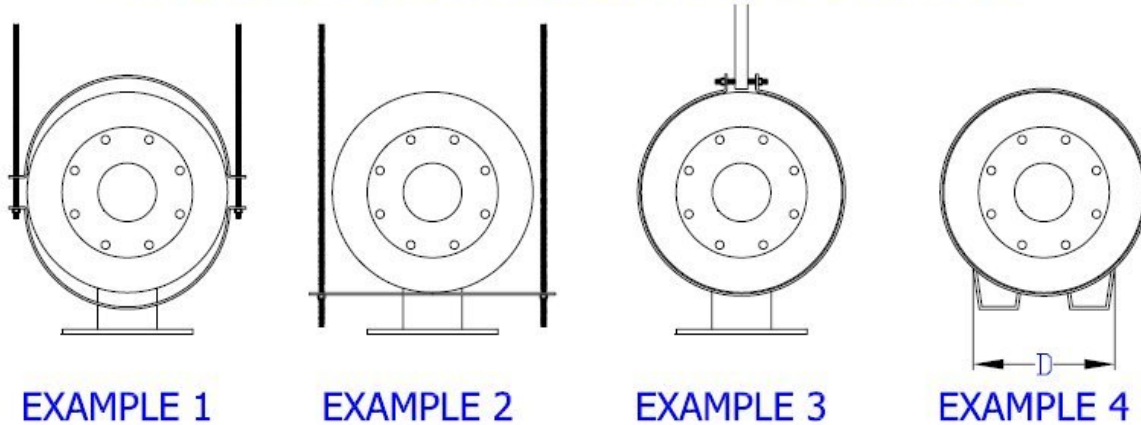


Please indicate the relevant support system.

Example of dimensions required to locate brackets

Through Inlet/Outlet

A	
B	
C	
D	

Side Inlet

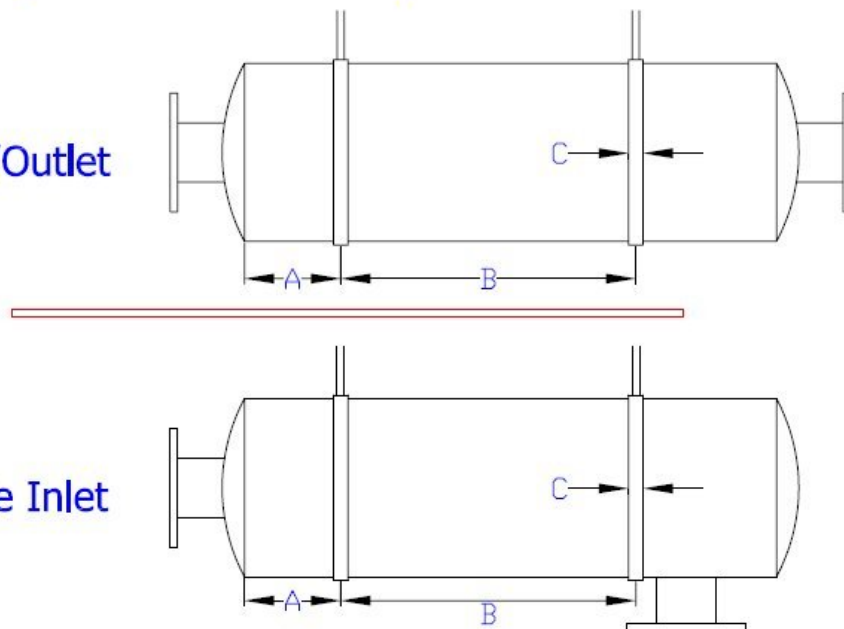

Flex, Flange and Elbow Dimensions for Insulation Blankets

REQUIRED INFORMATION FOR FLEXES, FLANGES, AND ELBOWS


FLEX AND FLANGES

FLEXES

A	OD	
B	LENGTH	


FLANGES

C	OD	
D	Flange Width	

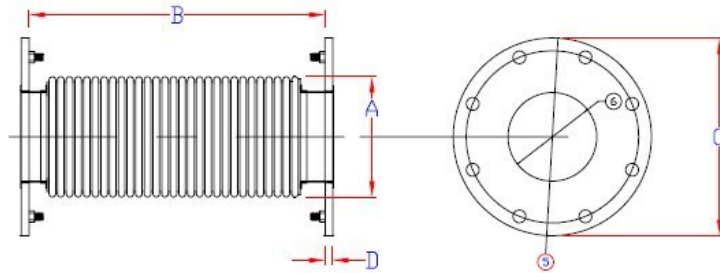


90° ELBOWS

A	OD	
B	Radius Length	
C	Extension 1	
D	Extension 2	



MISCILANEOUS ELBOWS

A	OD	
B	Angle (if known)	
C	Outer Arc Length	
D	Inner Arc Length	



Turbo Charger Dimension Form for Insulation Blankets

AB Technology Group
info@abthermal.com
Fax 610-340-9054

ENGINE MAKE: _____
ENGINE MODEL: _____

1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	

The diagram illustrates the dimensions of a turbocharger for insulation blanket application. The front view (top) shows the inlet and outlet ports with dimensions 1 through 15. The side view (bottom) shows the overall profile with dimensions 1 through 15. The dimensions are as follows:

- 1: Overall height of the turbocharger housing.
- 2: Height of the inlet port flange.
- 3: Height of the outlet port flange.
- 4: Height of the inlet port opening.
- 5: Overall width of the turbocharger housing.
- 6: Width of the inlet port flange.
- 7: Width of the outlet port flange.
- 8: Width of the inlet port opening.
- 9: Overall width of the turbocharger housing.
- 10: Overall length of the turbocharger housing.
- 11: Length of the inlet port flange.
- 12: Length of the outlet port flange.
- 13: Length of the inlet port opening.
- 14: Length of the outlet port opening.
- 15: Length of the inlet port opening.



Thermal, EMI/RFI & Abrasion Protection Materials

Fax Orders: 610-340-9054 Telephone Orders: 610-906-3549 orders@abthermal.com

Fire Protection Removable Blanket and Shield Insulation Systems for Mine Equipment Engine Exhaust Components:

1200°F / 648°C ExhaustGuard™ For Mufflers, Silencers, Turbo Chargers, Elbows, Flex Pipes, Straight Pipes and Flanges




- Provides fire protection from fluid leaks and burst fuel and oil lines from contacting hot engine exhaust components.
- Two versions: ExhaustGuard Mine and MineXT. Mine version has a stainless inner liner to help prevent fluids from soaking the insulation layer. MineXT provides a stainless mesh outer cover to protect the outer fabric layer from tears and punctures.
- Meets MIL-I-24222; USCG 164.009; ASTM E84; UL 2200.
- Suitable for gasoline & diesel reciprocating engines.
- Custom made to form fit components.



- Removable blanket sections are assembled with either locking wire or spring clips connecting the hook fasteners that are mounted on the blankets.
- Collar system helps to prevent liquids from entering section gaps.
- Provides OSHA compliant accidental contact burn protection for personnel.



**Removable Insulation Covers for
Industrial / Marine Valves and Piping – Indoor and Outdoor
Heat Loss / Heat Gain / Freeze Protection for Ball / Butterfly /
Gate Valves / Piping and Heat Exchangers**

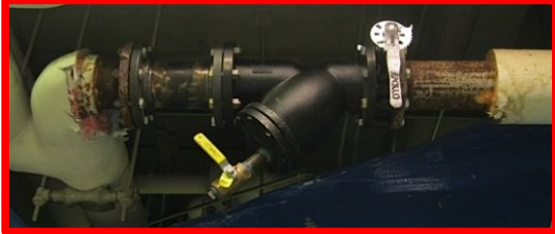


Custom fabricated removable insulation systems provide personnel protection, heat loss & heat gain protection, freeze protection. For heat loss and heat gain, energy savings payback is typically measured in months.

Various heat tapes with settable or fixed thermostat control are available for valve freeze protection covers. Outdoor covers feature hydrophobic insulation.

Blow-Out / Spray Protection Shields for Valves & Pipe Flanges

Blow-Out & Spray Protection Shields protect personnel and equipment from high pressure spray from failed gaskets and seals.

Reduces risk of injury.

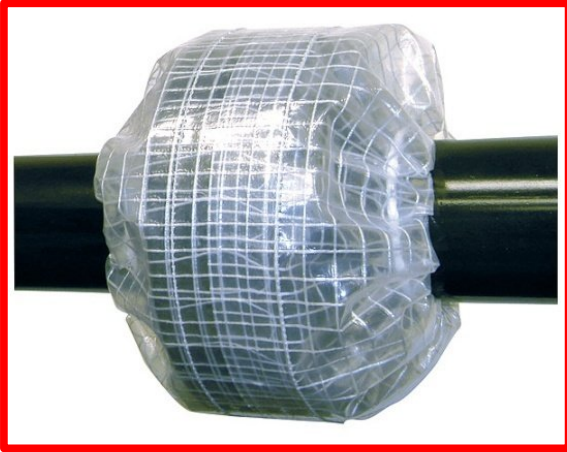

- Available in three versions:
 - 1) Ballistic Woven Nylon with polyurethane coating.
 - 2) High temperature ptfe coated fibreglass.
 - 3) Pure ptfe sheet.
- Pure ptfe sheet has greatest chemical compatibility range from ph 1 to 14. Temperature range -100°F to +550°F. FDA Approved. Translucent allows for easy visual inspection.
- Fiberglass coated with ptfe version for excellent chemical resistance.
- Nylon version meets EN982 ISO norm 833 & EN414 for hose blowout operator protection. Exceeds ISO 6945 abrasion standard and ISO 8031 conductivity standard.
- Easily installed and easily removed to allow for maintenance and inspection.
- Custom manufactured for any valve/flange size.
- Call for pricing.
- Part Number FAB-FSS-X-Y
"X" is the ANSI Flange size
"Y" is the material;
N for Nylon
PFG for PTFE coated fibreglass
PP for Pure PTFE

Steel and Metal Processing Plant Custom Fabrications

Festoon Protection Jacket Covers



Power Track Protection Jacket Systems



Bellows for Protecting Lift Cylinders



Heated Removable Insulation Covers for Gas Cylinders General Use and CSA Hazardous Area Approved (Class I, Division 1)



- Improves process control and reduces wasted condensed gas.
- Increases pressure.
- CSA rated for Class I Div 1, Groups B, C and D.
- Fits most gas cylinders.
- Self regulating 150 watts of heating.
- 2 inch side insulation; 0.5" top insulation.
- 10 foot power lead.
- Particularly useful for Propane, Nitrogen, Oxygen, SF6, BCl3, WF6 and HF gases.

ThermaCover™ Gas Cylinder Heaters – CSA Approved Hazardous Areas		
Part Number	Size inch / mm	Voltage
FAB-GCH-HCW-8480-X	8 x 48 / 203 x 1219	120 / 240
FAB-GCH-HCW-951-X	9 x 51 / 229 x 1295	120 / 240
FAB-GCH-HCW-1047-X	10 x 47 / 254 x 1194	120 / 240
FAB-GCH-HCW-1543-X	15 x 43 / 381 x 1092	120 / 240

For the X value, specify "120" for 120 volt or "240" for 220-240 volt operation

ThermaCover™ Gas Cylinder Heaters – General Use Areas		
Part Number	Size inch / mm	Voltage
FAB-GCH-GCW-8480-X	8 x 48 / 203 x 1219	120 / 240
FAB-GCH-GCW-951-X	9 x 51 / 229 x 1295	120 / 240
FAB-GCH-GCW-1543-X	15 x 43 / 381 x 1092	120 / 240

For the X value, specify "120" for 120 volt or "240" for 220-240 volt operation

Other sizes and designs available

Heated Removable Insulation Covers and Heating Pads for Industrial Bulk Container Tote Tanks / Intermediate Bulk Containers



Heated Cover

- Helps speed the flow of high viscosity fluids such as oils, lubes, foods.
- Provides freeze protection.
- Does not contaminate or scorch product.
- Separate heat zones allows heat adjustment when the level lowers.
- Fits any tote tank from 40" (1016mm) x 40" (1016mm) to 48" (1219mm) x 48" (1219mm)
- Three standard heights: 36" (914mm), 42" (1067mm), 48" (1220mm)
- Adjustable thermostat 50° to 160°F
- Hi temperature safety cutoff at 195°F (91°C) for each zone
- Silicone rubber fabric resists contamination. Insulation layer ¼" thick
- Meets NEC 427.23 for ground safety.
- Wattage: 120VAC; 1440 watts / 240VAC; 2880 watts
- Optional insulated top cover for increased thermal protection.

Heating Pad

- Heating Pad Wattage: 120VAC 1600 watts / 240VAC 3240watts

ThermaCover™ Heated Insulation Covers & Heater Pads for Totes		
Part Number	Size inch / mm	Voltage
FAB-TOTE-36-X	36" / 914mm height	120 / 240
FAB-TOTE-42-X	42" / 1067mm height	120 / 240
FAB-TOTE-48-X	48" / 1220mm height	120 / 240
FAB-TOTE-COVER		
FAB-TOTE-PAD-X	32" x 36" / 813mm x 914mm	120 / 240

For the X value, specify "120" for 120 volt or "240" for 220-240 volt operation

55 & 30 Gallon Drum Insulated Covers 55 Gallon Drum Insulated Covers with Heaters



- Helps speed the flow of high viscosity fluids such as oils, lubes, foods.
- Provides freeze protection.
- Does not contaminate or scorch product.
- Dual heat zone version.
- Adjustable thermostat 50 to 160F
- Wattage:
55 gallon metal drums: 1600 watts
55 gallon metal drums with dual zone: 3200 watts
55 gallon poly drums: 770 watts
- Optional insulated top cover for increased thermal protection.
- High Temperature Silicone Rubber Coated Fiberglass Fabric with 1" thick fiberglass insulation.
- Designed for Indoor use.

ThermaCover™ Drum Insulated Covers	
Part Number	Size inch / mm
FAB-DIN-55	55 gallon (208 litre)
FAB-DIN-30	30 gallon (114 litre)
FAB-DIN-TC55	Top Cover for 55 gallon drum

ThermaCover™ Drum Insulated Covers with Heaters		
Part Number	Size inch / mm	Voltage
FAB-DIN-55MET-X	55 gallon / 1600 watt	120/240
FAB-DIN-55MET-DUAL	55 gallon / 3200 watt dual zone	240
FAB-DIN-55POLY-X	770 watt	120/240

For the X value, specify "120" for 120 volt or "240" for 220-240 volt operation

UltraFlex™ Silicone Rubber Pipe & Hose Heating Tape

Fixed Thermostat Control

Freeze protection and general process heating - 120 & 240 Volt



- Two temperature versions available: 70°F/21°C or 120°F/49°C.
- 6.0 watts/square inch
- Extremely flexible silicone rubber heater strip.
- Moisture and chemical resistant. IP66 rating.
- Safe for use on metal surfaces.
- Multi-strand resistance element for mechanical durability.
- Heater strip maximum exposure 450°F 232°C.
- 5 foot 1.8m power cord with 2 prong plug for 120VAC. Bare wire pigtail for 240VAC.
- Custom temperature setting and lengths available.

UltraFlex™ Pipe & Hose Heating Tapes - Fixed Thermostat			
Part Number	Size of heat tape width / length	Voltage	Watts
FAB-SR-UFTRACE-0510-X-Y	0.50" / 10 ft	120 / 240	60
FAB-SR-UFTRACE-0520-X-Y	0.50" / 20 ft	120 / 240	120
FAB-SR-UFTRACE-0540-X-Y	0.50" / 40 ft	120 / 240	240
FAB-SR-UFTRACE-0550-X-Y	0.50" / 50 ft	120 / 240	300
FAB-SR-UFTRACE-0560-X-Y	0.50" / 60 ft	120 / 240	360
FAB-SR-UFTRACE-0575-X-Y	0.50" / 75 ft	120 / 240	450
FAB-SR-UFTRACE-0580-X-Y	0.50" / 80 ft	120 / 240	480
FAB-SR-UFTRACE-05100-X-Y	0.50" / 100 ft	120 / 240	600
FAB-SR-UFTRACE-05125-X-Y	0.50" / 125 ft	120 / 240	750

For the X value, specify "120" for 120 volt or "240" for 220-240 volt operation

For the Y value, specify "70" for 70°F setting or "120" for 120°F setting

FreezeFlow™ Pipe & Hose Heating Tapes - Thermostat Controlled

Freeze protection and general process heating - 120 & 240 Volt



- Adjustable thermostat controlled heating.
- Adjustable to a maximum of 160°F / 71°C. 6.0 watts/square inch
- Extremely flexible silicone rubber heater strip.
- Moisture and chemical resistant. IP54 rating.
- Safe for use on metal surfaces.
- Multi-strand resistance element for mechanical durability.
- Heater strip maximum exposure 450°F 232°C.
- 6 foot 1.8m power cord with 2 prong plug for 120VAC. Bare wire pigtail for 240VAC.

FreezeFlow™ Pipe Heating Tapes - Thermostat Controlled			
Part Number	Size of heat tape width / length	Voltage	Watts
FAB-SR-TRACE-102-X	1" / 2 ft	120 / 240	144
FAB-SR-TRACE-104-X	1" / 4 ft	120 / 240	288
FAB-SR-TRACE-106-X	1" / 6 ft	120 / 240	432
FAB-SR-TRACE-108-X	1" / 8 ft	120 / 240	576
FAB-SR-TRACE-110-X	1" / 10 ft	120 / 240	720
FAB-SR-TRACE-115-X	1" / 15 ft	120 / 240	1080
FAB-SR-TRACE-120-X	1" / 20 ft	120 / 240	1200
FAB-SR-TRACE-130-X	1" / 30 ft	120 / 240	1440
FAB-SR-TRACE-140-X	1" / 40 ft	120 / 240	1440
FAB-SR-TRACE-150-X	1" / 50 ft	120 / 240	1440

For the X value, specify "120" for 120 volt or "240" for 220-240 volt operation

Thermal Insulated Equipment Covers

500°F / 260°C: EcoTherm-Blanket™ For Lab Ovens, Process Equipment, Test Equipment, Control Equipment



Photo shows cross section of construction method.

- Helps keep heat in or out.
- Saves energy.
- Silicone rubber coated fabric on both sides resists contamination. Insulation layer can be ¼, 1/2 or 1" thick. Thicker available. PTFE coated fabric is also available
- Insulation is totally encased and prevented from movement by quilted sewing pattern.
- Other inner and outer fabric types available, such as PTFE coated, Aluminized PET Film coated.
- Variety of openings and access flaps available for exhaust gas, cooling flow, conduit, control panels, switches or valves.
- Can be sewn together to fit over or around equipment - or assembled in panels with snaps, zippers, straps, turnbuckles, hook and loop, etc.
- Silicone Fabric can be supplied in Industrial grade, or to meet MIL-I-24244, UL 214, NFPA 701, or NRC Guide 1.36 for flame, fire or smoke ratings.
- Silicone coated fabric available in standard weight of 17.5 oz/sq/yd or Heavy Duty 32 oz/sq/yd fabric.

For a quotation, please supply a sketch, dimensions, drawing or photo

Part Number will be FAB-ECSP-XXXX

**Robotic Covers – Thermal Heat Process Protective; Welding
Splatter/Slag and Grinding Spark and Debris Protective; Food
Processing and Handling FDA Approved
Custom Fitted**



- Using a variety of outer fabrics, provides protection from heat, flame, weld splatter, slag, grinding spark and debris, fumes.
- FDA Approved materials for food processing and handling applications.
- Full rotational collars at strategic locations provides for full mobility.

Please Contact Us For Details

Steam Trap Jackets – Easy Energy Savings



- Removeable to allow inspection.
- Energy savings – fast ROI.
- Pocket for asset tag.
- Suitable for Inverted Bucket, F&T (Float & Thermostatic), Orifice Traps, Float.
- Not suitable for Thermostatic (Balanced Pressure/Bimetallic), Thermodynamic.
- Custom sizes available – please supply dimensions, model number, photo, etc. For a quote

SteamSaver™ Steam Trap Jackets Inverted Bucket Style and F&T Trap			
Part Number	Size	Manufacturer	Model Number
Inverted Bucket Style			
FAB-STJ-060905	6" x 9" x 5"	Armstrong	1810 / 1811 / 1822
FAB-STJ-080905	8" x 6" x 5"	Armstrong	800 / 811 / 880 / 881
FAB-STJ-080905	8" x 6" x 5"	Hoffman	B0 Series
FAB-STJ-080905	8" x 6" x 5"	Spence / Nicholson	80S / 81S FTN 250 / FTN 251
FAB-STJ-1057265	10.5" x 7.25" x 6.5"	Armstrong	812 / 882
FAB-STJ-1057265	10.5" x 7.25" x 6.5"	Hoffman	B1 Series
FAB-STJ-1057265	10.5" x 7.25" x 6.5"	Spence / Nicholson	82S
FAB-STJ-130975	13" x 9" x 7.5"	Armstrong	813 / 883
FAB-STJ-130975	13" x 9" x 7.5"	Hoffman	B2 Series
F&T Trap Style			
FAB-STJ-67565725	6.75" x 6.5" x 7.25"	Armstrong	B Series
FAB-STJ-67565725	6.75" x 6.5" x 7.25"	Hoffman	FT015H thru 175H FT015H thru 030H Model 55
FAB-STJ-67565725	6.75" x 6.5" x 7.25"	Spirax Sarco	FT15 thru FT125
FAB-STJ-67565725	6.75" x 6.5" x 7.25"	Mepco / Dunham Bush	40-215 / 40-415 / 40-515
FAB-STJ-67565725	6.75" x 6.5" x 7.25"	Spence / Nicholson	FTN-15 thru FTN-30
FAB-STJ-750555	7.5" x 5" x 5.5"	Barnes & Jones	41-T / 42-T
FAB-STJ-1057555	10.5" x 7.5" x 5.5"	Barnes & Jones	43-T
FAB-STJ-9592555	9.5" x 9.25" x 5.5"	Barnes & Jones	44-T
FAB-STJ-11597565	11.5" x 9.75" x 6.5"	Barnes & Jones	FT2015-8
FAB-STJ-11597565	11.5" x 9.75" x 6.5"	Hoffman	FT015H-8
FAB-STJ-070709	7" x 7" x 9"	Barnes & Jones	FT2015-6
FAB-STJ-070709	7" x 7" x 9"	Armstrong	B5-B6
FAB-STJ-070709	7" x 7" x 9"	Hoffman	FT015H-6
FAB-STJ-454505	4.5" x 4.5" x 5"	TLV	S3
FAB-STJ-57557505	5.75" x 5.75" x 5"	TLV	S5
FAB-STJ-030310	3" x 3" x 10"	Armstrong	2011

High Temperature Conveyor Belts

PTFE and Silicone Rubber Coated Fabrics – from .002 to .045 thickness

Light, Medium & Heavy Duty Coated or Porous



- We manufacture a variety of conveyor belts for applications such as screen printing, carpet fabrication, food processing, textile drying, etc.
- Splices available are Metallic, Non-Metallic and Endless.
- Tracking and Guides can be added to the belt, such as Guide Snaps, Grommets, or Silicone Rubber Guides.
- Edge Reinforcement can be heat-sealed edges, sewn & sealed fabric edge and heat sealed TFE Film edge.
- Two ply belts are available for packaging and heat-sealing applications.

How to Order a Belt – What We Need

- Dimensions of belt
- Splice Type
- Edge Reinforcement
- Tracking/Guides
- Pulley size and type
- Any special requirements

Please Contact Us With Your Belt Details for a Quotation

High Temperature Heat Resistant Sewing Thread

Kevlar® - Nomex® - Fiberglass - Quartz - Stainless



These threads are widely used in the fabrication and sewing of anything requiring high temperature capability. They are used in our own fabrication shops and we have years of experience in knowing what threads are used for which applications. Quality thread made in USA & Canada.

- Nomex® continuous is 662°F short term to 800°F.
- Kevlar® continuous is 320°F short term to 600°F.
- Fiberglass with ptfe coating continuous is 1100°F short term to 1400°F.
- 304 / Inox Stainless continuous is 1200°F short term to 1400°F.
- Quartz continuous is 1800°F short term to 2000°F.
- Alumina continuous is 2200°F short term to 2300°F.

Kevlar® and Nomex® are registered trademarks of DuPont.

Filament Kevlar® High Temperature Heat Resistant Sewing Thread

Meets MIL-T-87128 & A-A-55220



Kevlar is a high temperature resistant aramid fiber having a unique combination of toughness, high strength and thermal stability.

Both continuous multifilament and spun versions are available for a variety of sewing operations.

Continuous multifilament is available in both soft and bonded, but only in natural yellow color.

Spun thread is available in a range of dyed colors, and some of the larger sizes are also available glazed.

Excellent resistance to mildew and aging. Prolonged exposure to sunlight causes deterioration, but the fibers are self-screening. Good abrasion resistance.

FlameShield™ High Temperature & Heat Resistant Kevlar® Sewing Thread

Filament Kevlar® - All Spools are 1 pound / 455 grams - Color Yellow

Part Number	MIL-T-87128 Designation	Size	TEX	Diameter inch	Break Strength, Lbs	Yards per Lb
FAB-TH-KF-40-X	B/2 (200 x 2)		40		14	10,000
FAB-TH-KF-60-X	E/3 (200 x 3)		60	.008	23	6,700
FAB-TH-KF-80-X	F/4 (200 x 4)		80		30	5,000
FAB-TH-KF-120-X	FF/3 (400 x 3)		120	.012	45	3,350
FAB-TH-KFB-160	N/A		160		57	2,368
FAB-TH-KF-210-X	3 (400 x 5)		210		64	2,000
FAB-TH-KF-400-X	5 (1000 x 4)		400		135	950
FAB-TH-KF-500-X	6 (1500 x 3)		500		150	850
FAB-TH-KF-800-X	8 (1500 x 5)		800		225	500

- For the "X" Value, Specify B for Bonded, or P for Plain. Add \$22.61 per spool for bonded
- Also meets A-A-55220

Kevlar® and Nomex® are registered trademarks of DuPont.

Spun Kevlar® High Temperature Heat Resistant Sewing Thread



Kevlar is a high temperature resistant aramid fiber having a unique combination of toughness, high strength and thermal stability.

Both continuous multifilament and spun versions are available for a variety of sewing operations.

Continuous multifilament is available in both soft and bonded, but only in natural yellow color.

Spun thread is available in a range of dyed colors, and some of the larger sizes are also available glazed.

Excellent resistance to mildew and aging. Prolonged exposure to sunlight causes deterioration, but the fibers are self-screening. Good abrasion resistance.

Spun Kevlar is in compliance with the Canadian Standards CAN/CGSB 155.1-98 and CAN/CGSB 155.22-97. Meets requirements of NFPA 1971-1991 Standard on Protective clothing and NFPA 1974-1994 Standard on Fire Fighters Uniforms.

Kevlar® is certified by Underwriters Laboratories Inc. for use in protective clothing.

FlameShield™ High Temperature & Heat Resistant Kevlar® Sewing Thread Spun Kevlar® - All Spools are 1 pound / 455 grams - Color Yellow					
Part Number	Size	TEX	Diameter inch	Break Strength, Lbs	Yards per Lb
FAB-TH-KS-35-Y	30/2	35			12,000
FAB-TH-KS-40-Y	30/2	40	0.004"	7	12,000
FAB-TH-KS-50-Y	30/3	50			8,000
FAB-TH-KS-60-Y	30/3	60	0.006"	10	8,000
FAB-TH-KS-70-Y	30/4	70	0.007"	13	5,700
FAB-TH-KS-90-X-Y	30/5	90			5,000
FAB-TH-KS-100-X-Y	30/5	100	0.008"	17	4,800
FAB-TH-KS-105-X-Y	30/6	105			4,000

Kevlar® and Nomex® are registered trademarks of DuPont.

- For the "X" Value, Specify B for Glazed, or P for Plain. Add \$19.34 per spool for bonded
- For the "Y" Value, Specify N for Natural, and C for Colored. Add \$41.72 per spool for color.

Filament Nomex® and Spun Nomex® High Temperature Heat Resistant Sewing Thread

Meets MIL-T-83193B Type I



Nomex is a high temperature resistant fiber having a unique combination of toughness, high strength and thermal stability.

Both continuous multifilament and spun versions are available for a variety of sewing operations.

Continuous multifilament is available in both soft and bonded, but only in natural yellow color.

Spun thread is available in a range of dyed colors, and some of the larger sizes are also available glazed.

Excellent resistance to mildew and aging. Prolonged exposure to sunlight causes deterioration, but the fibers are self-screening. Good abrasion resistance.

FlameShield™ High Temperature & Heat Resistant Sewing Thread

Filament & Spun Nomex

Part Number	Material	Size	TEX	Diameter inch	Break Strength, Lbs	Yards per Lb
FAB-TH-NS-27	Spun Nomex		27		1.6	14,000
FAB-TH-NS-35	Spun Nomex		35		2.0	12,000
FAB-TH-NS-40	Spun Nomex		40		2.8	9,300
FAB-TH-NS-50	Spun Nomex		50		3.0	8,200
FAB-TH-NS-70	Spun Nomex		70		4.5	6,200
FAB-TH-NS-25* #	Spun Nomex	25	90	0.009"	6	4,850
FAB-TH-NB-69-N %	Bonded Nomex	69	60	0.011"	7.2	7,000
FAB-TH-NB-70-X #	Bonded Nomex	70	70	0.013"	8	4,850

Complies with CAN/CGSB-155.1-98 / CAN/CGSB-155.22-97, Meets Mil-T-83193 & A-A-55217.

% Meets A-A-50195, Mil-T-43436

Kevlar® and Nomex® are registered trademarks of DuPont.

High Temperature Heat Resistant Sewing Thread

Fiberglass - Quartz - Stainless



FlameShield™ High Temperature & Heat Resistant Sewing Thread								
Part Number	Material	Size	TEX	Diameter inch	Spool Weight, Lbs	Break Strength, Lbs	Yards per Lb	Natural Color
FAB-TH-FG-12	E-Fiberglass**	12	150	0.015"	2	18	2700	Gray
FAB-TH-FG-18 ****	E-Fiberglass**	18	210	0.017"	2	24	1800	Gray
FAB-TH-FG-24 *****	E-Fiberglass**	24	300	0.020"	2	30	1300	Gray
FAB-TH-FGINC-18	Fiberglass w/inconel**	18	210	0.100"	2	24	1800	Gray
FAB-TH-FGINC-24	Fiberglass w/inconel**	24	300	0.130"	2	30	1300	Gray
FAB-TH-QTZ-12	Quartz	12	150	0.014"	1	18	3450	Tan
FAB-TH-QTZ-18	Quartz	18	210	0.017"	1	24	2300	Tan
FAB-TH-QTZ-24	Quartz	24	300	0.020"	1	30	1700	Tan
FAB-TH-SSK-1064	3 strand Inox Stainless - Kevlar wrapped	1064	120	0.007"	2	28	4200	Yellow
FAB-TH-SSP-1064	10 strand 304 Stainless - Polyester wrapped	1064	120	.0145"	2	8	2150	White
FAB-TH-AL-31	Alumina	30		.031"	0.75		750	White

• **For the "X" value, Specify NAT for Natural, BLK for Black**

* Available Natural, Black, Orange, Red, Green ** Coated with PTFE *** Meets A-A-55220 & MIL-T-87128

**** Meets MIL-Y-1140C (Form 1, Class C) ***** Meets MIL-C-20079 (Type 3, Class 3)

Complies with CAN/CSB-155.1-98 / CAN/CSB-155.22-97, Meets Mil-T-83193 & A-A-55217.

% Meets A-A-50195, Mil-T-43436

Hook and Loop Closure – Nylon / Nomex®



Nylon hook and loop closure with Urethane/Acrylic backcoat with Flame Retardant additive. 225°F / 107°C Continuous; 300°F / 148°C for up to 1 hour; 459°F / 237°C melting point. Color is black. Nomex® is rated -70°F to 350°F (-56°C to 176°C)

Nylon meets the following specifications:

- MIL-F-21840 / A-A-55126 Type II Class I
- NFPA 1971-1991
- Automotive FMVSS 302
- FAA 25.853a (Aviation)
- Toxicity ATS1000 (Nylon only)

FlameShield™ Nylon Hook & Loop Flame Retardant Fastener			
Part Number	Material	Width	Reel length
FAB-VHL-NY-LOOP-10-B	Nylon	5/8"	50 yards
FAB-VHL-NY-HOOK-10-B	Nylon	5/8"	50 yards
FAB-VHL-NY-LOOP-12-B	Nylon	3/4"	50 yards
FAB-VHL-NY-HOOK-12-B	Nylon	3/4"	50 yards
FAB-VHL-NY-LOOP-16-B	Nylon	1"	50 yards
FAB-VHL-NY-HOOK-16-B	Nylon	1"	50 yards
FAB-VHL-NY-LOOP-32-B	Nylon	2"	50 yards
FAB-VHL-NY-HOOK-32-B	Nylon	2"	50 yards
FlameShield™ Nomex® Hook & Loop Fastener - White Color Transportation Use - Aviation / Rail / Ground / Marine Meets FAR 25.853 / Boeing DMS1982 Rev G / AA-55126B -70°F to 350°F (-56°C to 176°C)			
FAB-VHL-NM-HOOK-16	Nomex®	1	50 yards
FAB-VHL-NM-LOOP-16	Nomex®	1	50 yards
FAB-VHL-NM-HOOK-32	Nomex®	2	50 yards
FAB-VHL-NM-LOOP-32	Nomex®	2	50 yards

FlameShield™ Nylon Hook & Loop Specification

Strength

Sample Condition

Dry (ASTM 5169 & 5170) Peel: 1.0 lb/in width Shear: 13.8 lb/in²

3 laundering (AATCC-61/3A)
plus 3 Dry Clean (AATCC-
132) then 2,000 cycles

Peel: 0.67 lb/in width Shear: 8.3 lb/in²

Dimensions

Hook size: 8mil (.008") / 0.22 mm
Available Widths: 5/8", 3/4", 1", 1 1/2", 2", 4"
Hook Thickness: 0.077in (1.95mm)
Loop Thickness: 0.098 in (2.5mm)

Materials

Hook: Nylon, Woven
Backcoat: Urethane/Acrylic with F/R additive (type 2)
Hooks/in2: 220
Loop: Nylon, Woven
Backcoat: Urethane/Acrylic with F/R additive (type 2)

Properties

Sterilization: Gamma (Mrad): Yes
Autoclave: Yes

Chemical Resistance: **Acid** – Resistant to weak acids. Dissolved in mineral acids. Avoid concentrated acids
Alkali – Resistant to strong alkalis – recommend pH < 12.5 Temperature < 160°F
Oxidizers – Moderate resistance. Degraded by strong oxidizers. Keep temperature < 100°F
Solvents – Resistant to most common solvents. Less resistant to chlorinated solvents.

Fray Resistance: MIL F 21840: < 1/32 after 5 launderings

Operating Temperature: 225°F Continuous, 300°F < 1 hour, 459°F Melting Point

Shrinkage at boil: ASTM D2259; 1.5 – 2% at boil.

Certifications

MIL F 21840 / CID A-A-55126 Type II Class I

NFPA 1971 – 1991 Approved: NFPA 1975, 1977, 1976, 1971

Flammability: Automotive / FMVSS 302
FAA / 25.853B

Toxicity: ATS1000

Hook and Loop Closure – Stainless Steel

Heat, Flame and Chemical Resistant



Stainless Steel hook & Loop –
heat and chemical resistance

-70°F to 800°F (-56°C to 426°C)

- MIL-F-21840 / A-A-55126
Type II Class I.
- NFPA 1971-1991.
- Automotive FMVSS 302.
- FAA 25.853a (Aviation).
- Reel length is 25 yards.
- Width is 1".


FlameShield™ Stainless Steel Yarn Hook & Loop Fastener Flame / Fire / Chemical Resistant

Part Number	Material
FAB-VHL-SS-HOOK-16	Stainless Steel
FAB-VHL-SS-LOOP-16	Stainless Steel

High Temperature Heat & Flame Resistant Zippers

Metal teeth mounted on Nomex® support tape
Maximum temperature 650°F / 343°C

Meets NFPA 1971, 1975, 1977, 1951, 1999
CGSB 155.1, 155.2, 155.22. ASTM F1506, 1891. NFPA 70E, 2112, FMVSS 302
(Automotive), 25.853B FAA

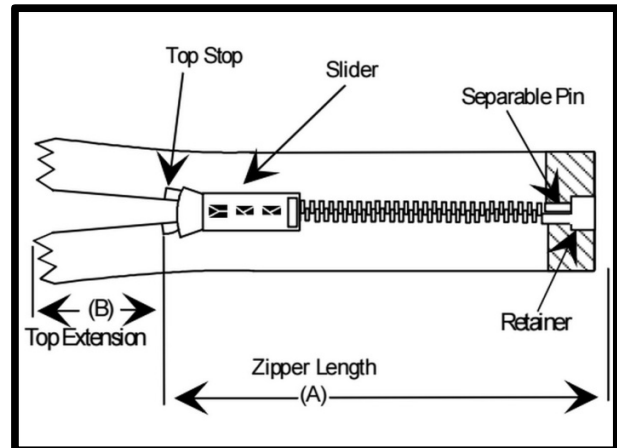

Brass Elements (Top Stop, Teeth, Slider, Retainer Ends) except slider spring and lock pin are stainless steel. Mounted on Nomex® tape.

Made to custom length:

Minimum length 8 inches. Maximum length 100 inches. Top extension 1 inch. Width 1 1/8 inch.



FlameShield™ High Temperature & Flame Retardant Zipper
Part Number
FAB-ZIP-X

- For the "X" value, Specify length in inches

Delivery time approximately 4 weeks

Scissors / Shears / Cutters

Designed for cutting of Sleeve, Tape, Rope & Fabrics

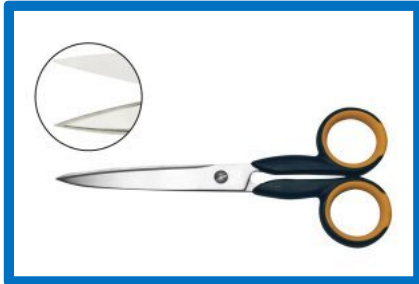

Scissors- Shears for Cutting and Trimming				
Part Number	Type	Blade	Length	Cutting Length
Kevlar Cutting				
TL-S-KEV-104	Snips	Straight – 1 serrated	6 ½"	0.875"
TL-S-KEV-2715	Scissors	Straight – 1 serrated	6"	2.6"
TL-S-KEV-2915	Scissors	Straight – 2 serrated	6"	2.6"
TL-S-KEV-2720	Offset Shear	Straight – 1 serrated	8"	3.3"
TL-S-KEV-2920	Offset Shear	Straight – 2 serrated	8"	3.3"
TL-S-KEV-HD-4720	HD Offset Shear	Straight – 1 serrated	8"	3.5"
TL-S-KEV-HD-4920	HD Offset Shear	Straight – 2 serrated	8"	3.5"
TL-S-KEV-HD-3725	HD Offset Shear	Straight – 1 serrated	10"	4.9"
TL-S-KEV-HD-3925	HD Offset Shear	Straight – 2 serrated	10"	4.9"
TL-S-KEV-HD-4730	HD Offset Shear	Straight – 1 serrated	12"	5.5"
TL-S-KEV-HD-4930	HD Offset Shear	Straight – 2 serrated	12"	5.5"

These scissors and shears are suitable for cutting most of our fiberglass, silica and ceramic products such as sleeve, tape, rope and fabric, plain and coated. They are especially useful for cutting Kevlar.

Kevlar products are difficult to cut due to their strength. Regular or heavy duty scissors can sometimes cut these materials, but often fail quickly as the Kevlar quickly dulls the cutting edge.

Kevlar Shears are specifically designed to cut Kevlar, and feature either one serrated blade or two serrated blades so that the fibers don't slip while cutting, holding the fiber in position and allowing for a greater shear force to be applied by the opposing blade.

These shears are Extra Heavy Duty, and can be used for other materials such as cutting steel wires and steel tie wraps.

The shears highlighted in **Yellow** are our most popular selling models for all fabric, sleeve and tape materials, and especially for Kevlar.

Stainless Steel Snaps

FlameShield™ Snap Caps, Posts, Sockets, Studs & Setting Tools Meets MIL-10884, MS27980 Style 2



Used to make fabrications and covers.

A set comprises a Cap / Socket on one side of the fabrication and a Post / Stud or a Screw Stud on the other side of the component.




- Standard material is Stainless Steel; other finishes such as Brass and Nickel Plate is available
- Standard Cap diameter is 0.6" / 15.24mm. Smaller is available
- Standard stud height is 0.24" / 6.1mm and is self piercing so no pre-punching of attached material is required.



FlameShield™ Snap Caps, Posts, Sockets, Studs & Setting Tools			
Part Number	Material	Diameter inch / mm	Height inch / mm
FAB-SNAP-SS-CAP	Stainless Steel	.6 / 15.24	.24 / 6.1
FAB-SNAP-SS-SOCKET	Stainless Steel		
FAB-SNAP-SS-POST	Stainless Steel	.555 / 14.10	.24 / 6.1
FAB-SNAP-SS-STUD	Stainless Steel		
FAB-SNAP-BTOOL	Bench Tool		
FAB-SNAP-HTOOL	Hand Tool		
FAB-SNAP-DIESET	Die Set		

Please inquire about screw studs

Stainless Steel Insulation Blanket Anchor Pins, Washers, Caps and Closures

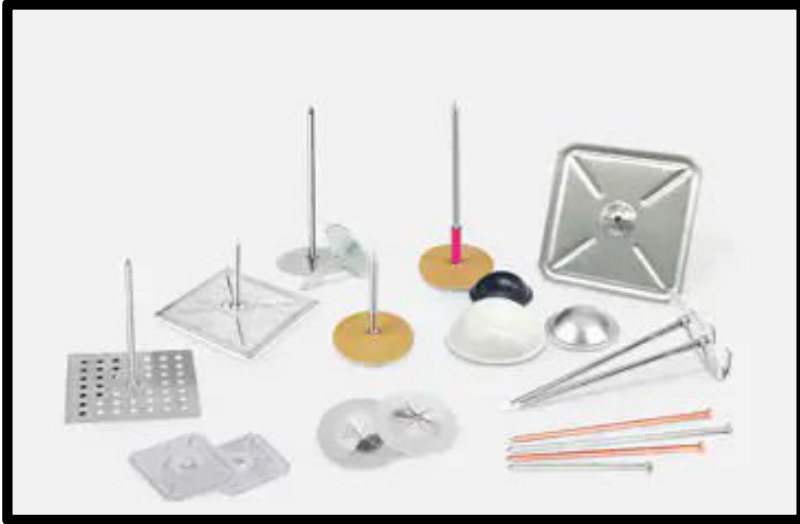

- Used to create a closure system for insulation blankets.
- Standard material is Stainless Steel.
- Please inquire.

Commercial Kitchen Duct Sealant & Gaskets



Generally, most city and municipal codes and regulations call for gaskets that are used within commercial kitchen ducts must withstand 1500°F exposure.

Most duct work is fabricated in 4 construction styles:

1. Butt fit duct with offset flange lip
2. Overlap fit
3. Butt fit with flush flange lips
4. Cone flange (fan unit attachment)

Traditional high temperature fabric gaskets can be used successfully by utilizing a high temperature non-flammable sealant to form a barrier.

DuctSeal™ high temperature paste sealant will withstand continuous exposure to 460°F, and provides a flexible barrier to grease migration into the flange gasket. In the event of a fire, the sealant will break down into silicon dioxide, a white –grey powdery refractory insulating material. Even with the sealant deteriorated, the high temperature gasket remains in place and provides the barrier to flame migration through the duct flange joint. DuctSeal™ paste must not be used as the primary seal/gasket on the duct flange surfaces – a separate high temperature gasket must be used in conjunction with DuctSeal™ paste.

As most duct flanges are fastened together with ¼" carbon steel or stainless steel bolts and associated hardware, and most flanges are 1", 1 ¼" or 1 ½" wide, the easiest gasket to use is a LadderTape gasket, which has a loose ladder construction in the center of the tape to allow for easy passing of the fastening bolts through it.

Tapes are also available with a Pressure Sensitive Adhesive (acrylic) which allows for easy the installation of the tape.

DuctSeal™ gasket tapes are available in 1800°F, 2000°F and 2300°F versions. Most installers prefer the LadderTape™ version of the gasket for ease of installation, but some installers may prefer traditional plain tapes, one on each side of the bolt-hole line.

DuctSeal™ High Temperature Sealant / Paste: Commercial Kitchen Silicone Sealant



DuctSeal™ Paste Duct Flange Sealant Paste

This sealant is used to form a bead ahead of the gasket tape in the flange area of commercial kitchen grease ducts in order to keep grease from contaminating the gasket tape.

Can be used to 500°F continuous without degradation.

In the event of a fire, the elevated temperatures will decompose the sealant, turning it into a white insulating powder through a process called caramelization.

During the fire, the gasket tape itself will maintain the seal in the flange. The sealant is available in Oxide-Red and Black.




Available in two sizes:

- 3 oz squeeze tube.
P/N US-DSP-03-OR
- 10.3 oz caulking gun cartridge.
P/N US-DSP-10-OR


US-DSP paste meets the following specifications:

- MIL-A-46106A
- TT-S-001543A
- TT-S-00230C
- FDA Extractive Requirements CFR 177.2600
- USDA Rating P-1
- NSF/ANSI STD 51

DuctSeal™ Grease Duct Access Doors

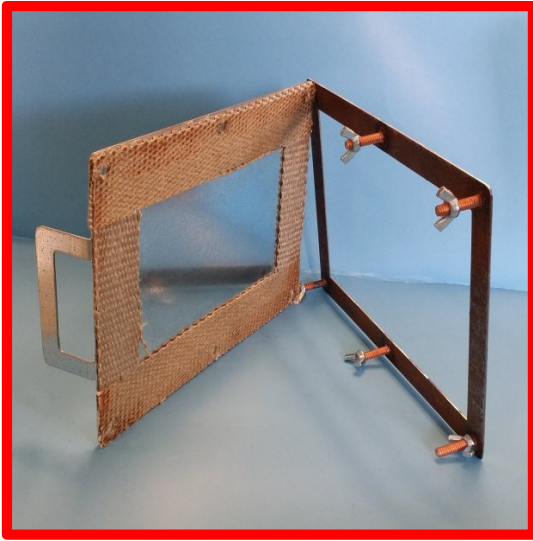

- Heavy Duty 16 gauge steel construction
- Stainless Steel models available
- Available with extended studs to accommodate fire wrap
- Back frame reinforces duct cut-out
- Easy to clean and install
- Standard and custom sizes available
- Gasket rated to 2300°F and is bonded to front panel

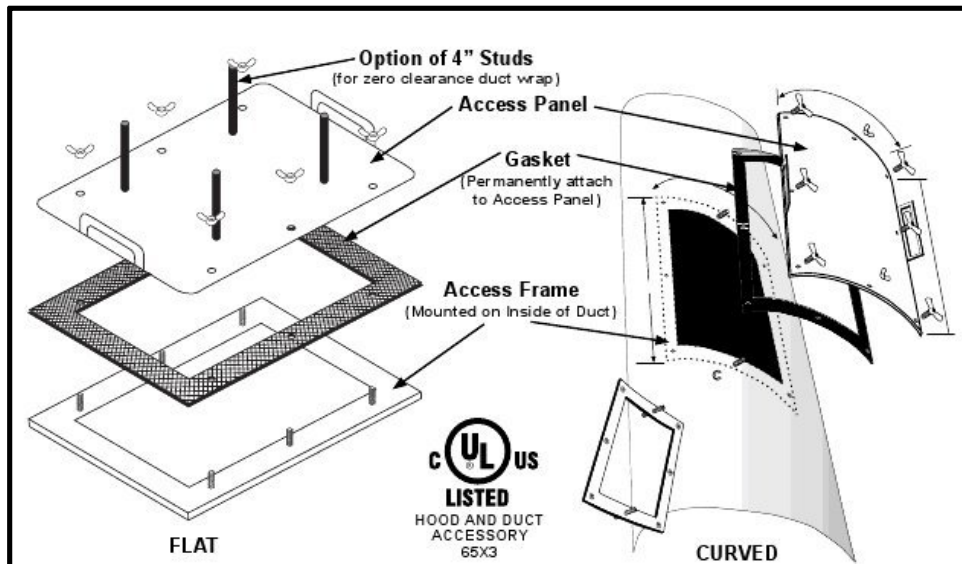

Pricing:

Flat Access Doors

DUCTDOOR-F-1
DUCTDOOR-F-2
DUCTDOOR-F-3
DUCTDOOR-F-4
DUCTDOOR-F-5
DUCTDOOR-F-6
DUCTDOOR-F-7
DUCTDOOR-F-8
DUCTDOOR-F-9
DUCTDOOR-F-10
DUCTDOOR-F-11

Curved Access Doors


DUCTDOOR-C-1
DUCTDOOR-C-2
DUCTDOOR-C-3
DUCTDOOR-C-4
DUCTDOOR-C-5
DUCTDOOR-C-6
DUCTDOOR-C-7
DUCTDOOR-C-8
DUCTDOOR-C-9
DUCTDOOR-C-10
DUCTDOOR-C-11

Flat Doors



HOOD AND DUCT
ACCESSORY
65X3

NFPA #96

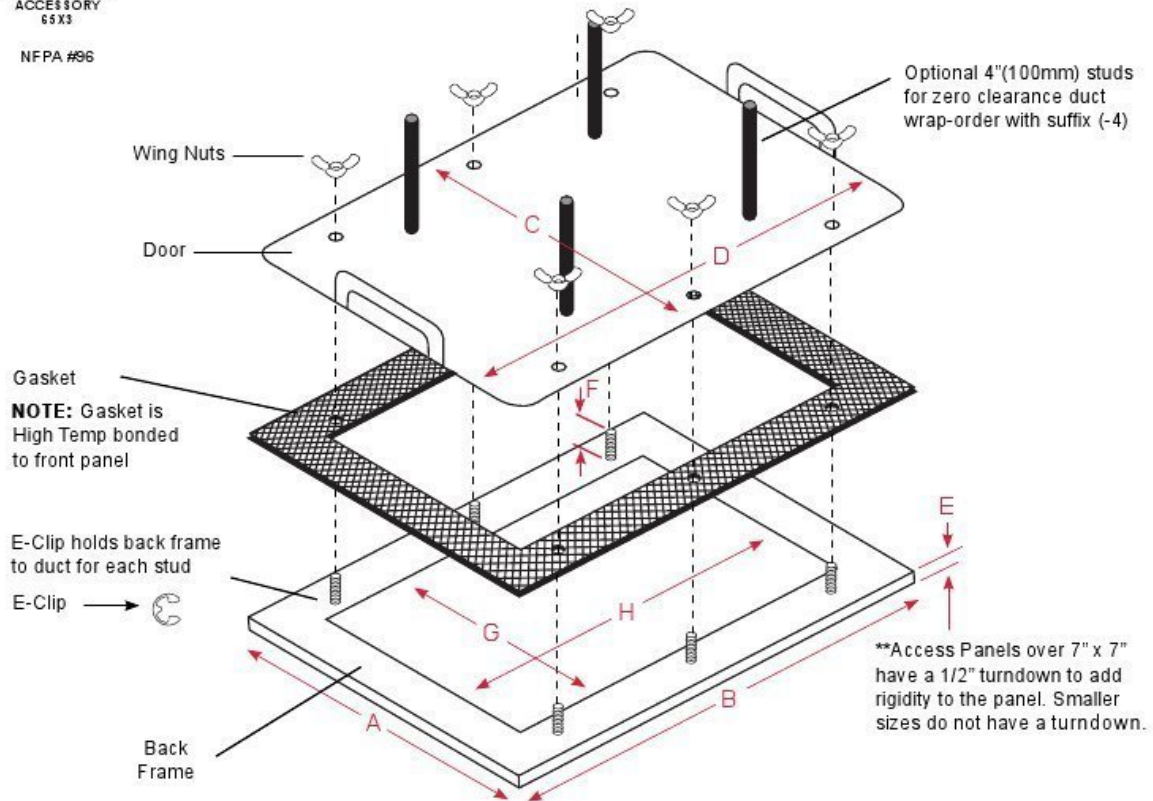


Please Order by Part No.	BACK FRAME OUTSIDE DIMENSION		FRONT PANEL OUTSIDE DIMENSION		PANEL WIDTH	STUD HEIGHT	HOLE SIZE • BACK FRAME INSIDE DIMENSION		MOUNTING STUDS
PART NO.	A*	B*	C	D	E	F	G	H	
DUCTDOOR-F-1	7"	10"	7"	10"	Flat	1"	5.5"	8.5"	6
DUCTDOOR-F-2	7"	15"	7"	15"	Flat	1"	5.5"	13.5"	6
DUCTDOOR-F-3	7"	23"	7"	23"	Flat	1"	5.5"	21.5"	10
DUCTDOOR-F-4	8"	8"	8"	8"	Flat	1"	6"	6"	4
DUCTDOOR-F-5	10"	10"	10"	10"	.5"	1"	7"	7"	4
DUCTDOOR-F-6	10"	15"	10"	15"	.5"	1"	7"	12"	6
DUCTDOOR-F-7	10"	23"	10"	23"	.5"	1"	7"	20"	10
DUCTDOOR-F-8	15"	15"	15"	15"	.5"	1"	12"	12"	8
DUCTDOOR-F-9	15"	23"	15"	23"	.5"	1"	12"	20"	14
DUCTDOOR-F-10	19"	23"	19"	23"	.5"	1"	16"	20"	16
DUCTDOOR-F-11	23"	23"	23"	23"	.5"	1"	20"	20"	16

Curved Doors




NFPA #96

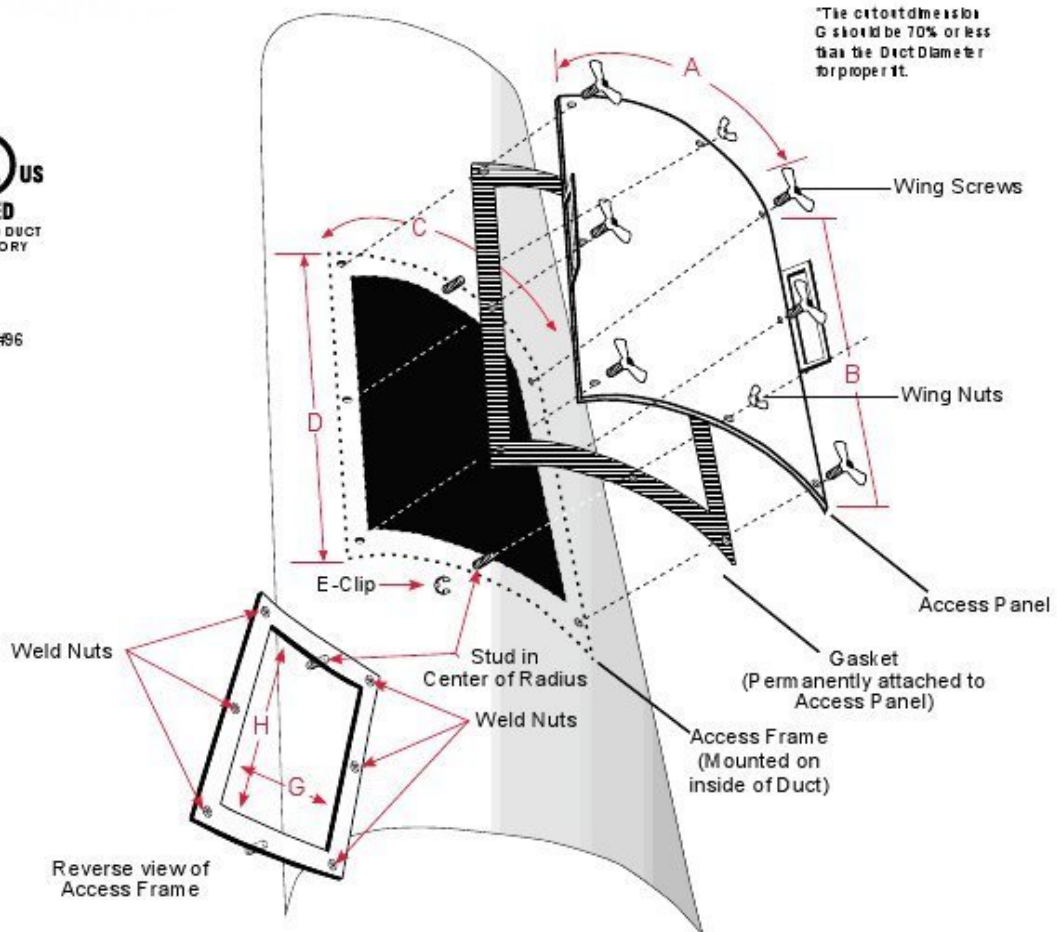

Please Order by Part No.	OUTSIDE DIMENSIONS				HOLE SIZE INSIDE DIMENSIONS	
PART NO.	A	B	C	D	G*	H
DUCTDOOR-C-1	6.56"	6.75"	6.56"	6.75"	5.06"	5.25"
DUCTDOOR-C-2	6.50"	12.75"	6.50"	12.75"	5.00"	11.25"
DUCTDOOR-C-3	6.50"	18.75"	6.50"	18.75"	5.00"	17.25"
DUCTDOOR-C-4	9.50"	9.75"	9.50"	9.75"	8.00"	8.25"
DUCTDOOR-C-5	9.50"	12.75"	9.50"	12.75"	8.00"	11.25"
DUCTDOOR-C-6	9.50"	18.75"	9.50"	18.75"	8.00"	17.25"
DUCTDOOR-C-7	9.50"	24.75"	9.50"	24.75"	8.00"	23.25"
DUCTDOOR-C-8	12.50"	18.75"	12.50"	18.75"	11.00"	17.25"
DUCTDOOR-C-9	12.50"	24.75"	12.50"	24.75"	11.00"	23.25"
DUCTDOOR-C-10	18.50"	18.75"	18.50"	18.75"	17.00"	17.25"
DUCTDOOR-C-11	18.50"	24.75"	18.50"	24.75"	17.00"	23.25"

Custom Door Quote: Flat Doors

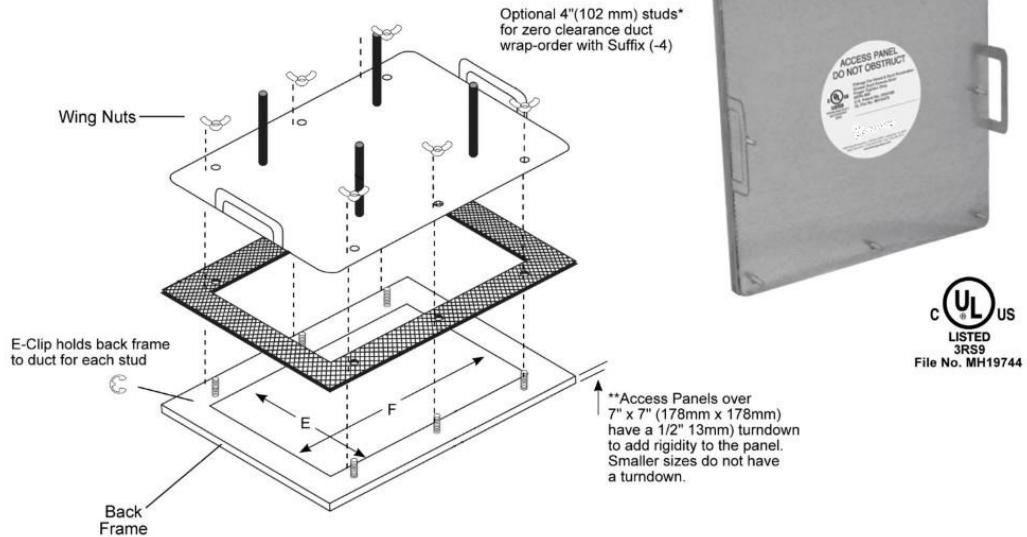

DIMENSIONS	SIZE	INCHES or MM
DIMENSION "E"		
DIMENSION "F"		

QUANTITY REQUIRED	DESCRIPTION
	16 GA. GALVANIZED STEEL WITH ZINC PLATED STEEL MOUNTING HARDWARE
	16 GA. 304 STAINLESS STEEL WITH 304 STAINLESS STEEL MOUNTING HARDWARE
	18 GA. 304 STAINLESS STEEL WITH 304 STAINLESS STEEL MOUNTING HARDWARE


Additional Notes

Date:	P.O. #	Account No:
Company Name:	Contact Name:	
Address:	City & State:	Zip:
Phone No:	E-mail:	

Custom Door Quote: Curved Doors



NFPA #96
UL FILE No. MH16475

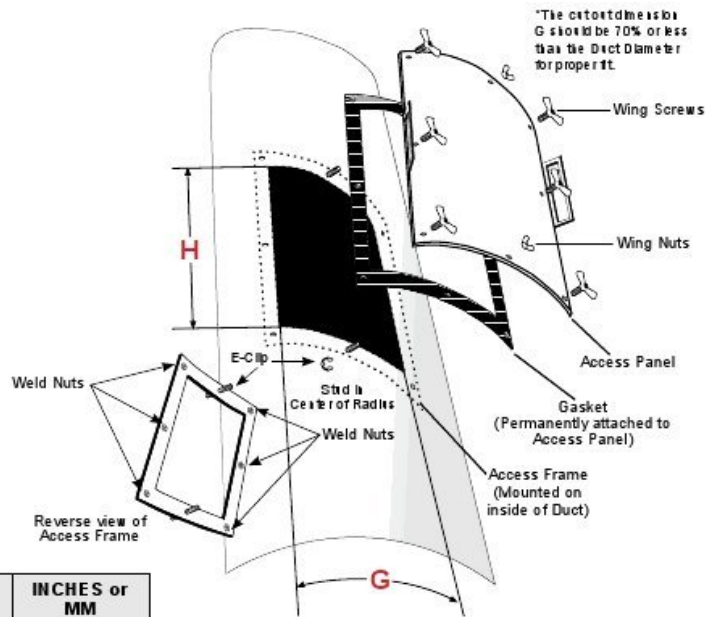

DIMENSIONS	SIZE	INCHES or MM
DUCT DIAMETER "A"		
CUT OUT DIMENSION "G" "G" = 70% x "A" or LESS		
IF LESS THAN 70% GIVE SIZE		
CUT OUT DIMENSION "H"		
NFPA 96 prohibits duct cut out greater than 70% of the duct diameter		

QUANTITY REQUIRED	
----------------------	--

PANEL MATERIAL	Check One
GALVANIZED STEEL	☐
STAINLESS STEEL 304	☐
STAINLESS STEEL 316L	☐

PANEL THICKNESS	Check One
.050" (1.3mm) S/S Models only	☐
.060" (1.5mm)	☐
.125" (3.2mm)	☐


MOUNTING HARDWARE MATERIAL	Check One
ZINC PLATED STEEL	☐
STAINLESS STEEL 304	☐
STAINLESS STEEL 316L	☐

Additional Notes


Date:	PO. #	Account No:
Company Name:	Contact Name:	
Address:	City & State:	Zip:
Phone No:	E-mail:	

DuctSeal™ Applications:


Apply a bead of sealant at this point around the perimeter of the duct/flange location

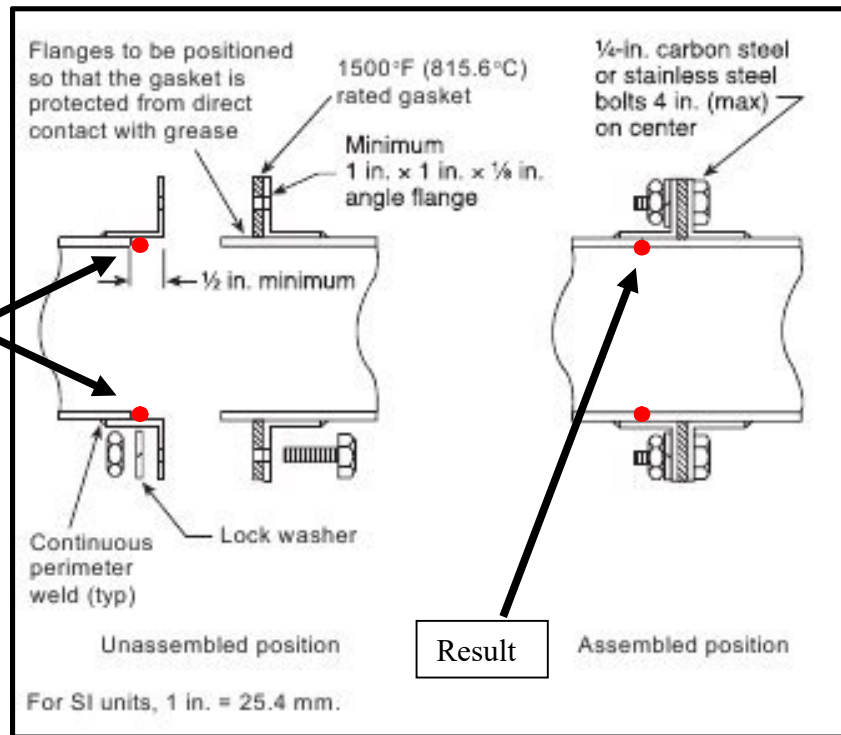

Apply a bead of sealant at this point around the perimeter of the duct/gasket location

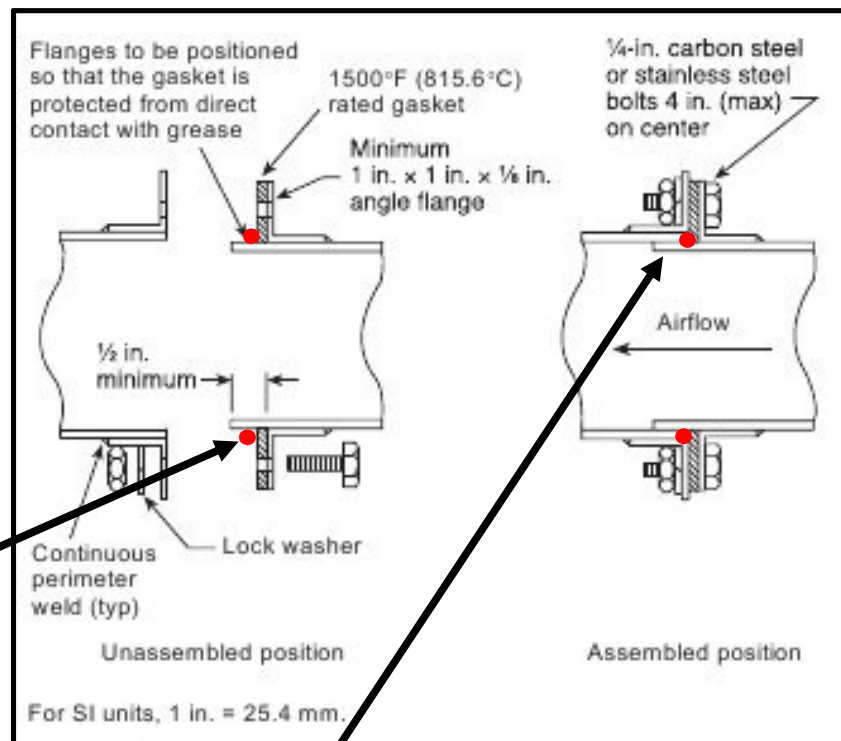


Apply a bead of sealant at this point around the perimeter of the flange, at the base of the gasket.

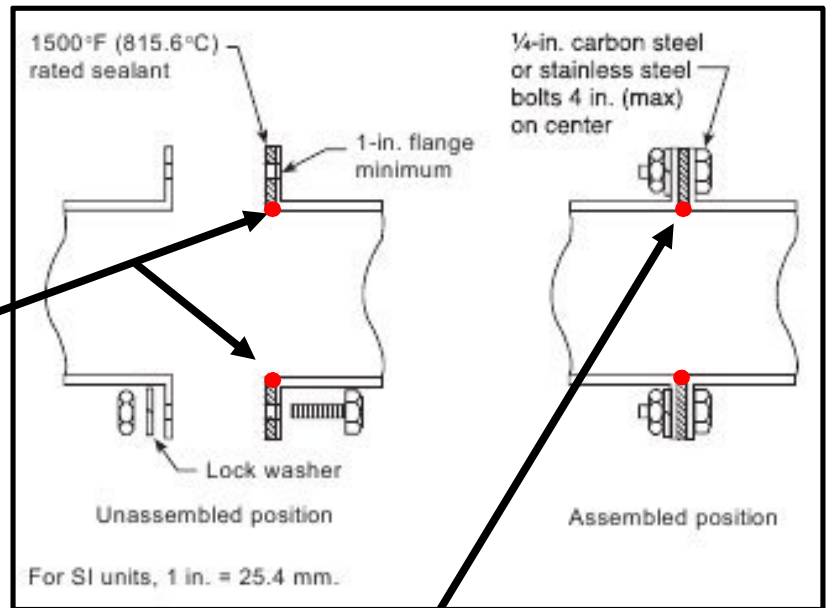

Result

Apply a bead of sealant at this point around the perimeter of the cone.

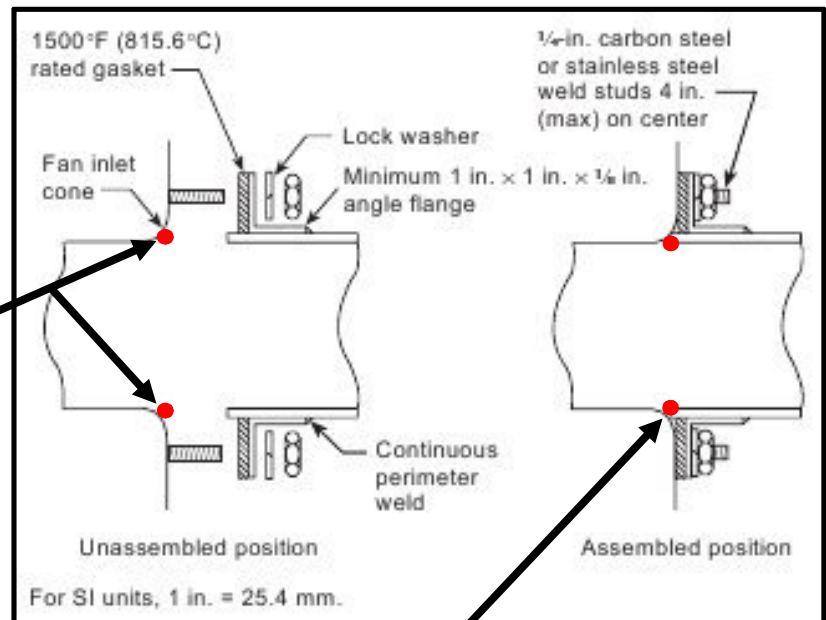

Result

High Temperature, Heat, Flame, Fire, Molten Metal & Weld Splatter Protection Materials

Fax Orders: 610-340-9054 Telephone Orders: 610-906-3549 orders@abthermal.com
