


Hydraulic Blowout Protection Sleeve - SuperGuard™

325°F / 162°C Maximum Continuous
Protects Personnel from Hydraulic Hose & Line Blowout

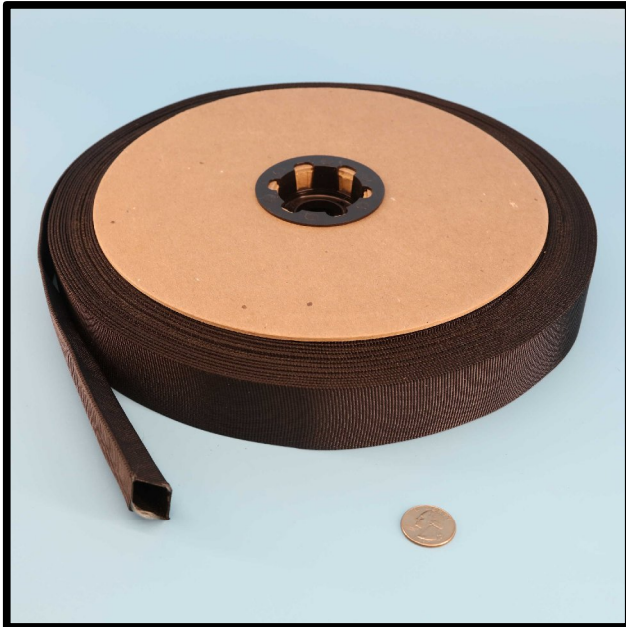

- SuperGuard™ Proprietary construction provides protection from blowout to 13,000 PSI.
- Abrasion, wear, puncture and cut resistant protection sleeve for hydraulic hoses and lines.
- Exceeds the new "Line of Sight" operator protection regulations EN982 ISO norm 833 EN414 for hose blowout.
- Ultra dense construction is 3 times the density of our most heavy duty abrasion protection sleeve.
- Smooth surface resists abrasive wear and tight weave contains fluid loss.
- Excellent UV resistance.
- MSHA IC 171/2 approved.
- Exceeds ISO 6945 abrasion standard and ISO 8031 conductivity standard.
- Easily cut to length or cut with heat knife.
- Useable -60°F to +325°F.
- NOTE: This sleeve should NOT fit tightly on the hose it is protecting, but have a clearance of ½" to 1".
- Also meets ISO 3457, ISO 4413, MDG41

SuperGuard™ Hydraulic Blowout Protection Sleeve – 150 foot coil				
Part Number	Nominal ID Size			Price per Coil
	inch	mm	-dash	
S-NY-BPS-M017-11	0.67	17	-11	\$ 144.00
S-NY-BPS-M020-13	0.79	20	-13	\$ 148.50
S-NY-BPS-M023-14	0.91	23	-15	\$ 154.50
S-NY-BPS-M025-16	0.98	25	-16	\$ 163.50
S-NY-BPS-M027-17	1.06	27	-17	\$ 181.50
S-NY-BPS-M031-19	1.22	31	-19	\$ 192.00
S-NY-BPS-M036-22	1.42	36	-22	\$ 207.00
S-NY-BPS-M040-27	1.57	40	-27	\$ 217.50
S-NY-BPS-M044-28	1.73	44	-28	\$ 232.50
S-NY-BPS-M047-29	1.85	47	--29	\$ 268.50
S-NY-BPS-M055-34	2.17	55	-34	\$ 309.00
S-NY-BPS-M059-37	2.36	59	-37	\$ 336.00
S-NY-BPS-M066-41	2.62	66	-41	\$ 397.50
S-NY-BPS-M072-45	2.87	72	-45	\$ 454.50

- Some items may be available By-The-Foot or in 50 or 100 foot coils.
- This sleeve is non-expandable – please measure your application carefully.