


Fax Orders: 610-340-9054 Telephone Orders: 610-906-3549 orders@abthermal.com

Precision Fiberglass Tadpole Gasket Tape Oven / Stove / Boiler / Kiln / Paint Booth / Clean Room Door Seals 1200°F / 648°C TadpoleTape™ Very High Temperature & Heat Resistant



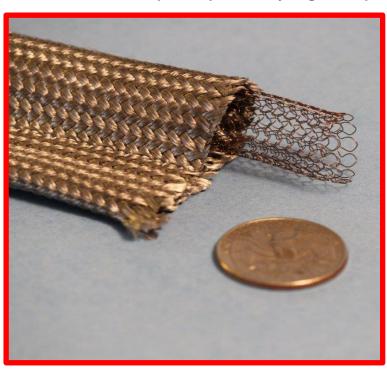

- Precision Tadpole with consistent dimension of bulb and tail.
- Small tail is hollow, and can be supplied filled with a cord or rope to use as a mounting point with slotted metalwork.
- High pushback 304 stainless steel hollow sleeve inside of bulb provides excellent pushback with low compression set.
- Heat treated to result in an extremely clean surface that sheds extremely few fibers and no organic odors. Suitable for paint booth and food service applications.
- Fabricated from high quality type E fiberglass that will not burn and will withstand continuous exposure to temperatures of 1200°F / 648°C.
- This product resists most acids and alkalis and is unaffected by most bleaches and solvents. It is highly flexible and conformable. The base fiber is manufactured to the specifications of ASTM D-578, ASTM committee D13, and subcommittee D13.18.

Two sizes available:

- 1) 1 3/8 inch OAW (Over All Width) with a 5/8" Bulb with hollow 304 stainless steel mesh core bulb material, with 3/4" tail. The knitted wire mesh core provides excellent compression and pushback and high cycle life. ID of the hollow metal mesh bulb core is 1/2 inch. Weight is 1.75oz per foot.
- 1 1/4 inch OAW (Over All Width) with a 1/2" Bulb with hollow 304 stainless steel mesh 2) core bulb material, with 3/4" tail. The knitted wire mesh core provides excellent compression and pushback and high cycle life. ID of the hollow metal mesh bulb core is 7/16 inch. Weight is 1.20oz per foot.

Very High Temperature & Heat Resistant Heat Treated Fiberglass Precision Tadpole Gasket Tape with Hollow Stainless Steel Knit Mesh Core

Part Number	Bulb Size	Feet / Metres per coil
TT-FG-HSSMC-M013-08-25-X	1/2"	25 / 7.6
TT-FG HSSMC-M013-08-50-X	1/2"	50 / 15.2
TT-FG HSSMC-M013-08-250-X	1/2"	250 / 76.2
TT-FG HSSMC-M013-08-BTF-X	1/2"	By The Foot
TT-FG-HSSMC-M016-10-25-X	5/8"	25 / 7.6
TT-FG HSSMC-M016-10-50-X	5/8"	50 / 15.2
TT-FG HSSMC-M016-10-250-X	5/8"	250 / 76.2
TT-FG HSSMC-M016-10-BTF-X	5/8"	By The Foot

Genuine TadpoleTape™ gasket is designed to provide a high temperature thermal seal in industrial, laboratory and commercial ovens and dryers. Used on residential self cleaning ovens as a door gasket seal.

Custom sized tadpole gasket tapes are available